

6

5

4

3

2


1

APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	3/30/16	
A		UPDATED SPEC.	6/20/16	HR/CK


4.30mm Length

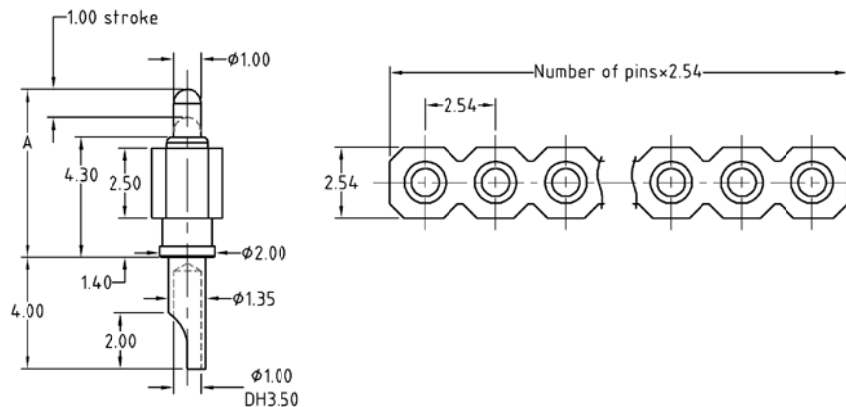

Positions: 01 thru 40

ADAM P/N	Initial Height
PH1-3B-XX-MVS-4355	5.5mm
PH1-3B-XX-MVS-4360	6.0mm

5.30mm Length

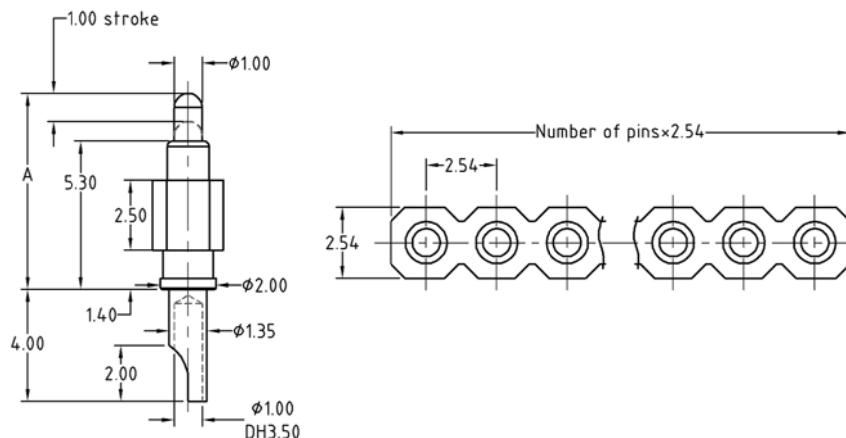

Positions: 01 thru 40

ADAM P/N	Initial Height
PH1-3B-XX-MVS-5365	6.5mm
PH1-3B-XX-MVS-5370	7.0mm
PH1-3B-XX-MVS-5375	7.5mm
PH1-3B-XX-MVS-5380	8.0mm

SPECIFICATIONS:

Material:
 Insulator: Black plastics, Color: Black, rated UL 94V-0
 Plunger: Brass, Gold plated
 Barrel: Brass, Gold plated
 Spring: SUS Surface treatment
 Electrical:

Voltage rating: 12 VDC max
 Current rating: 3 A max
 Contact resistance: 20 mohms max

Mechanical:
 Spring force: 70g±20g @ 1.0mm working stroke
 Full stroke: 1.40mm
 Life test: 1,000,000 Cycles
 Temperature Rating:
 Operating temperature: -40°C to +80°C
Environmental:
 Lead free, RoHS compliant.



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MILLIMETERS TOLERANCES: EXCEPT AS NOTED HOLES			
MM		HOLES	
.X	± .25	Ø.XX	± .013
.XX	± .15		
.XXX	± .05		
APPROVALS		DATE	
DRAWN	HR	3/30/16	
CHECKED	CK	3/30/16	
APPROVED			

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: CUSTOM LENGTH TUBE SINGLE ROW STRIPS
 2.50MM INSULATOR HEIGHT, SOLDER CUP

SIZE	PART NO.	REV.
X	PH1-3B-XX-MVS-XXXX	A
REF:	S00170C	SCALE: NTS SHEET 1 OF 1

6

5

4

3

2

1