

LED DOT MATRIX

BL-M10X571

Features:

- 26.54mm (1.0") Φ 2.54 dot matrix LED display.
- Low current operation.
- Excellent character appearance.
- Easy mounting on P.C. Boards or sockets.
- I.C. Compatible.
- ROHS Compliance.



Super Bright

Electrical-optical characteristics: (Ta=25° C) (Test Condition: IF=20mA)

Part No		Chip			VF Unit:V		Iv TYP.(mcd)
Row Cathode Column Anode	Row Anode Column Cathode	Emitted Color	Material	λ_p (nm)	Typ	Max	
BL-M10E571S-XX	BL-M10F571S-XX	Hi Red	GaAlAs/GaAs,SH	660	1.85	2.20	100
BL-M10E571D-XX	BL-M10F571D-XX	Super Red	GaAlAs/GaAs,DH	660	1.85	2.20	110
BL-M10E571UR-XX	BL-M10F571UR-XX	Ultra Red	GaAlAs/GaAs,DDH	660	1.85	2.20	120
BL-M10E571E-XX	BL-M10F571E-XX	Red	GaAsP/GaP	635	2.10	2.50	90
BL-M10E571Y-XX	BL-M10F571Y-XX	Yellow	GaAsP/GaP	585	2.10	2.50	90
BL-M10E571G-XX	BL-M10F571G-XX	Green	GaP/GaP	570	2.20	2.50	95

Ultra Bright

Electrical-optical characteristics: (Ta=25° C) (Test Condition: IF=20mA)

Part No		Chip			VF Unit:V		Iv TYP.(mcd)
Row Cathode Column Anode	Row Anode Column Cathode	Emitted Color	Material	λ_p (nm)	Typ	Max	
BL-M10E571UHR-XX	BL-M10F571UHR-XX	Ultra Red	AlGaInP	645	2.10	2.50	120
BL-M10E571UE-XX	BL-M10F571UE-XX	Ultra Red	AlGaInP	630	2.10	2.50	100
BL-M10E571YO-XX	BL-M10F571YO-XX	Ultra Amber	AlGaInP	619	2.10	2.50	100
BL-M10E571UY-XX	BL-M10F571UY-XX	Ultra Yellow	AlGaInP	590	2.10	2.50	100
BL-M10E571UG-XX	BL-M10F571UG-XX	Ultra Green	AlGaInP	574	2.20	2.50	130
BL-M10E571PG-XX	BL-M10F571PG-XX	Ultra Pure Green	InGaN	525	3.80	4.50	150
BL-M10E571B-XX	BL-M10F571B-XX	Ultra Blue	InGaN	470	2.70	4.20	70
BL-M10E571W-XX	BL-M10F571W-XX	Ultra White	InGaN	/	2.70	4.20	100

-XX: Surface / Lens color:

Number	0	1	2	3	4	5
Ref Surface Color	White	Black	Gray	Red	Green	
Epoxy Color	Water clear	White diffused	Red Diffused	Green Diffused	Yellow Diffused	

LED DOT MATRIX
BL-M10X571
Absolute maximum ratings (Ta=25°C)

Parameter	S	D	UR	E	Y	G	Unit
Forward Current I_F	25	25	25	25	25	30	mA
Power Dissipation P_d	60	60	60	60	60	65	mW
Reverse Voltage V_R	5	5	5	5	5	5	V
Peak Forward Current I_{PF} (Duty 1/10 @1KHZ)	150	150	150	150	150	150	mA
Operation Temperature T_{OPR}	-40 to +80						°C
Storage Temperature T_{STG}	-40 to +85						°C
Lead Soldering Temperature T_{SOL}	Max.260±5°C for 3 sec Max. (1.6mm from the base of the epoxy bulb)						°C

■ Absolute maximum ratings (Ta=25°C)


Parameter	UHR	UE	YO	UY	UG	PG	B	W	Unit
Forward Current I_F	30	30	30	30	30	30	30	30	mA
Power Dissipation P_d	75	65	65	65	75	110	120	120	mW
Reverse Voltage V_R	5	5	5	5	5	5	5	5	V
Peak Forward Current I_{PF} (Duty 1/10 @1KHZ)	150	150	150	150	150	150	100	100	mA
Operation Temperature T_{OPR}	-40 to +80								°C
Storage Temperature T_{STG}	-40 to +85								°C
Lead Soldering Temperature T_{SOL}	Max.260±5°C for 3 sec Max. (1.6mm from the base of the epoxy bulb)								°C

LED DOT MATRIX


BL-M10X571

■ Package configuration & Internal circuit diagram


BL-M10X571 Series

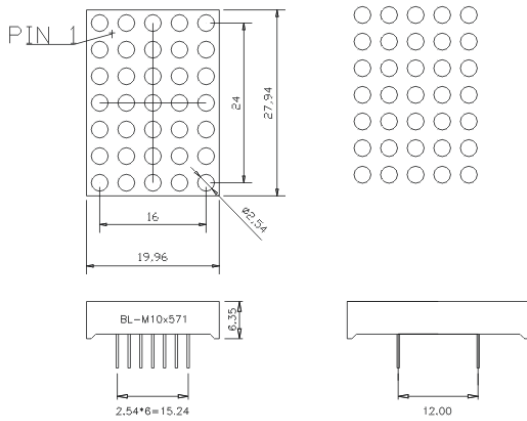

BL-M10E571



BL-M10F571



Notes:

1. All dimensions are in millimeters (inches)
2. Tolerance is $\pm 0.25(0.01)$ unless otherwise noted.
3. Specifications are subject to change without notice.

LED DOT MATRIX

BL-M10X571

Typical electrical-optical characteristics curves:



- (1) - GaAsP/GaAs 655nm/Red
- (2) - GaP 570nm/Yellow Green
- (3) - GaAsP/GaP 585nm/Yellow
- (4) - GaAsP/GaP 635nm/Orange & Hi-Eff Red
- (5) - GaP 700nm/Bright Red
- (6) - GaAlAs/GaAs 660nm/Super Red
- (8) - GaAsP/GaP 610nm/Super Red
- (9) - GaAlAs 880nm
- (10) - GaAs/GaAs & GaAlAs/GaAs 940nm
- (A) - GaN/SiC 430nm/Blue
- (B) - InGaN/SiC 470nm/Blue
- (C) - InGaN/SiC 505nm/Ultra Green
- (D) - InGaN/SiC 525nm/Ultra Green



FORWARD VOLTAGE (Vf)
FORWARD CURRENT VS.
FORWARD VOLTAGE



FORWARD CURRENT (mA)
RELATIVE LUMINOUS
INTENSITY VS. FORWARD
CURRENT



AMBIENT TEMPERATURE Ta(°C)
FORWARD CURRENT VS. AMBIENT
TEMPERATURE



AMBIENT TEMPERATURE Ta(°C)



NOTE:25°C free air temperature unless otherwise specified

LED DOT MATRIX

BL-M10X571

■ Packing and weighting

