

Features


- $R_{DS(ON)}, V_{GS}@10V, I_D@3.5A < 1.6\Omega$
- Fast switching capability
- Low gate charge
- Lead free in compliance with EU RoHS directive.
- Green molding compound

PRODUCT SUMMARY

V_{DS} (V)	Current(A)	$R_{DS(on)}$ (Ω)
700	7	1.6 @ $V_{GS} = 10V$

Mechanical Data

- Case: TO-220, ITO-220, TO-262, TO-263 Package

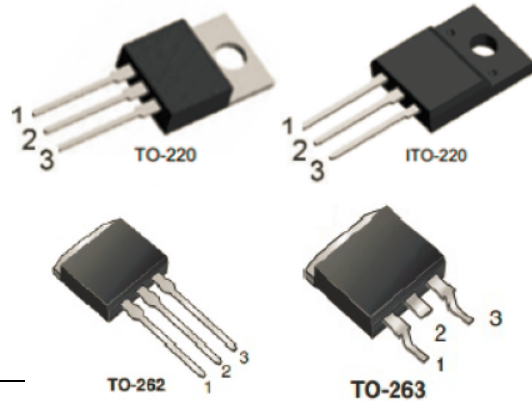


Pin Definition:

1. Gate
2. Drain
3. Source

Ordering Information

Part No.	Package	Packing
DMT7N70-TU	TO-220	50pcs / Tube
DMF7N70-TU	ITO-220	50pcs / Tube
DMK7N70-TU	TO-262	50pcs / Tube
DMG7N70-TU	TO-263	50pcs / Tube
DMG7N70-TR	TO-263	800pcs / 13" Reel

Block Diagram

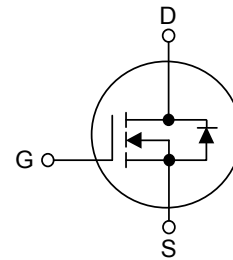

ABSOLUTE MAXIMUM RATINGS ($T_C=25^\circ\text{C}$, unless otherwise specified)

PARAMETER		SYMBOL	RATINGS	UNIT
Drain-Source Voltage		V_{DSS}	700	V
Gate-Source Voltage		V_{GSS}	± 30	V
Continuous Drain Current		I_D	7	A
Pulsed Drain Current		I_{DM}	28	A
Single Pulse Avalanche Energy ^(Note 1)		E_{AS}	530	mJ
Power Dissipation	TO-220/TO-262/TO-263	P_D	142	W
	ITO-220		45	W
Junction Temperature		T_J	+150	$^\circ\text{C}$
Operating Temperature		T_{OPR}	-55 ~ +150	$^\circ\text{C}$
Storage Temperature		T_{STG}	-55 ~ +150	$^\circ\text{C}$

NOTES :

1. $L=19.5\text{mH}, I_{AS}=7\text{A}, V_{DD}=50\text{V}, R_G=25\text{ohm}$, Starting $T_J=25^\circ\text{C}$
2. Pulse width $\leq 300\mu\text{s}$, Duty cycle $\leq 2\%$
3. Essentially independent of operating temperature typical characteristics.
4. Guaranteed by design, not subject to production testing







THERMAL DATA

PARAMETER		SYMBOL	RATING	UNIT
Junction to Ambient	TO-220/TO-262/TO-263	θ_{JA}	62.5	°C/W
	ITO-220			
Junction to Case	TO-220/TO-262/TO-263	θ_{JC}	0.9	°C/W
	ITO-220		2.6	

ELECTRICAL CHARACTERISTICS ($T_C=25^\circ\text{C}$, unless otherwise specified)


PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNITS
Static						
Drain-Source Breakdown Voltage	BV_{DSS}	$V_{GS}=0V, I_D=250\mu A$	700	-	-	V
Gate Threshold Voltage	$V_{GS(th)}$	$V_{DS}=V_{GS}, I_D=250\mu A$	2	-	4	V
Drain-Source On-State Resistance	$R_{DS(on)}$	$V_{GS}=10V, I_D=3.5A$	-	1.4	1.6	Ω
Zero Gate Voltage Drain Current	I_{DSS}	$V_{DS}=700V, V_{GS}=0V$	-	-	1.0	μA
Gate-Source Leakage Current	I_{GSS}	$V_{GS}=\pm 30V, V_{DS}=0V$	-	-	± 100	nA
Diode Forward Voltage	V_{SD}	$I_S=7A, V_{GS}=0V$	-	-	1.4	V
Dynamic (Note 4)						
Total Gate Charge	Q_g	$V_{DS}=100V, I_D=7A,$ $V_{GS}=10V$ (Note 2,3)	-	163	-	nC
Gate-Source Charge	Q_{gs}		-	12	-	
Gate-Drain Charge	Q_{gd}		-	30	-	
Input Capacitance	C_{iss}	$V_{DS}=25V, V_{GS}=0V,$ $f=1.0\text{MHz}$	-	1200	1600	pF
Output Capacitance	C_{oss}		-	150	190	
Reverse Transfer Capacitance	C_{rss}		-	60	80	
Turn-On Delay Time	$t_{d(on)}$	$V_{DD}=30V, I_D=1A,$ $R_G=25\Omega$ (Note 2,3)	-	60	80	ns
Turn-On Rise Time	t_r		-	200	230	
Turn-Off Delay Time	$t_{d(off)}$		-	280	350	
Turn-Off Fall Time	t_f		-	250	300	
Drain-Source Diode						
Maximum Continuous Drain-Source Diode Forward Current	I_S	---	-	-	6	A
Maximum Pulsed Drain-Source Diode Forward Current	I_{SM}	---	-	-	24	A
Reverse Recovery Time	t_{rr}	$V_{GS}=0V, I_S=7A$	-	320	-	ns
Reverse Recovery Charge	Q_{rr}	$dI_F/dt=100A/\mu s$ (Note 2)	-	2.4	-	μC

TYPICAL CHARACTERISTICS

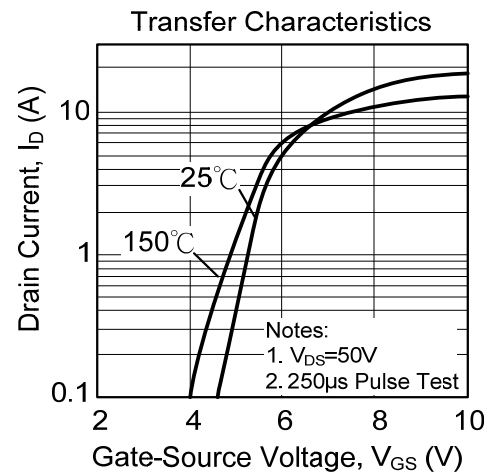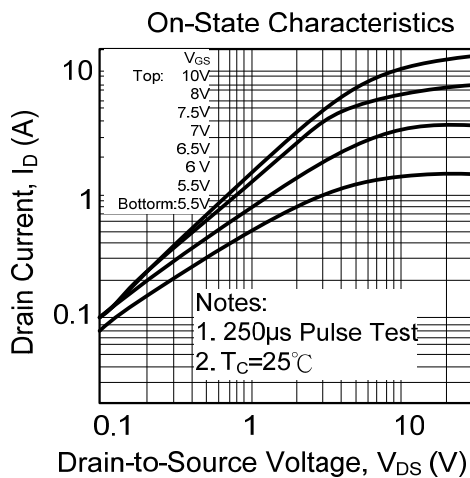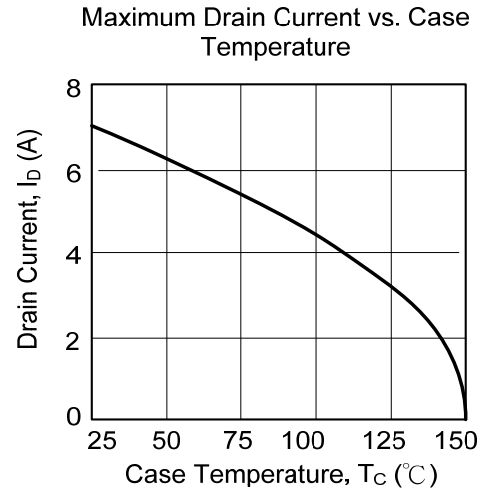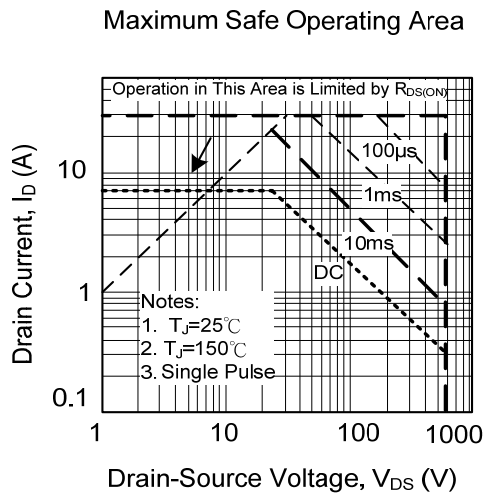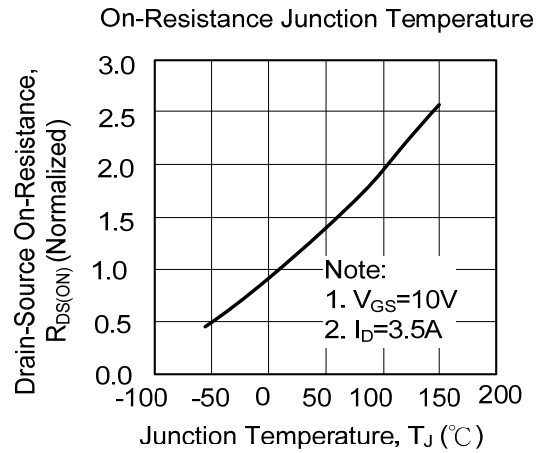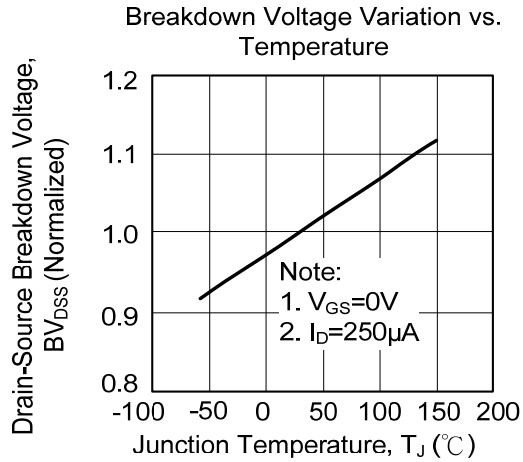


TYPICAL CHARACTERISTICS


Transient Thermal Response Curve

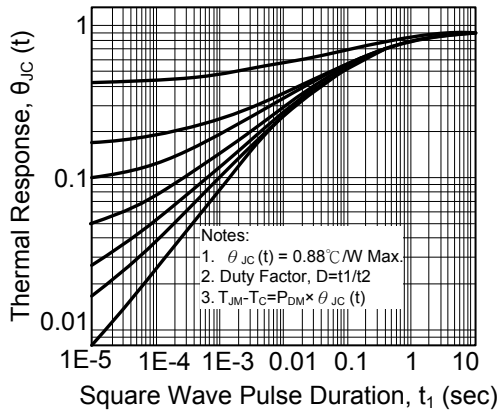


On State Current vs. Allowable Case Temperature

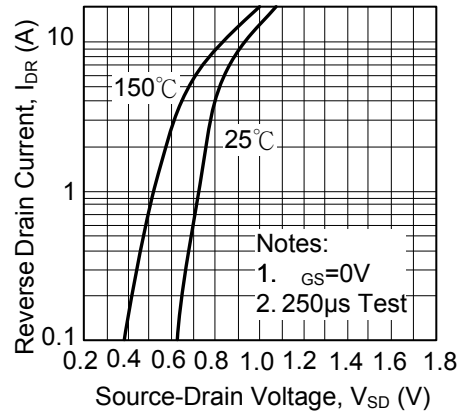


Capacitance Characteristics (Non-Repetitive)

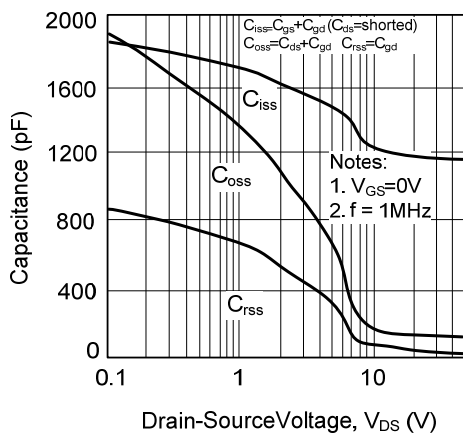


Gate Charge Characteristics

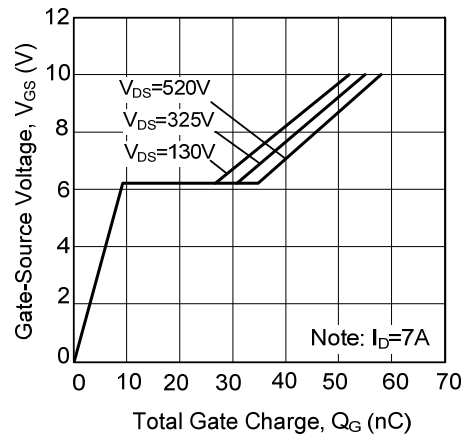


TO-220 Mechanical Drawing

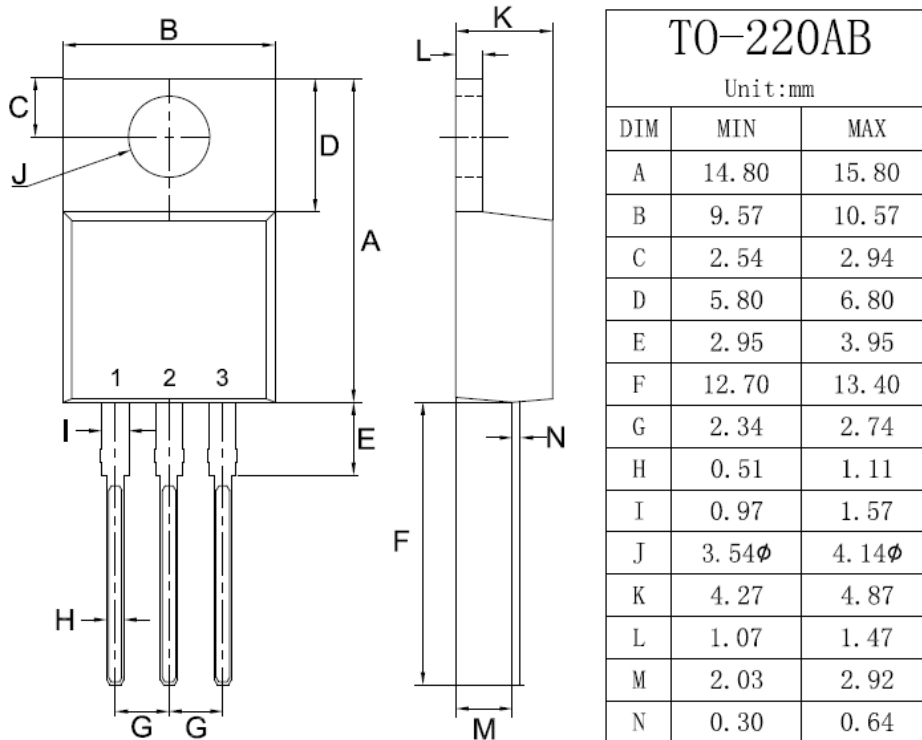


ITO-220 Mechanical Drawing

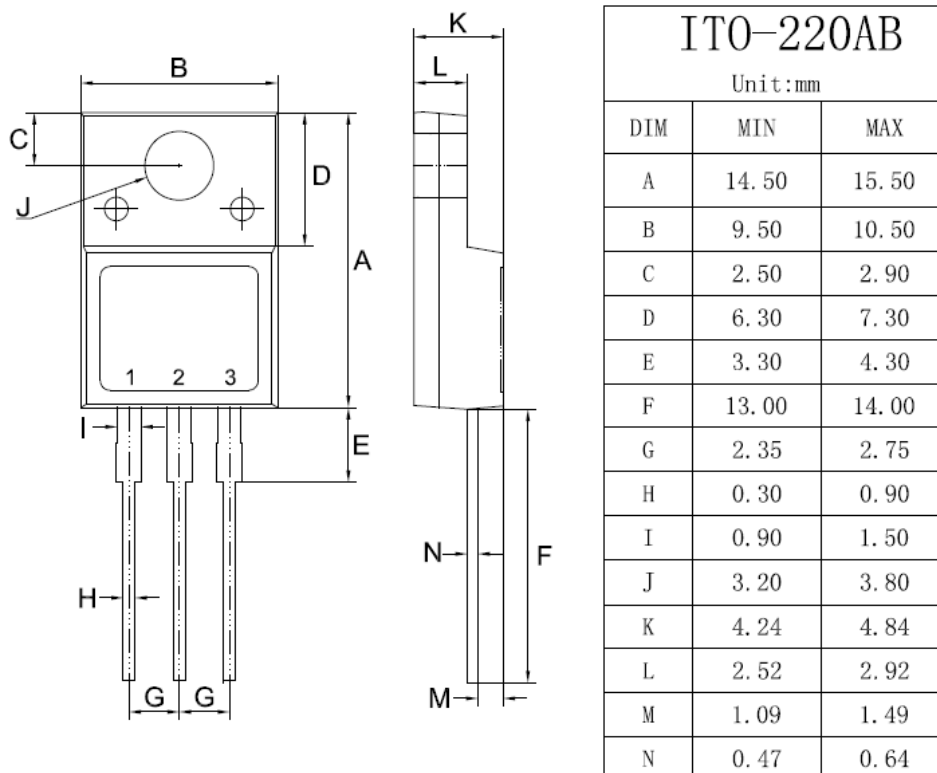

TO-262 Mechanical Drawing

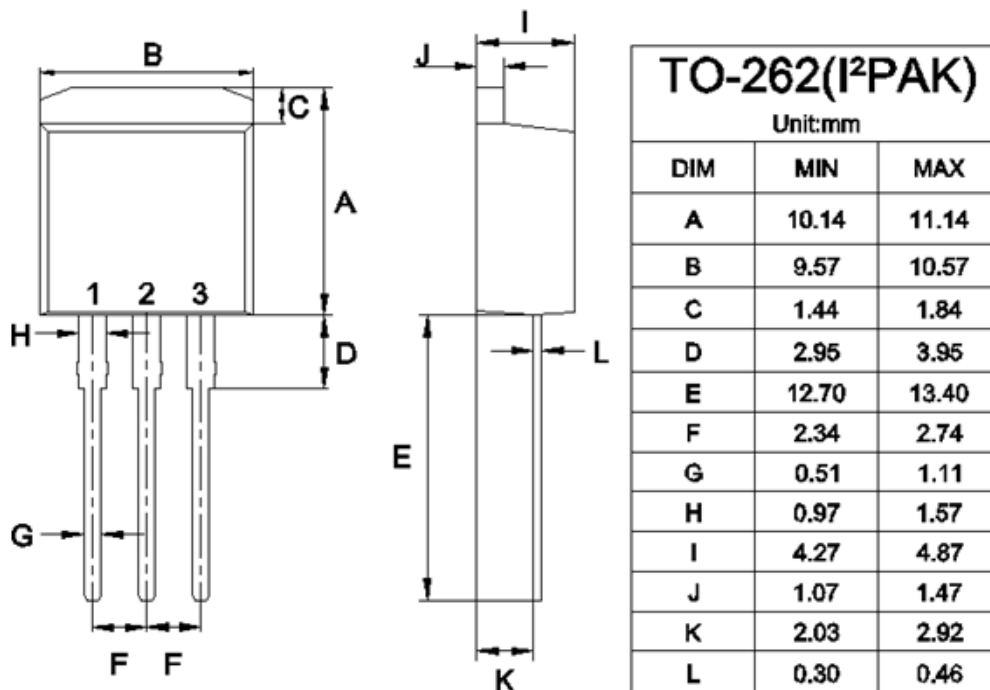

TO-263 Mechanical Drawing

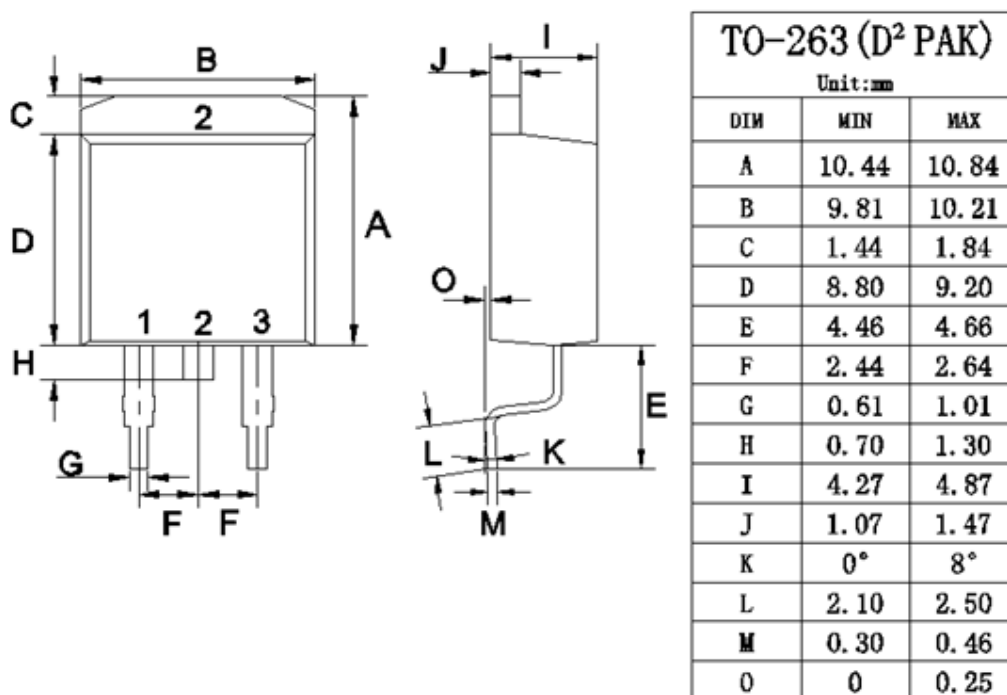

Notice

Specifications of the products displayed herein are subject to change without notice. DIYI or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, to any intellectual property rights is granted by this document. Except as provided in DIYI's terms and conditions of sale for such products, DIYI assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of DIYI products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify DIYI for any damages resulting from such improper use or sale.