
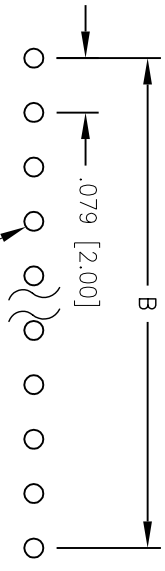
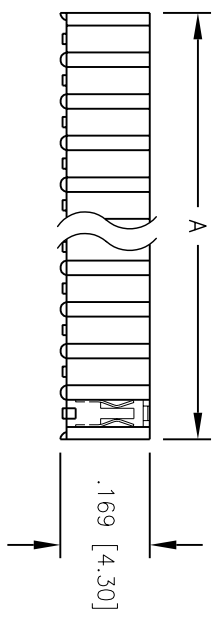
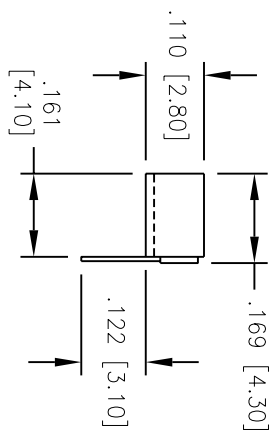


Rev	AWO #	Description	Date	Appr
-		RELEASED	12/6/04	

APPROVED: _____
 DATE: _____ TITLE: _____

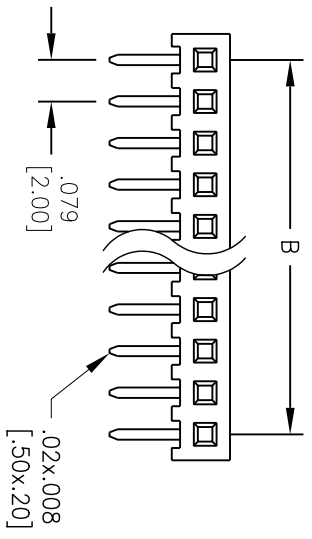

SPECIFICATIONS:
 Material: Insulator: PBT, glass reinforced, rated UL 94V-0
 Insulator color: Black
 Contacts: Phosphor Bronze

Plating:
 Gold Flash over Nickel underplate on mating area, Tin over Copper underplate on solder tails
Electrical:
 Operating voltage: 250 VAC max
 Current rating: 1 Amp max
 Contact resistance: 20 mohms max
 Insulation resistance: 5000 Mohms min @ 500 VDC
 Dielectric withstanding voltage: 1000 VAC for 1 minute
Temperature Rating:
 Operating temperature: -65°C to +125°C

A = .079 [2.00] X No. of Positions Per Row
 B = .079 [2.00] x No. of Spaces

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE
 .079 [2.0MM] RECEPTACLE STRIP,
 SINGLE ROW, RIGHT ANGLE

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES [MM]		TOLERANCES: EXCEPT AS NOTED	
HOLDS		HOLDS	
.X	± .10	ØX	± .10
.XX	± .020	ØXX	± .015
.XXX	± .015	ØXXX	± .010
APPROVALS	DATE	TITLE	
DRAWN	SS	.079 [2.0MM] RECEPTACLE STRIP, SINGLE ROW, RIGHT ANGLE	
CHECKED		SIZE	PART NO.
APPROVED		X	2RS1R-XX-SG
DATE		SCALE:	SHEET 1 OF 1
12/6/04		NTS	