

isc Silicon NPN Power Transistor

2SC3421

DESCRIPTION



- High Collector-Emitter Breakdown Voltage
: $V_{(BR)CEO} = 120V(\text{Min})$
- Complement to Type 2SA1358

APPLICATIONS

- Designed for audio frequency power amplifier applications.
- Suitable for driver of 60 to 80 Watts audio amplifier.

ABSOLUTE MAXIMUM RATINGS($T_a=25^\circ\text{C}$)

SYMBOL	PARAMETER	VALUE	UNIT
V_{CBO}	Collector-Base Voltage	120	V
V_{CEO}	Collector-Emitter Voltage	120	V
V_{EBO}	Emitter-Base Voltage	5	V
I_C	Collector Current-Continuous	1	A
I_B	Base Current-Continuous	0.1	A
P_C	Collector Power Dissipation @ $T_C=25^\circ\text{C}$	10	W
	Collector Power Dissipation @ $T_a=25^\circ\text{C}$	1.5	
T_J	Junction Temperature	150	$^\circ\text{C}$
T_{stg}	Storage Temperature Range	-55~150	$^\circ\text{C}$

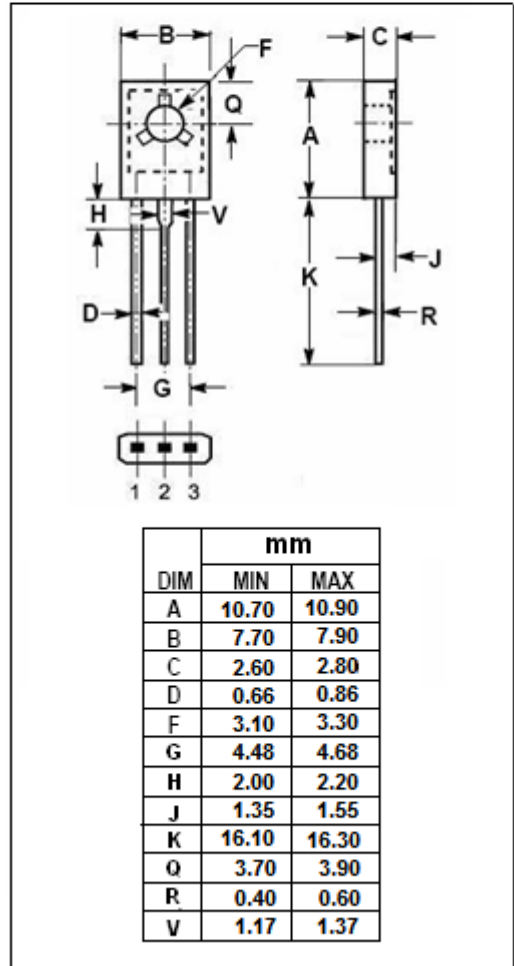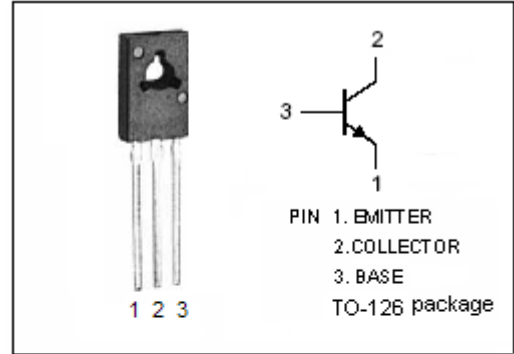

isc Silicon NPN Power Transistor**2SC3421****ELECTRICAL CHARACTERISTICS** $T_C=25^\circ\text{C}$ unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
$V_{(BR)CEO}$	Collector-Emitter Breakdown Voltage	$I_C=10\text{mA}; I_B=0$	120			V
$V_{(BR)EBO}$	Emitter-Base Breakdown Voltage	$I_E=1\text{mA}; I_C=0$	5			V
$V_{CE(sat)}$	Collector-Emitter Saturation Voltage	$I_C=500\text{mA}; I_B=50\text{mA}$			1.0	V
$V_{BE(on)}$	Base-Emitter On Voltage	$I_C=500\text{mA}; V_{CE}=5\text{V}$			1.0	V
I_{CBO}	Collector Cutoff Current	$V_{CB}=120\text{V}; I_E=0$			0.1	μA
I_{EBO}	Emitter Cutoff Current	$V_{EB}=5\text{V}; I_C=0$			0.1	μA
h_{FE}	DC Current Gain	$I_C=0.1\text{A}; V_{CE}=5\text{V}$	80		240	
f_T	Current-Gain—Bandwidth Product	$I_C=0.1\text{A}; V_{CE}=5\text{V}$		120		MHz
C_{OB}	Output Capacitance	$I_E=0; V_{CB}=10\text{V}, f_{test}=1\text{MHz}$		15		pF

◆ **h_{FE} Classifications**

O	Y
80-160	120-240