

Complementary MOSFET

ELM34603AA-N

■General Description

ELM34603AA-N uses advanced trench technology to provide excellent $R_{ds(on)}$ and low gate charge.

■Features

N-channel	P-channel
$V_{ds}=30V$	$V_{ds}=-30V$
$I_d=7A$	$I_d=-6A$
$R_{ds(on)} < 27.5m\Omega (V_{gs}=10V)$	$R_{ds(on)} < 34m\Omega (V_{gs}=-10V)$
$R_{ds(on)} < 40m\Omega (V_{gs}=4.5V)$	$R_{ds(on)} < 56m\Omega (V_{gs}=-4.5V)$

■Maximum Absolute Ratings


Parameter	Symbol	N-ch (Max.)	P-ch (Max.)	Unit	Note
Drain-source voltage	V_{ds}	30	-30	V	
Gate-source voltage	V_{gs}	± 20	± 20	V	
Continuous drain current	I_d	7	-6	A	
		6	-5		
Pulsed drain current	I_{dm}	20	-20	A	3
Power dissipation	P_d	2.0	2.0	W	
		1.3	1.3		
Junction and storage temperature range	T_j, T_{stg}	-55 to 150	-55 to 150	°C	

■Thermal Characteristics

Parameter	Symbol	Device	Typ.	Max.	Unit	Note
Maximum junction-to-ambient	$R_{\theta ja}$	N-ch		62.5	°C/W	
Maximum junction-to-ambient	$R_{\theta ja}$	P-ch		62.5	°C/W	


■Pin configuration

SOP-8(TOP VIEW)



Pin No.	Pin name
1	SOURCE1
2	GATE1
3	SOURCE2
4	GATE2
5	DRAIN2
6	DRAIN2
7	DRAIN1
8	DRAIN1

■Circuit

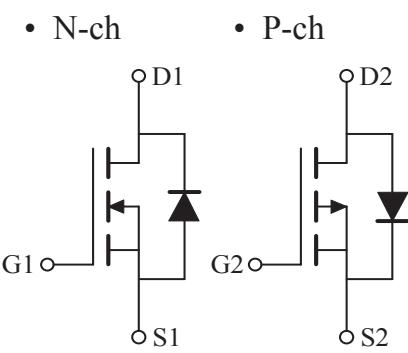

Complementary MOSFET

ELM34603AA-N

■Electrical Characteristics (N-ch)

$T_a=25^\circ C$

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit	Note
STATIC PARAMETERS							
Drain-source breakdown voltage	BV_{dss}	$I_d=250\mu A, V_{gs}=0V$	30			V	
Zero gate voltage drain current	Id_{ss}	$V_{ds}=24V, V_{gs}=0V$			1	μA	
		$V_{ds}=20V, V_{gs}=0V, T_j=55^\circ C$			10		
Gate-body leakage current	I_{gss}	$V_{ds}=0V, V_{gs}=\pm 20V$			± 100	nA	
Gate threshold voltage	$V_{gs(th)}$	$V_{ds}=V_{gs}, I_d=250\mu A$	1.0	1.5	2.5	V	
On state drain current	$I_d(on)$	$V_{gs}=10V, V_{ds}=5V$	20			A	1
Static drain-source on-resistance	$R_{ds(on)}$	$V_{gs}=10V, I_d=7A$		20.5	27.5	$m\Omega$	1
		$V_{gs}=4.5V, I_d=6A$		30.0	40.0		
Forward transconductance	G_{fs}	$V_{ds}=5V, I_d=7A$		16		S	1
Diode forward voltage	V_{sd}	$I_f=1A, V_{gs}=0V$			1	V	1
Max.body-diode continuous current	I_s				1.3	A	
Pulsed current	I_{sm}				2.6	A	3
DYNAMIC PARAMETERS							
Input capacitance	C_{iss}	$V_{gs}=0V, V_{ds}=15V, f=1MHz$		680		pF	
Output capacitance	C_{oss}			105		pF	
Reverse transfer capacitance	C_{rss}			75		pF	
SWITCHING PARAMETERS							
Total gate charge	Q_g	$V_{gs}=10V, V_{ds}=15V, I_d=7A$		14.0		nC	2
Gate-source charge	Q_{gs}			1.9		nC	2
Gate-drain charge	Q_{gd}			3.3		nC	2
Turn-on delay time	$t_{d(on)}$	$V_{gs}=10V, V_{ds}=10V, I_d \approx 1A$ $R_{gen}=3\Omega$		4.6	7.0	ns	2
Turn-on rise time	t_r			4.0	6.0	ns	2
Turn-off delay time	$t_{d(off)}$			20.0	30.0	ns	2
Turn-off fall time	t_f			5.0	8.0	ns	2

NOTE :







1. Pulse test : Pulsed width $\leq 300\mu sec$ and Duty cycle $\leq 2\%$.
2. Independent of operating temperature.
3. Pulsed width limited by maximum junction temperature.
4. Duty cycle $\leq 1\%$.



Complementary MOSFET





ELM34603AA-N

■ Typical Electrical and Thermal Characteristics (N-ch)

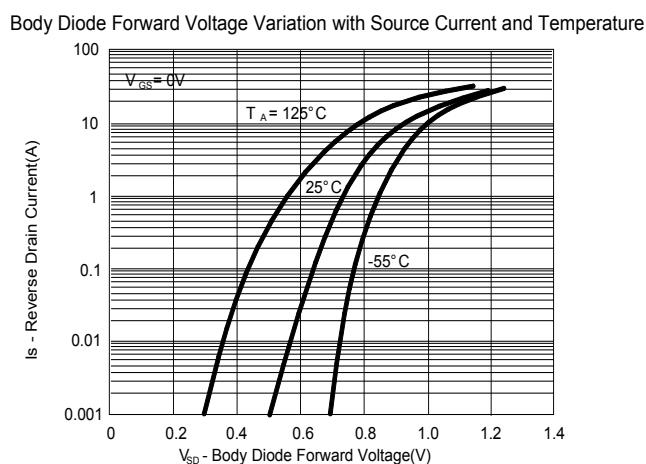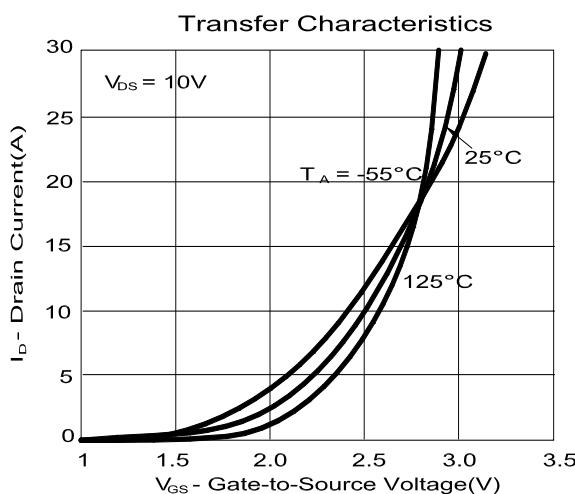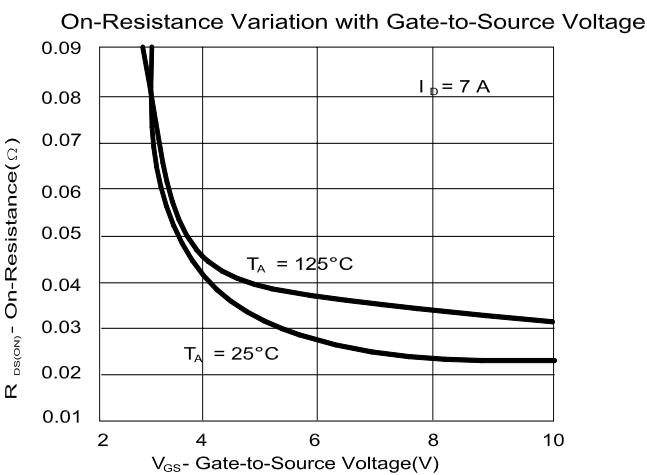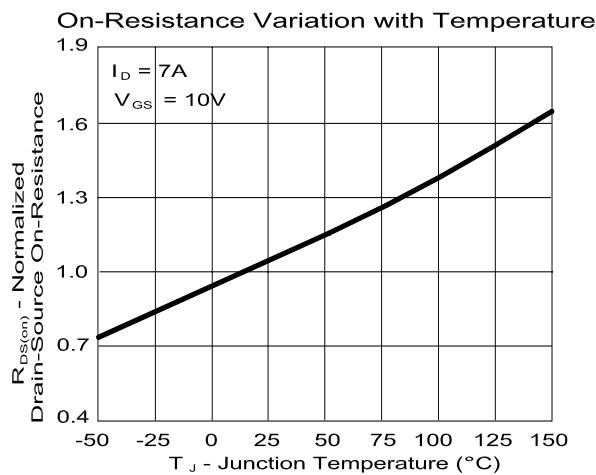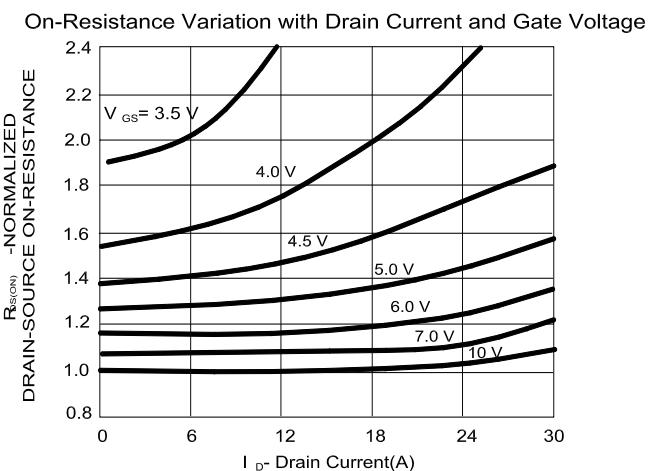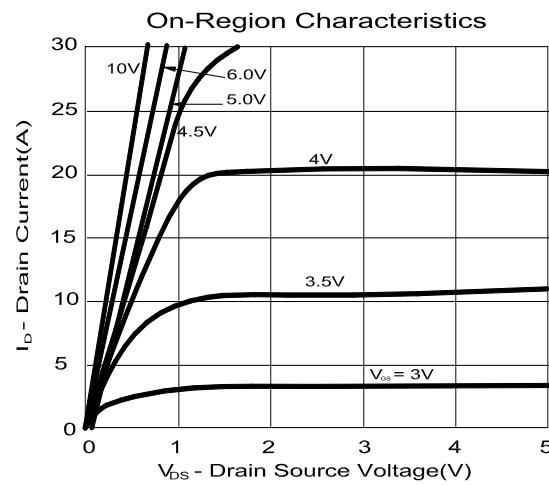

Complementary MOSFET

ELM34603AA-N

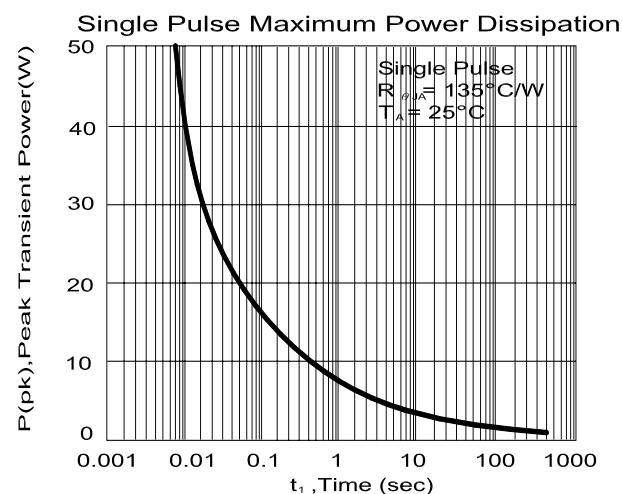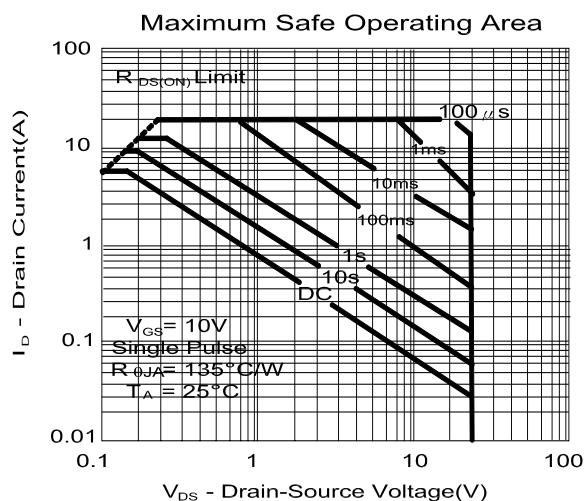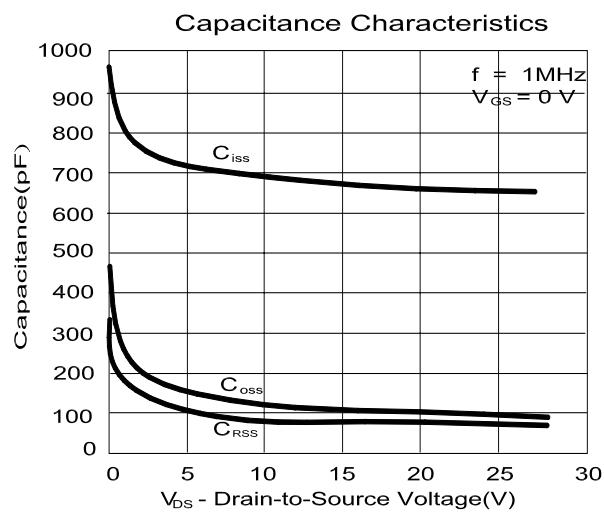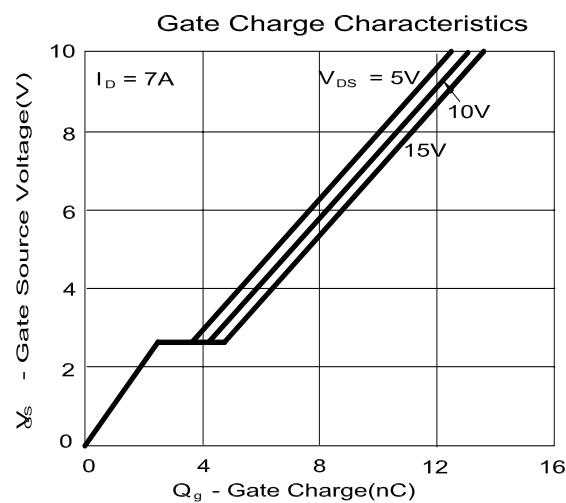

Complementary MOSFET

ELM34603AA-N

■Electrical Characteristics (P-ch)

$T_a=25^\circ C$

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit	Note
STATIC PARAMETERS							
Drain-source breakdown voltage	BV_{dss}	$I_d=-250\mu A, V_{gs}=0V$	-30			V	
Zero gate voltage drain current	Id_{ss}	$V_{ds}=-24V, V_{gs}=0V$			-1	μA	
		$V_{ds}=-20V, V_{gs}=0V, T_j=55^\circ C$			-10		
Gate-body leakage current	I_{gss}	$V_{ds}=0V, V_{gs}=\pm 20V$			± 100	nA	
Gate threshold voltage	$V_{gs(th)}$	$V_{ds}=V_{gs}, I_d=-250\mu A$	-1.0	-1.5	-2.5	V	
On state drain current	$I_{d(on)}$	$V_{gs}=-10V, V_{ds}=-5V$	-20			A	1
Static drain-source on-resistance	$R_{ds(on)}$	$V_{gs}=-10V, I_d=-6A$		27.5	34.0	$m\Omega$	1
		$V_{gs}=-4.5V, I_d=-5A$		43.5	56.0		
Forward transconductance	G_{fs}	$V_{ds}=-5V, I_d=-6A$		13		S	1
Diode forward voltage	V_{sd}	$I_f=-1A, V_{gs}=0V$			-1	V	1
Max.body-diode continuous current	I_s				-1.3	A	
Pulsed current	I_{sm}				-2.6	A	3
DYNAMIC PARAMETERS							
Input capacitance	C_{iss}	$V_{gs}=0V, V_{ds}=-15V, f=1MHz$		920		pF	
Output capacitance	C_{oss}			190		pF	
Reverse transfer capacitance	C_{rss}			120		pF	
SWITCHING PARAMETERS							
Total gate charge	Q_g	$V_{gs}=-10V, V_{ds}=-15V$ $I_d=-6A$		18.5		nC	2
Gate-source charge	Q_{gs}			2.7		nC	2
Gate-drain charge	Q_{gd}			4.5		nC	2
Turn-on delay time	$t_{d(on)}$	$V_{gs}=-10V, V_{ds}=-10V$ $I_d \approx -1A, R_{gen}=3\Omega$		7.7	11.5	ns	2
Turn-on rise time	t_r			5.7	8.5	ns	2
Turn-off delay time	$t_{d(off)}$			20.0	30.0	ns	2
Turn-off fall time	t_f			9.5	14.0	ns	2

NOTE :







1. Pulse test : Pulsed width $\leq 300\mu sec$ and Duty cycle $\leq 2\%$.
2. Independent of operating temperature.
3. Pulsed width limited by maximum junction temperature.



Complementary MOSFET

ELM34603AA-N

■ Typical Electrical and Thermal Characteristics (P-ch)

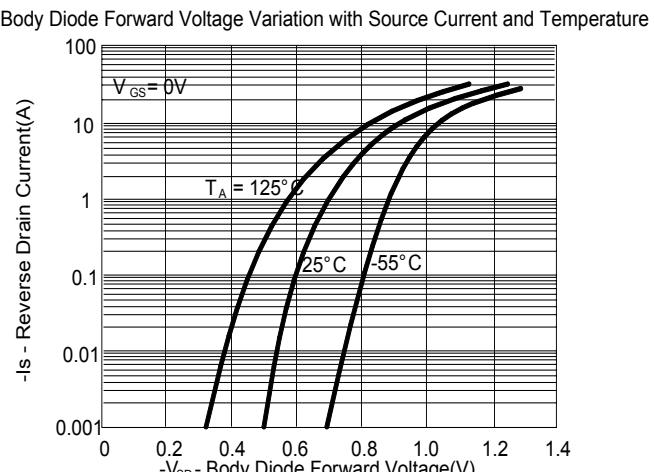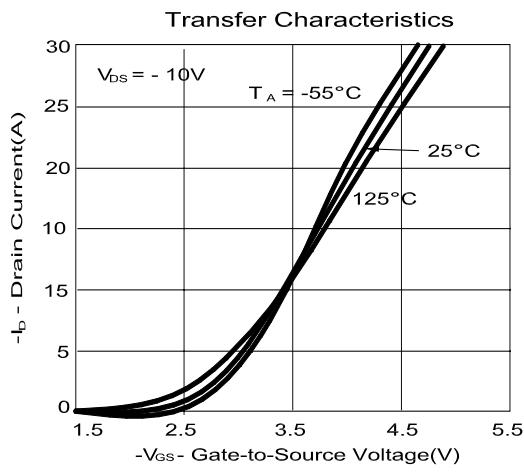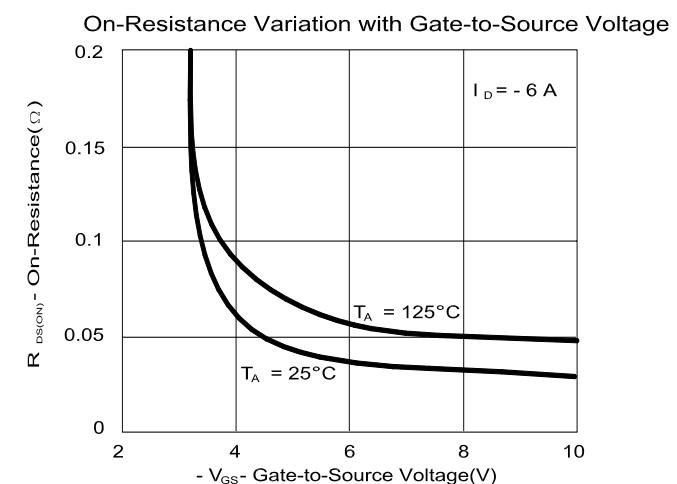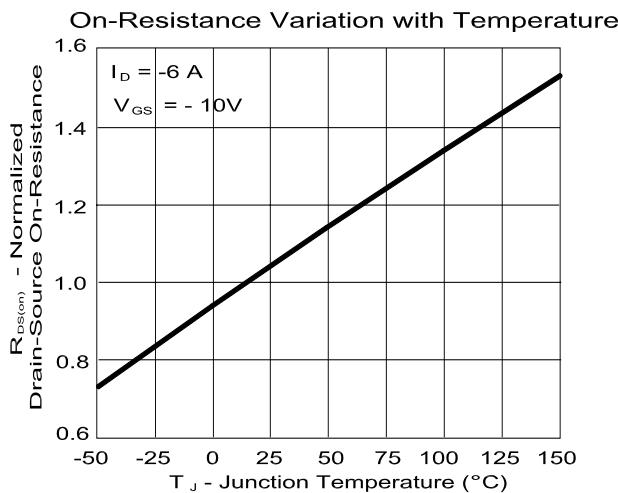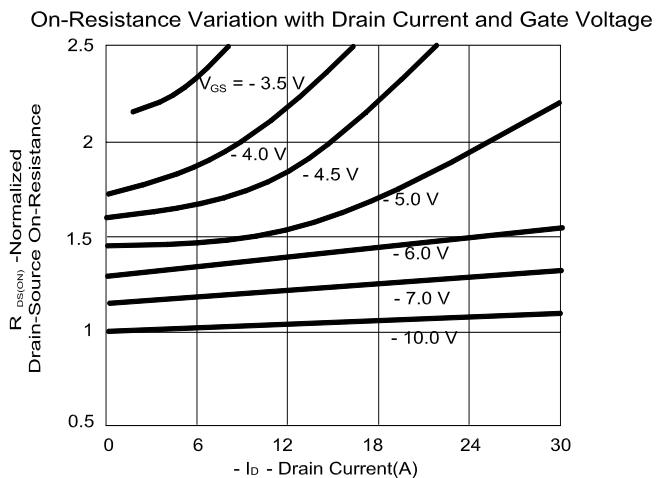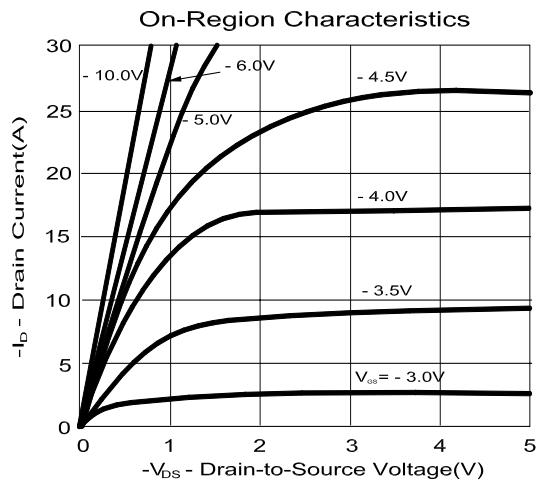

Complementary MOSFET

ELM34603AA-N

