




marlow industries, inc.®  
Subsidiary of II-VI INCORPORATED

# TECHNICAL DATA SHEET

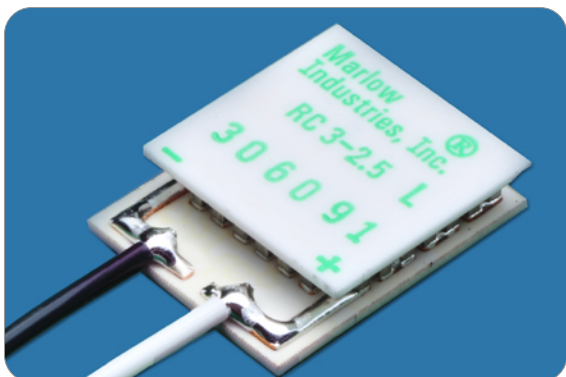



## RC3-2.5

Single-Stage Thermoelectric Module  
RoHS EU Compliant

### TYPICAL PERFORMANCE VALUES

Hot Side Temperature (°C)	27°C	50°C
Δ Tmax (°C-dry N <sub>2</sub> ):	65	73
Qmax (watts):	6	6
I <sub>max</sub> (amps):	2.5	2.5
V <sub>max</sub> (vdc):	3.6	4.1
AC Resistance (ohms):	1.2	---
Device ZT	0.76	--

### MECHANICAL CHARACTERISTICS

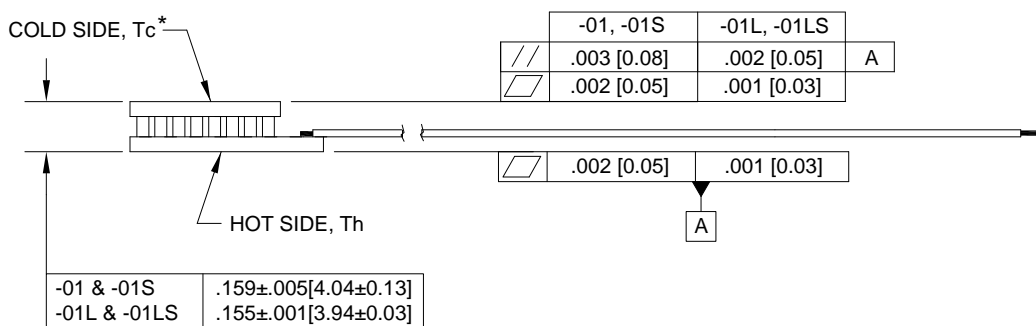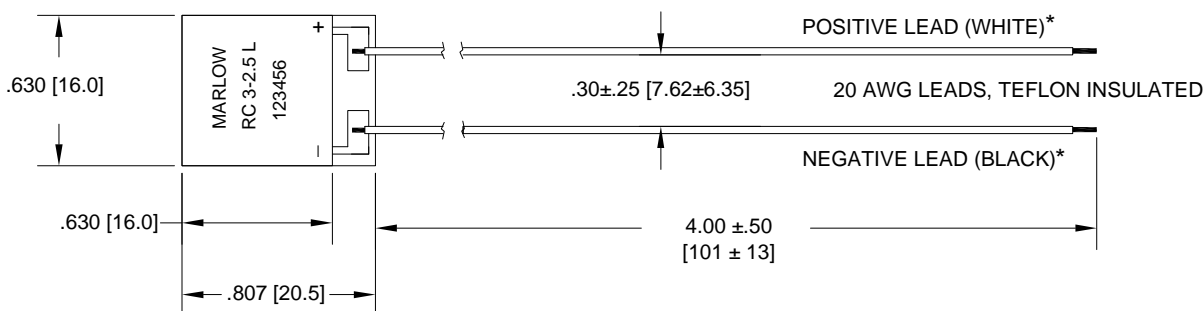

Ceramic Material: Alumina (Al<sub>2</sub>O<sub>3</sub>)

Dimensions in [ ] are millimeters

**\*NOTE: Cold side and positive and negative leads are valid only for thermoelectric cooling. For power generation, refer to page 3.**


### ORDERING OPTIONS

Model Number	Description
RC3-2.5-01	Base Model w/ leads
RC3-2.5-01L	Lapped Model
RC3-2.5-01S	Sealed Model
RC3-2.5-01LS	Lapped and Sealed Model

### AVAILABLE MODIFICATIONS

Solid-state reliability.  
Built with high temperature solder with the ability to withstand higher assembly processing temperatures for short periods of time (<160°C).  
Superior nickel diffusion barriers on elements.  
High strength for rugged environment.  
Porched configuration for enhanced leadwire strength.  
RTV sealing available (Optional).  
Lapped option available for multiple module applications.

ENVIRONMENT: ONE ATMOSPHERE DRY NITROGEN

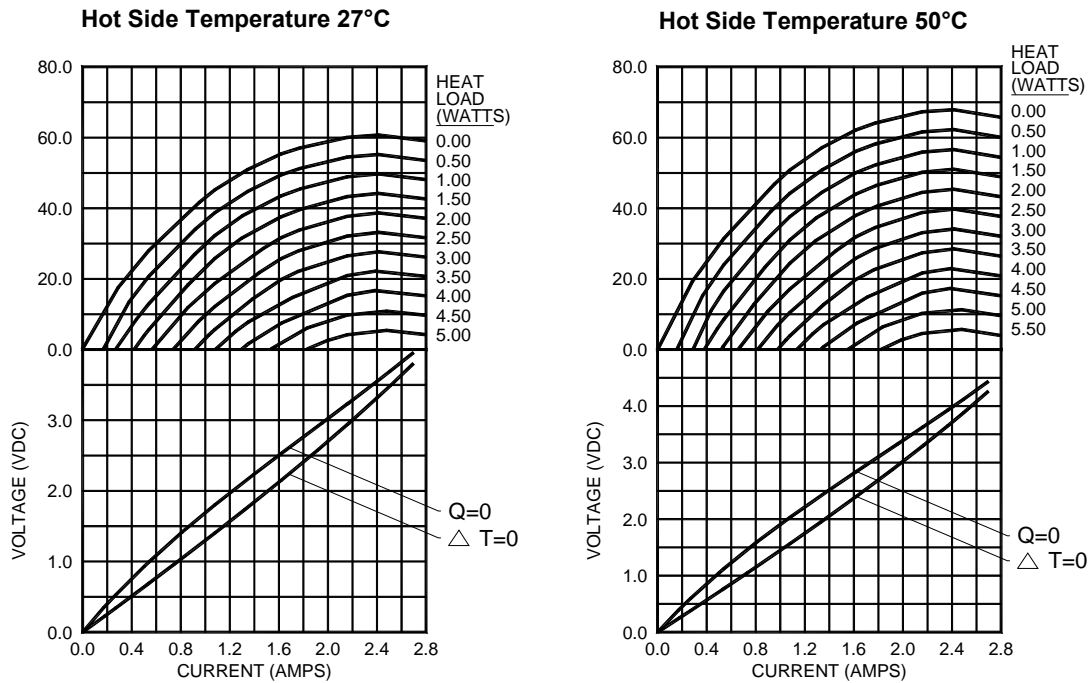

For performance information in a vacuum or with hot side temperatures other than 27°C or 50°C, consult one of our Applications Engineers.

**Installation**

Recommended mounting methods: Bonding with thermal epoxy or soldering with metallized ceramics. For additional information, please refer to our TEC Installation Guide.

**Operation Cautions**

For maximum reliability, storage and operation below 85°C in a non-condensing environment is recommended. To minimize thermal stress when operating in cooling mode, use linear/proportional temperature control or a similar method rather than an ON/OFF method.

**CONTACT US:**

For customer support or general questions please contact a local office below or consult our website for distributor information.

Marlow Industries, Inc.  
10451 Vista Park Road  
Dallas Texas 75238-1645  
214-340-4900 (tel)  
214-341-5212 (fax)  
www.marlow.com




Marlow Industries Europe GmbH  
Brunnenweg 19-21  
64331 Weiterstadt  
Germany  
Tel.: +49 (0) 6150 5439 - 403  
Fax: +49 (0) 6150 5439 - 400  
info@marlow-europe.eu

II-VI Japan Inc.  
WBG Marive East 17F  
2-6 Nakase, Mihama-ku  
Chiba-Shi, Chiba 261-7117  
Japan  
81 43 297 2693 (tel)  
81 43 297 3003 (fax)  
center@ii-vi.co.jp  
www.ii-vi.co.jp

II-VI Singapore Pte., Ltd.  
Blk. 5012, Techplace II  
#04-07 & 05-07/12, Ang Mo Kio Ave. 5  
Singapore 569876  
(65) 6481 8215 (tel)  
(65) 6481 8702 (fax)  
info@ii-vi.com.sg  
www.ii-vi.com.sg

Marlow Industries China, II-VI  
Technologies Beijing  
A subsidiary of II-VI Incorporated  
Rm 202, 1# Lize 2nd Middle Road  
Wangjing, Chaoyang District  
Beijing 100102 China  
010-64398226 ext 105 (tel)  
010-64399315 (fax)  
info@iivibj.com

**POWER GENERATION PERFORMANCE CURVES**

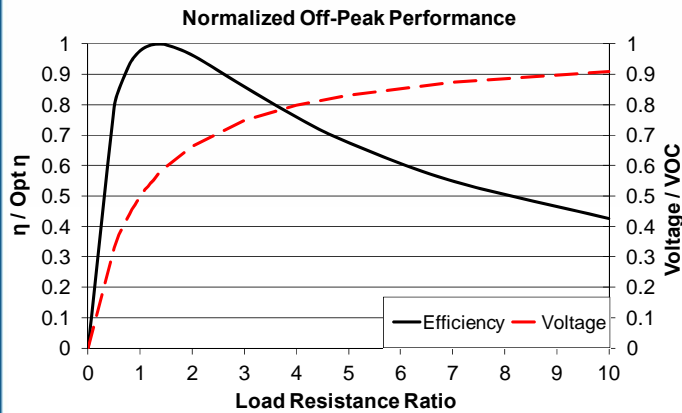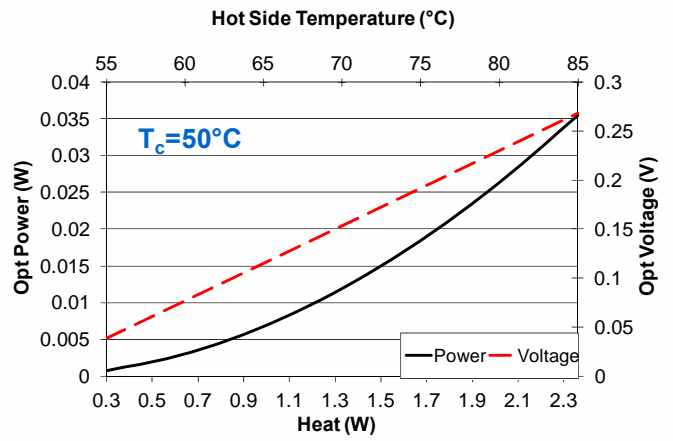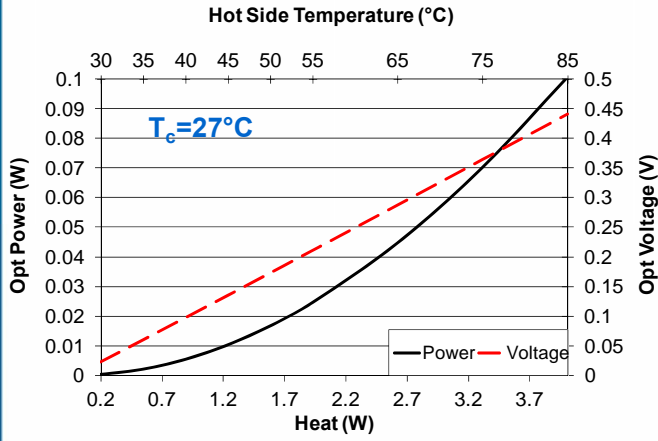

Hot Side Temperature (°C)	85	55	35
Cold Side Temperature (°C)	27	27	27
Optimum Efficiency, $\eta$ (%)	2.50	1.27	0.37
Optimum Power (W)	0.101	0.025	0.002
Optimum Voltage (V)	0.441	0.210	0.059
Load Resistance for Opt $\eta$ ( $\Omega$ )	1.93	1.80	1.72
Open Circuit Voltage, $V_{OC}$ (V)	0.77	0.37	0.10
Short Circuit Current (A)	0.53	0.27	0.08
Thermal Resistance (°C/W)	14.44	14.46	14.44

Power Generation performance information is given in a nitrogen environment and cold side temperatures of 27°C and 50°C. Module temperature does not include thermal resistance of heat sinks. For performance information in vacuum, other cold side temperatures, or specific heat sinks, consult one of our applications engineers.

**TYPICAL POWER GENERATION CONFIGURATION**

EXAMPLE:

