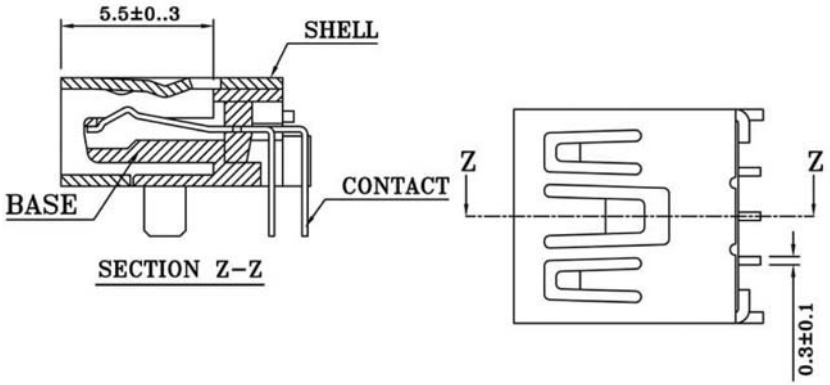

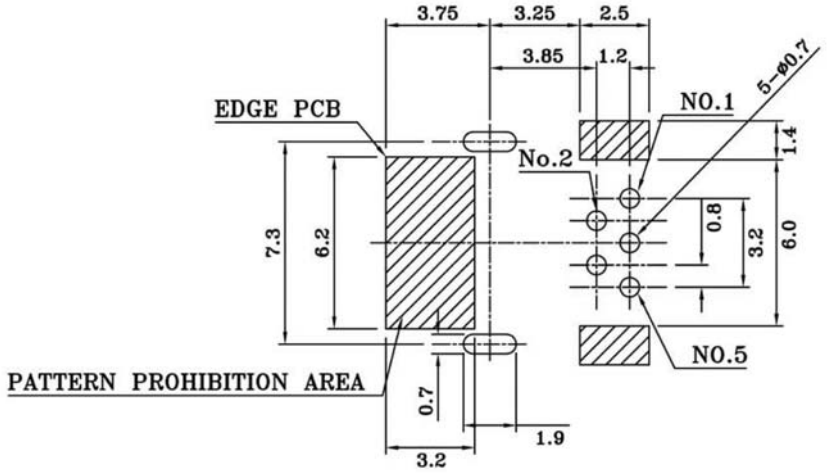

RECOMMENDED PCB PATTERN LAYOUT
(PCB THICKNESS:0.8±0.1)

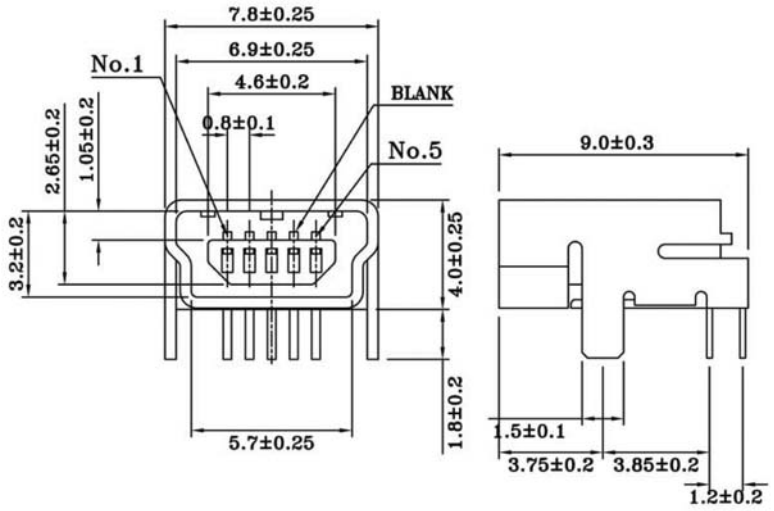

NOTES:

- Insulator: Nylon PA9T
- Contacts: Phosphorbronze
- Withstanding Voltage: 500V AC
- Insulation Resistance: 1000M min.
- Rated Voltage and Current: 1.5A

RoHS Complaint

Scale	1:1
TOLERANCE	
X.X	±0.40
X.XX	±0.25
X.XXX	±0.15
Angle	±3°

Modification	Date	Name

		Name
Drawn	10.19.11	Chappell
Approved		

ASSMANN WSW components

Item No.
A-USBB-M5-R (Version 1.1, 5µ")
A-USB/2-M5-R (Version 2.0, 30µ")

Title
USB, Version B-Mini, 5-Poles

Drawing No.

rev00

Replace

Sheet