
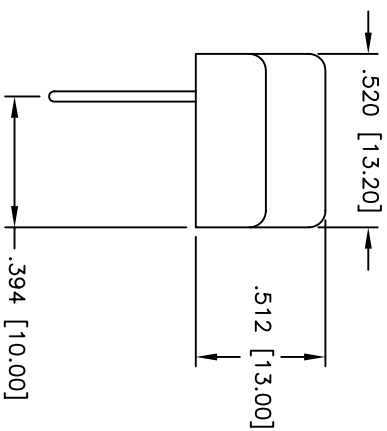
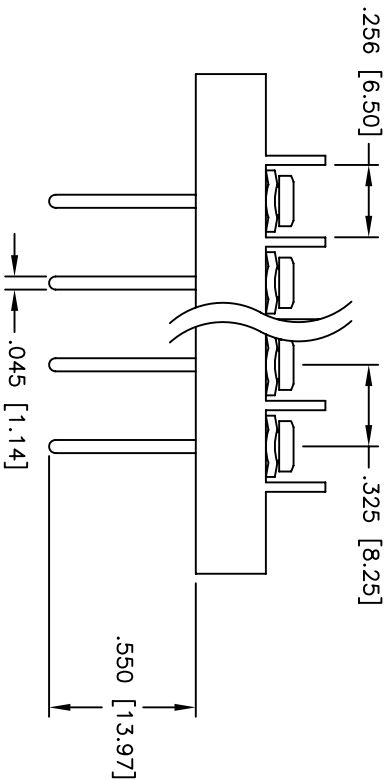


Rev	AWO #	Description	Date	Appr
-		RELEASED	6/7/05	

APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

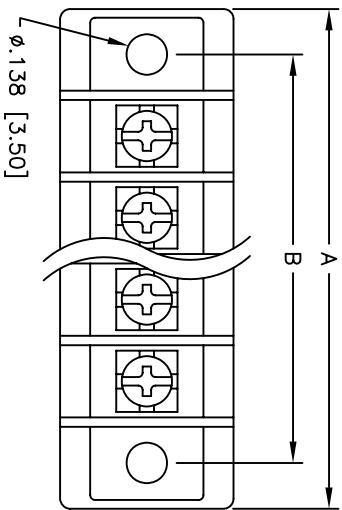

Positions: 2 thru 32  
 A =  $.325$  [8.25] x No. of Positions +  $.720$  [18.30]  
 B =  $.325$  [8.25] x No. of Spaces

**SPECIFICATIONS:**

- Material: Insulator: PBT, rated UL 94V-0
- Insulator color: Black
- Plating: Contacts: Brass, Tin plated
- Screws: Steel, Nickel plated
- Hardware: Brass, Tin plated
- Electrical: Operating voltage: 300 VAC max.
- Current rating: 15 Amps max.
- Contact resistance: 20 mohms max. initial
- Insulation resistance: 500 Mohms min.
- Dielectric withstanding voltage: 2,000 VAC for 1 minute
- Mechanical: Wire range: 22 - 14 AWG
- Operating temperature: -65°C to +125°C
- Environmental: Lead free, RoHS compliant



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLDS
X ± .10	ØX ± .10
.XX ± .020	ØXX ± .015
.XXX ± .015	ØXXX ± .010
APPROVALS	DATE
DRAWN	SS
CHECKED	
APPROVED	

**ADAM TECH**  
 909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: **.325 [8.25] CENTERLINE BARRIER BLOCK**  
 WIRE WRAP TAILS, MOUNT ENDS

SIZE	PART NO.	REV.
X	TBC-XX-06-M	
REF:	SCALE: NTS	SHEET 1 OF 1