



DETAIL Y

MATERIAL:
 • HOUSING-DSM STANYL TE250F6 (NYLON-46)
 HEAT DEFLECTION TEMP.290°
 BLACK COLOR, UL94V-0
 • CONTACTS-0.35mm THICK PHOS-BRONZE
 PLATED WITH HARD GOLD AND
 GOLD FLASH IN SOLDER AREA.
 • SHIELD-0.25mm THICK COPPER ALLOY,
 PLATED WITH NICKEL.
 CAVITY CONFIRMS TO FCC RULES AND REGULATIONS
 PART 68,SUBPART F.

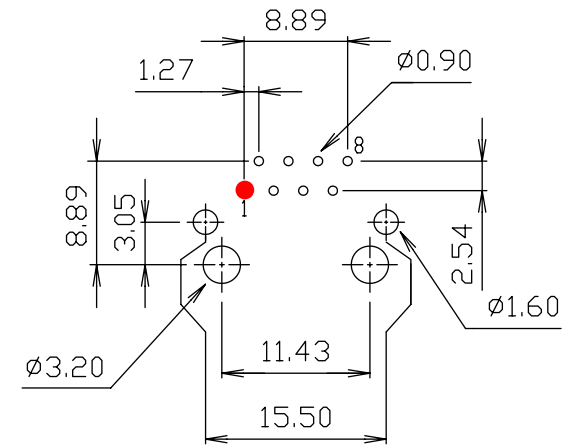

PCB LAYOUT
 Ref.



● = Pin 1

Ordering Information

AJT65B	8	8	1	X
Type	Positions	Contacts	Ports	Plating 1 = 6u" 3 = 30u"

Tolerance unless otherwise specified mm .0 ± 0.25 .00 ± 0.13 .000 ± 0.05

METZ CONNECT	P/N: AJT65B881X
Desc.: Side entry, shielded, thru hole modular jack	
Date: 9-09-09 Dimensions in mm	Drawn By: Donna Mears Verified By: Mike Balekdjian