

**Silicon PNP Power Transistor**

**2SB713**

**DESCRIPTION**



- Collector-Emitter Breakdown Voltage-  
 :  $V_{(BR)CEO} = -140V(\text{Min})$
- Good Linearity of  $h_{FE}$
- High Power Dissipation
- Complement to Type 2SD751

**APPLICATIONS**


- Designed for high power audio frequency amplifier use.

**ABSOLUTE MAXIMUM RATINGS( $T_a=25^\circ\text{C}$ )**

SYMBOL	PARAMETER	VALUE	UNIT
$V_{CBO}$	Collector-Base Voltage	-200	V
$V_{CEO}$	Collector-Emitter Voltage	-140	V
$V_{EBO}$	Emitter-Base Voltage	-5	V
$I_C$	Collector Current-Continuous	-9	A
$I_{CP}$	Collector Current-Pulse	-15	A
$P_C$	Collector Power Dissipation @ $T_C=25^\circ\text{C}$	100	W
$T_J$	Junction Temperature	150	$^\circ\text{C}$
$T_{stg}$	Storage Temperature Range	-55~150	$^\circ\text{C}$

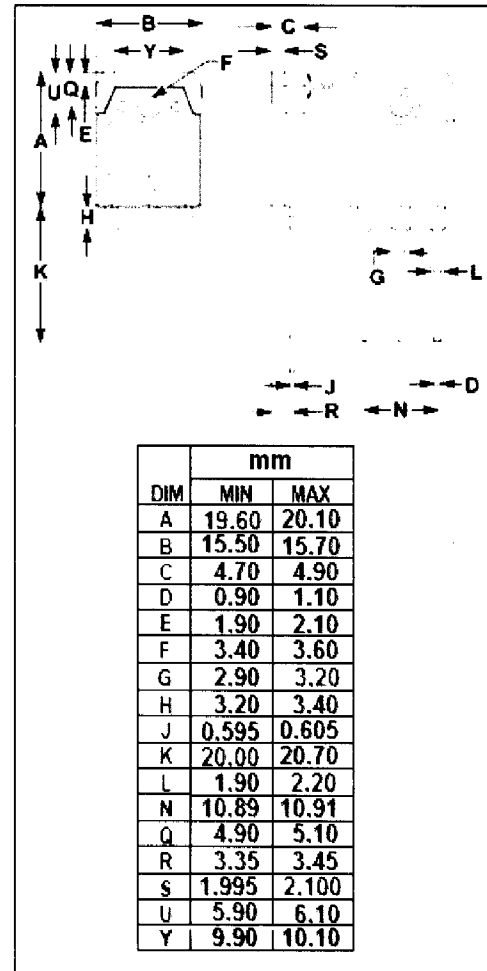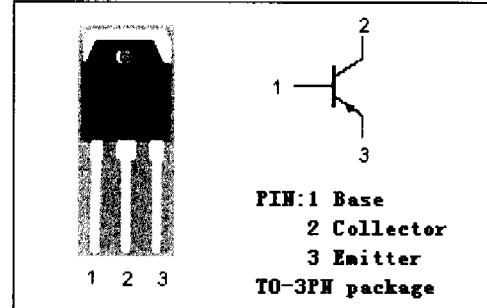

NJ Semi-Conductors reserves the right to change test conditions, parameter limits and package dimensions without notice. Information furnished by NJ Semi-Conductors is believed to be both accurate and reliable at the time of going to press. However, NJ Semi-Conductors assumes no responsibility for any errors or omissions discovered in its use. NJ Semi-Conductors encourages customers to verify that datasheets are current before placing orders.



# Silicon PNP Power Transistor

# 2SB713

## ELECTRICAL CHARACTERISTICS

$T_C=25^\circ\text{C}$  unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
$V_{CE(sat)}$	Collector-Emitter Saturation Voltage	$I_C = -5.0A; I_B = -0.7A$			-2.0	V
$V_{BE(on)}$	Base -Emitter On Voltage	$I_C = -7A; V_{CE} = -5V$			-1.8	V
$I_{CBO}$	Collector Cutoff Current	$V_{CB} = -140V; I_E = 0$			-50	$\mu A$
$I_{EBO}$	Emitter Cutoff Current	$V_{EB} = -3V; I_C = 0$			-50	$\mu A$
$h_{FE-1}$	DC Current Gain	$I_C = -20mA; V_{CE} = -5V$	20			
$h_{FE-2}$	DC Current Gain	$I_C = -1A; V_{CE} = -5V$	40		200	
$h_{FE-3}$	DC Current Gain	$I_C = -5A; V_{CE} = -5V$	15			
$f_T$	Current-Gain—Bandwidth Product	$I_C = -0.5A; V_{CE} = -5V$		20		MHz

### ◆ $h_{FE-2}$ Classifications

R	Q	P
40-80	60-120	100-200