


RoHS Compliant Product  
A suffix of "-C" specifies halogen & lead-free

### FEATURES

- Glass Passivated Chip
- High Surge Forward Current Capability

### APPLICATIONS

- General Purpose 1 Phase Bridge Rectifier Applications

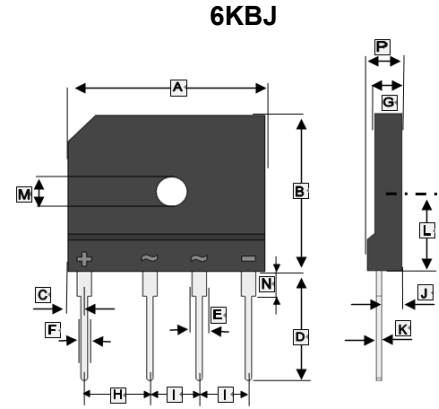


REF.	Millimeter		REF.	Millimeter	
	Min.	Max.		Min.	Max.
A	29.7	30.3	I	7.3	7.7
B	19.7	20.3	J	2.5	3.9
C	2.3	2.7	K	0.6	0.8
D	17	18	L	10.8	11.2
E	2.0	2.4	M	φ 3.3 TYP.	
F	0.9	1.1	N	3.8	4.2
G	3.4	3.8	P	4.4	4.8
H	9.8	10.2			

### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS (T<sub>A</sub>=25°C unless otherwise specified)


Parameter	Symbol	Part Number							Unit
		GBJ 35005	GBJ 3501	GBJ 3502	GBJ 3504	GBJ 3506	GBJ 3508	GBJ 3510	
Maximum Recurrent Peak Reverse Voltage	V <sub>RRM</sub>	50	100	200	400	600	800	1000	V
Average Rectified Output Current @ 60Hz sine wave, R-load	With Heatsink T <sub>C</sub> =130°C	35							A
	Without Heatsink T <sub>A</sub> =25°C	3.5							
Surge (Non-repetitive) Forward Current @60Hz sine wave, 1 cycle, T <sub>J</sub> =25°C	I <sub>FSM</sub>	320							A
Current Squared Time	I <sup>2</sup> t	424							A <sup>2</sup> S
Dielectric Strength @Terminals to case , AC 1 minute	V <sub>DIS</sub>	2.5							KV
Mounting Torque @Recommend torque : 5kg.cm	T <sub>or</sub>	8							Kg · cm
Peak Forward Voltage@ I <sub>FM</sub> =17.5A, Pulse measurement, Rating of per diode	V <sub>FM</sub>	1.1							V
Peak Reverse Current@ V <sub>RM</sub> =V <sub>RRM</sub> , Pulse measurement, Rating of per diode	I <sub>RPM</sub>	10							μA
Thermal Resistance	Without Heatsink	R <sub>θJA</sub> 22							°C/W
	With Heatsink	R <sub>θJC</sub> 0.8							
Junction and Storage Temperature Range	T <sub>J</sub> , T <sub>STG</sub>	-55~150							°C

**RATINGS AND CHARACTERISTIC CURVES**


**FIG1:  $I_o$ - $T_c$  Curve**

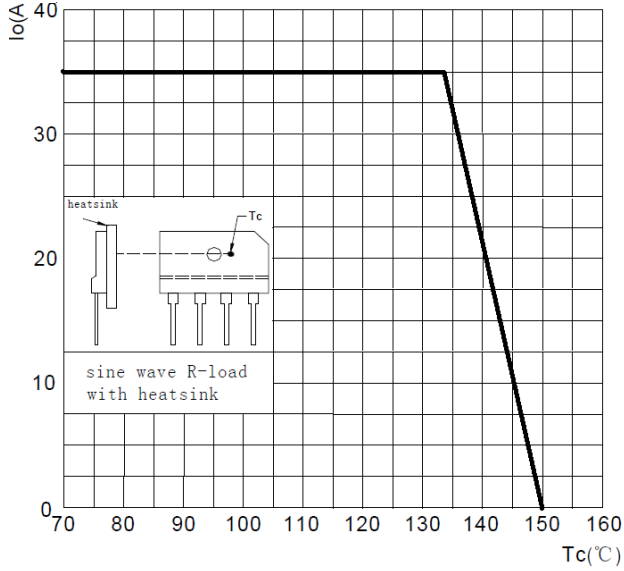

**FIG2: Surge Forward Current Capability**

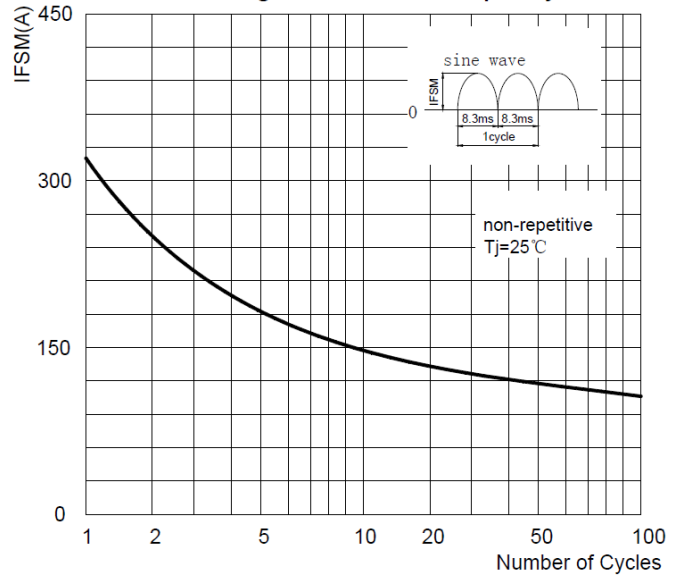

**FIG3: Forward Voltage**

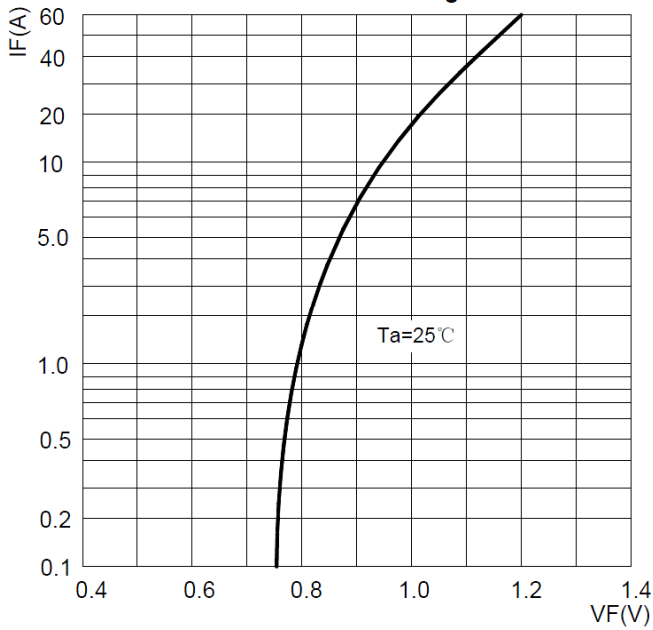

**FIG4: Typical Reverse Characteristics**

