
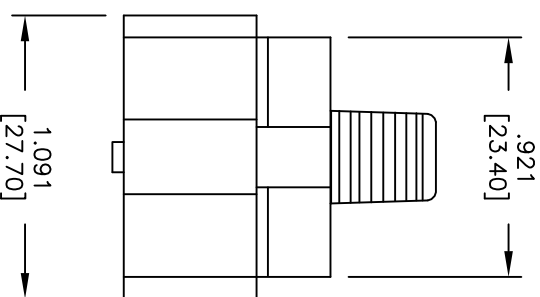
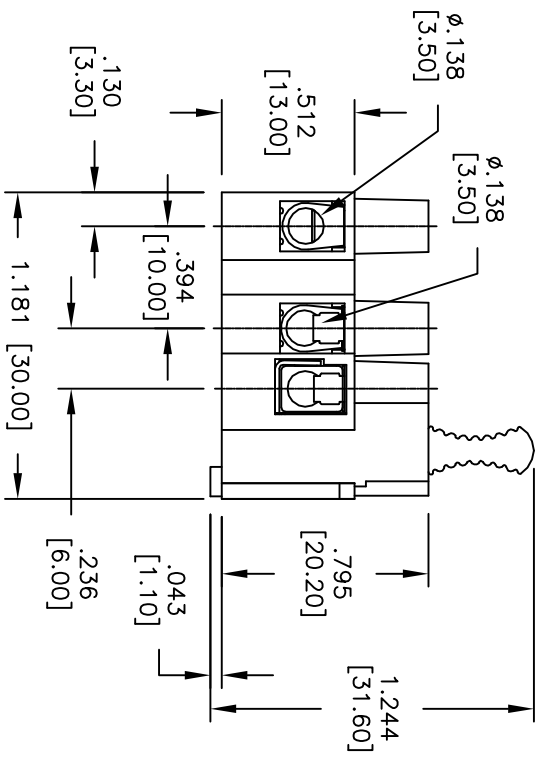


Rev	AWO #	Description	Date	Appr
-		RELEASED	4/30/10	

APPROVED: \_\_\_\_\_

DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

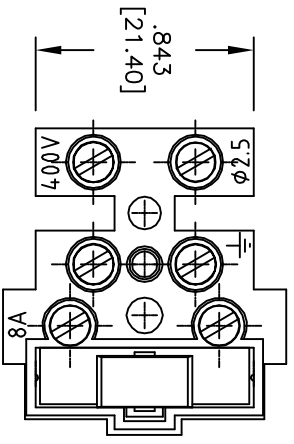

**SPECIFICATIONS:**

Material: Thermoplastic, rated UL 94V-0

Insulator: Brass, Tin plated

Terminal Screw: Steel zinc plating, "—" slot type

Wire guard: Stainless steel

Electrical:

Voltage rating: 400VAC

Current rating: 8A

Withstanding voltage: 1.8KV

Mechanical:

Screw: M3

Torque(Lb-In): 3.5

Stranded Wire: 14-22 Awg.

Environmental:

Operating temperature: -30°C to +105°C  
Lead free, RoHS compliant.  
Recommended soldering temp: 235°C for 5 sec.



UNLESS OTHERWISE SPECIFIED  
ALL DIMENSIONS ARE INCHES [MM]  
TOLERANCES: EXCEPT AS NOTED

INCHES	HOLES
.X ± .10	ØX ± .10
.XX ± .020	ØXX ± .015
.XXX ± .015	ØXXX ± .010

APPROVALS

DATE
4/30/10

DRAWN: DY  
CHECKED: \_\_\_\_\_  
APPROVED: \_\_\_\_\_

**ADAM TECH**  
909 Railway Avenue, Union, NJ 07083  
Phone: 908-687-5000 Fax: 908-687-5710

TITLE: **TERMINAL BLOCK, 3 POLES**

SIZE: X	PART NO.: EB113-03
REF: S00007T	SCALE: NTS