# **BLF3G22-30**

# UHF power LDMOS transistor Rev. 01 — 21 June 2007

**Product data sheet** 

# **Product profile**

#### 1.1 General description

30 W LDMOS power transistor for base station applications at frequencies from 2000 MHz to 2200 MHz

Table 1. **Typical class-AB RF performance** 

 $I_{Dq}$  = 450 mA;  $T_h$  = 25 °C in a common source test circuit.

Mode of operation	f <sub>1</sub>	f <sub>2</sub>	V <sub>DS</sub>	I <sub>Dq</sub>	P <sub>L(PEP)</sub>	P <sub>L(AV)</sub>	Gp	$\eta_{D}$	IMD	ACPR	IMD3
	(MHz)	(MHz)	(V)	(mA)	(W)	(W)	(dB)	(%)	(dBc)	(dBc)	(dBc)
2-tone	2170	2170.1	28	450	36	-	14	34	-24	-	-
2-carrier W-CDMA[1]	2115	2165	28	450	-	6	15	21	-	-42 <sup>[2]</sup>	-38

- [1] 3GPP test model 1; 64 channels with 66 % clippings
- [2] Measured within 10 kHz bandwidth

#### CAUTION



This device is sensitive to ElectroStatic Discharge (ESD). Therefore care should be taken during transport and handling.

#### 1.2 Features

- Excellent back off linearity
- Typical 2-carrier W-CDMA performance at a supply voltage of 28 V and I<sub>Dq</sub> of 450 mA:
  - ◆ Average output power = 6 W
  - ◆ Gain = 15 dB
  - ◆ Efficiency = 21 %
  - ◆ ACPR = -42 dBc (at 3.84 MHz)
  - ◆ IMD3 = -38 dBc
- Easy power control
- Excellent ruggedness
- High power gain
- Excellent thermal stability
- Designed for broadband operation (2000 MHz to 2200 MHz)
- Internally matched for ease of use
- ESD protection



# 1.3 Applications

- RF power amplifiers for W-CDMA base stations and multicarrier applications in the 2000 MHz to 2200 MHz frequency range
- Broadcast drivers

#### **Pinning information** 2.

Table 2. **Pinning** 

	3		
Pin	Description	Simplified outline	Symbol
1	drain		,
2	gate		
3	source		2 — 3 sym112

<sup>[1]</sup> Connected to flange

#### **Ordering information** 3.

**Ordering information** Table 3.

Type number	Package	Package				
	Name	Description	Version			
BLF3G22-30	-	flanged ceramic package; 2 mounting holes; 2 leads	SOT608A			

#### **Limiting values** 4.

**Limiting values** 

In accordance with the Absolute Maximum Rating System (IEC 60134).

Symbol	Parameter	Conditions	Min	Max	Unit
$V_{DS}$	drain-source voltage		-	65	V
$V_{GS}$	gate-source voltage		-	±15	V
$I_{D}$	drain current		-	12	Α
$T_{stg}$	storage temperature		-65	+150	°C
$T_j$	junction temperature		-	200	°C

# 5. Thermal characteristics

Table 5. Thermal characteristics

Symbol	Parameter	Conditions	Тур	Unit
R <sub>th(j-case)</sub>	thermal resistance from junction to case	T <sub>h</sub> = 25 °C	[ <u>1</u> ] 1.85	K/W

<sup>[1]</sup> Thermal resistance is determined under specified RF operating conditions

#### 6. Characteristics

Table 6. Characteristics

 $T_i = 25 \,^{\circ}C$  unless otherwise specified

•						
Symbol	Parameter	Conditions	Min	Тур	Max	Unit
$V_{(BR)DSS}$	drain-source breakdown voltage	$V_{GS} = 0 \text{ V}; I_D = 0.7 \text{ mA}$	65	-	-	V
$V_{GS(th)}$	gate-source threshold voltage	$V_{DS} = 10 \text{ V}; I_D = 70 \text{ mA}$	2.0	-	3.0	V
I <sub>DSS</sub>	drain leakage current	$V_{GS} = 0 \text{ V}; V_{DS} = 26 \text{ V}$	-	-	1.5	μΑ
I <sub>DSX</sub>	drain cut-off current	$V_{GS} = V_{GS(th)} + 9 V;$ $V_{DS} = 10 V$	9	-	-	A
I <sub>GSS</sub>	gate leakage current	$V_{GS} = \pm 15 \text{ V}; V_{DS} = 0 \text{ V}$	-	-	150	nΑ
9 <sub>fs</sub>	forward transconductance	$V_{DS} = 10 \text{ V}; I_{D} = 3.5 \text{ A}$	-	3	-	S
R <sub>DS(on)</sub>	drain-source on-state resistance	$V_{GS} = V_{GS(th)} + 6 V;$ $I_D = 2.5 A$	-	0.3	-	Ω
C <sub>rs</sub>	feedback capacitance	$V_{GS} = 0 \text{ V}; V_{DS} = 26 \text{ V};$ f = 1 MHz	-	1.7	-	pF

# 7. Application information

Table 7. Application information


Symbol	Parameter	Conditions	Min	Тур	Max	Unit
Mode of op	eration: Two-tone CW (100 kl	Hz tone spacing); f =	2170 MH	z; I <sub>Dq</sub> = 4	50 mA	
Gp	power gain	$P_{L(PEP)} = 30 \text{ W}$	-	14	-	dB
$RL_{in}$	input return loss	$P_{L(PEP)} = 30 \text{ W}$	-	<b>–15</b>	-	dB
$\eta_{D}$	drain efficiency	$P_{L(PEP)} = 30 \text{ W}$	-	33	-	%
IMD3	third order intermodulation distortion	$P_{L(PEP)} = 30 \text{ W}$	-	-24	-	dBc
		P <sub>L(PEP)</sub> < 6 W	-	< -50	-	dBc
	eration: Two-tone W-CDMA; 3 Hz; f <sub>2</sub> = 2165 MHz; I <sub>Dq</sub> = 450 n		- 64 DPC	H with 6	6 % cli <sub>l</sub>	oping;
Gp	power gain	$P_{L(AV)} = 6 W$	13	15	-	dB
RLin	input return loss	$P_{L(AV)} = 6 W$	-	-10	-8	dB
$\eta_{D}$	drain efficiency	$P_{L(AV)} = 6 W$	18	21	-	%
IMD3	third order intermodulation distortion	$P_{L(AV)} = 6 W$	-	-38	-35	dBc
ACPR	adjacent channel power ratio	$P_{L(AV)} = 6 W$	[1] -	-42	-38	dBc

<sup>[1]</sup> Measured within 10 kHz bandwidth.


#### 7.1 Ruggedness in class-AB operation


The BLF3G22-30 is capable of withstanding a load mismatch corresponding to VSWR = 10 : 1 through all phases under the following conditions:  $V_{DS}$  = 28 V;  $I_{Dq}$  = 450 mA;  $P_L$  = 30 W (CW); f = 2170 MHz.

#### 7.2 One-tone

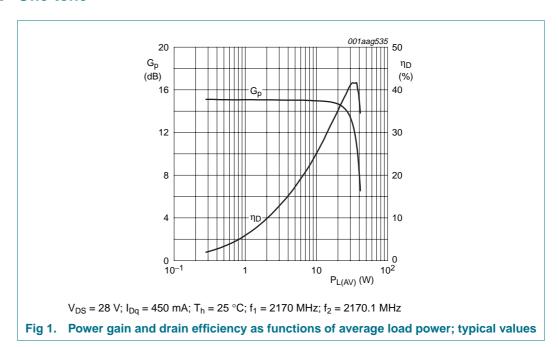


#### 7.3 Two-tone

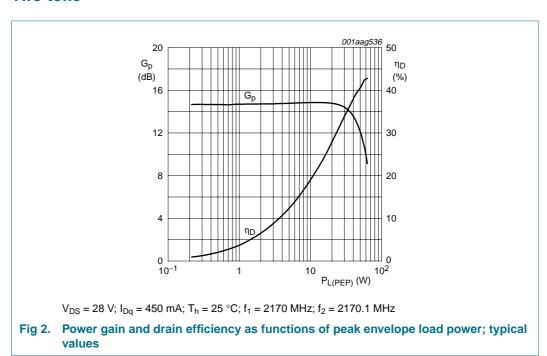

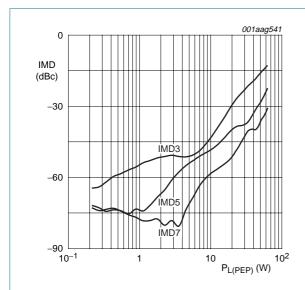

 $V_{DS}$  = 28 V;  $I_{Dq}$  = 450 mA;  $T_h$  = 25 °C;  $f_1$  = 2170 MHz;  $f_2$  = 2170.1 MHz

Fig 3. Intermodulation distortion as function of peak envelope load power; typical values

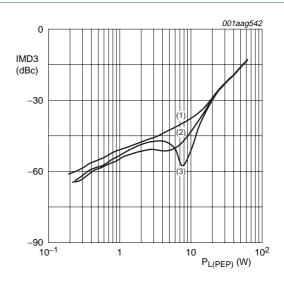


 $V_{DS}$  = 28 V;  $T_h$  = 25 °C;  $f_1$  = 2170 MHz;  $f_2 = 2170.1 \text{ MHz}$ 

- (1)  $I_{Dq} = 400 \text{ mA}$
- (2)  $I_{Dq} = 450 \text{ mA}$
- (3)  $I_{Dq} = 500 \text{ mA}$

Fig 4. IMD3 as function of peak envelope load power; typical values


#### 7.4 Two-carrier W-CDMA

Input signals: 3GPP W-CDMA, test model 1, 1-64 DPCH with 66 % clipping; peak-to-average power ratio: 8.5 dB at 0.01 % probability on CCDF; channel spacing = 10 MHz; bandwidth = 3.84 MHz.

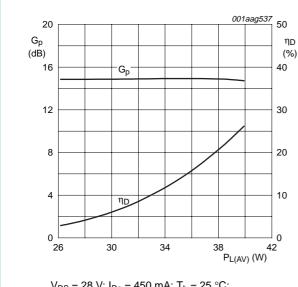

 $V_{DS} = 28 \text{ V}; I_{Dq} = 450 \text{ mA}; T_h = 25 ^{\circ}\text{C};$  $f_1 = 2115 \text{ MHz}; f_2 = 2165 \text{ MHz}$ 

Fig 5. Power gain and drain efficiency as functions of average load power; typical values

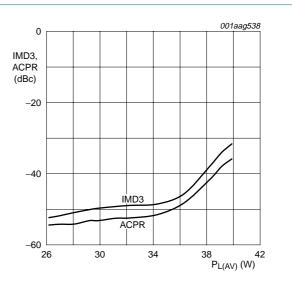

 $V_{DS} = 28 \text{ V}; I_{Dq} = 450 \text{ mA}; T_h = 25 °C; f_1 = 2115 \text{ MHz}; f_2 = 2165 \text{ MHz}$ 

Fig 6. IMD3 and ACPR as functions of average load power; typical values.

# 7.5 Input impedance and load impedances measured under CW conditions


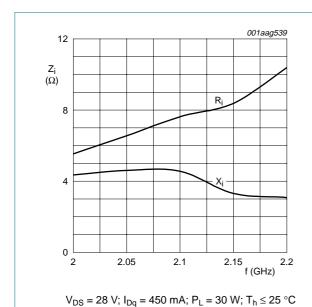



Fig 7. Input impedance as function of frequency (series components); typical values

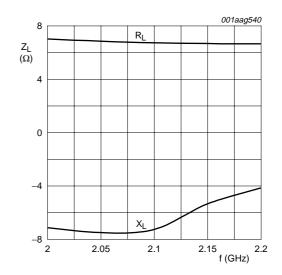



 $V_{DS}$  = 28 V;  $I_{Dq}$  = 450 mA;  $P_L$  = 30 W;  $T_h \leq$  25  $^{\circ}C$ 


Fig 8. Load impedance as function of frequency (series components); typical values


# 8. Test information

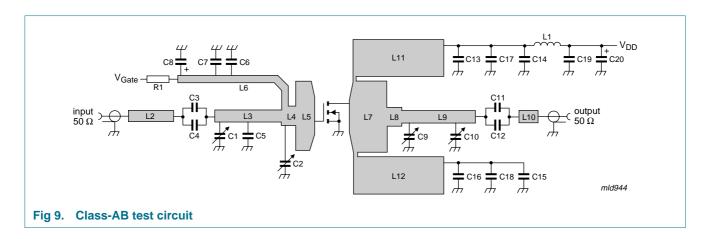

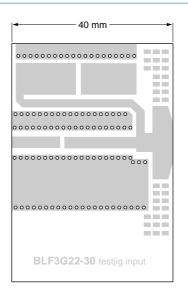

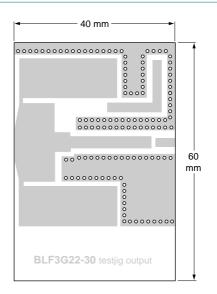

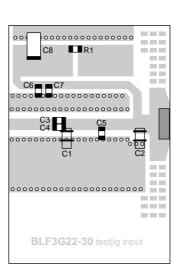

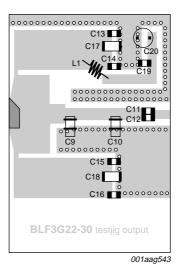

Dimensions in mm.

The components are situated on one side of the copper-clad Printed-Circuit Board (PCB) with Teflon dielectric ( $\epsilon_r$  = 2.2); thickness = 0.79 mm.

The other side is unetched and serves as a ground plane.

See Table 8 for list of components.

Fig 10. Component layout for 2.17 GHz class-AB test circuit

List of components (see Figure 9 and Figure 10) Table 8.

Component	Description		Value	Dimensions	Catalogue No.
C1, C2, C9, C10	Tekelec variable capacitor; type 37271		0.6 pF to 4.5 pF		
C3, C4, C11, C12	multilayer ceramic chip capacitor	[1]	6.8 pF		
C5	multilayer ceramic chip capacitor	[1]	2.2 pF		
C6, C7, C13, C14, C15, C16	multilayer ceramic chip capacitor	[1]	12 pF		
C8	tantalum capacitor		10 μF		
C17, C18	multilayer ceramic chip capacitor		1.5 μF		TDK C3225X7R1H155M
C19	multilayer ceramic chip capacitor	[2]	1 nF		
C20	electrolytic capacitor		100 μF; 63 V		
L1	handmade; enamelled 1 mm copper wire		-	2 loops; 4 mm in diameter	
L2	stripline	[3]	50 Ω	$12~\text{mm} \times 2.4~\text{mm}$	
L3	stripline	[3]	43 Ω	18 mm $\times$ 3 mm	
L4	stripline	[3]	29 Ω	$4~\text{mm} \times 5~\text{mm}$	
L5	stripline	[3]	10 Ω	$5~\text{mm}\times18.4~\text{mm}$	
L6	stripline	[3]	56 Ω	34.4 mm $\times$ 2 mm	
L7	stripline	[3]	9 Ω	$10~\text{mm}\times20~\text{mm}$	
L8	stripline	[3]	29 Ω	$4 \text{ mm} \times 5 \text{ mm}$	
L9	stripline	[3]	41 Ω	$20~\text{mm} \times 3.2~\text{mm}$	
L10	stripline	[3]	50 Ω	$5~\text{mm} \times 2.4~\text{mm}$	
L11, L12	stripline	[3]	17 Ω	24.5 mm $\times$ 10 mm	

<sup>[1]</sup> American Technical Ceramics type 100A or capacitor of same quality.

<sup>[2]</sup> American Technical Ceramics type 100B or capacitor of same quality.

<sup>[3]</sup> The striplines are on a double copper-clad Printed-Circuit Board (PCB) with Teflon dielectric ( $\epsilon_r$  = 2.2); thickness = 0.79 mm.

# **Package outline**

#### Flanged ceramic package; 2 mounting holes; 2 leads

SOT608A

02-02-11

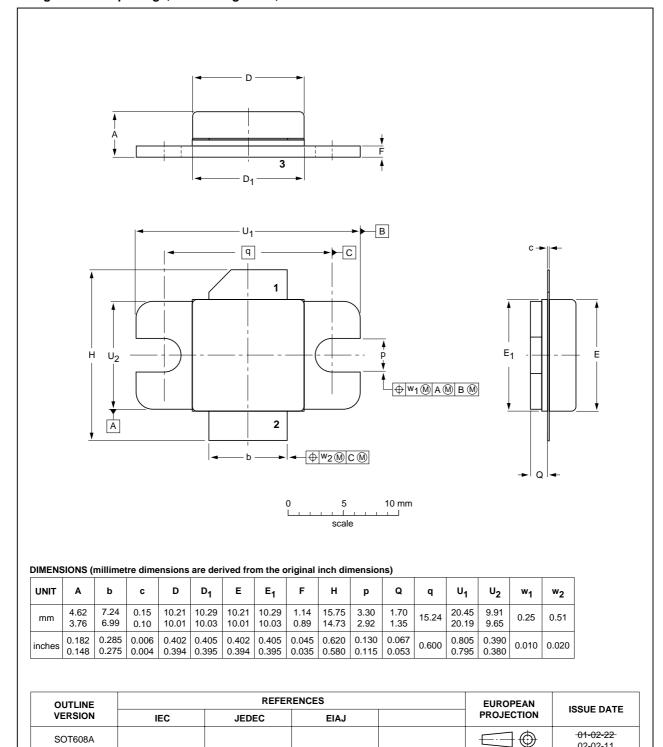


Fig 11. Package outline SOT608A

# 10. Abbreviations

Table 9. Abbreviations

Acronym	Description
3GPP	Third Generation Partnership Project
CCDF	Complementary Cumulative Distribution Function
CW	Continuous Wave
DPCH	Dedicated Physical CHannel
LDMOS	Laterally Diffused Metal Oxide Semiconductor
RF	Radio Frequency
UHF	Ultra High Frequency
VSWR	Voltage Standing Wave Ratio
W-CDMA	Wideband Code Division Multiple Access

# 11. Revision history

#### Table 10. Revision history

Document ID	Release date	Data sheet status	Change notice	Supersedes
BLF3G22-30_1	20070621	Product data sheet	-	-

# 12. Legal information

#### 12.1 Data sheet status

Document status[1][2]	Product status[3]	Definition
Objective [short] data sheet	Development	This document contains data from the objective specification for product development.
Preliminary [short] data sheet	Qualification	This document contains data from the preliminary specification.
Product [short] data sheet	Production	This document contains the product specification.

- [1] Please consult the most recently issued document before initiating or completing a design.
- [2] The term 'short data sheet' is explained in section "Definitions"
- [3] The product status of device(s) described in this document may have changed since this document was published and may differ in case of multiple devices. The latest product status information is available on the Internet at URL <a href="http://www.nxp.com">http://www.nxp.com</a>.

#### 12.2 Definitions

Draft — The document is a draft version only. The content is still under internal review and subject to formal approval, which may result in modifications or additions. NXP Semiconductors does not give any representations or warranties as to the accuracy or completeness of information included herein and shall have no liability for the consequences of use of such information.

Short data sheet — A short data sheet is an extract from a full data sheet with the same product type number(s) and title. A short data sheet is intended for quick reference only and should not be relied upon to contain detailed and full information. For detailed and full information see the relevant full data sheet, which is available on request via the local NXP Semiconductors sales office. In case of any inconsistency or conflict with the short data sheet, the full data sheet shall prevail.

#### 12.3 Disclaimers

**General** — Information in this document is believed to be accurate and reliable. However, NXP Semiconductors does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information.

Right to make changes — NXP Semiconductors reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.

**Suitability for use** — NXP Semiconductors products are not designed, authorized or warranted to be suitable for use in medical, military, aircraft, space or life support equipment, nor in applications where failure or

malfunction of a NXP Semiconductors product can reasonably be expected to result in personal injury, death or severe property or environmental damage. NXP Semiconductors accepts no liability for inclusion and/or use of NXP Semiconductors products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.

**Applications** — Applications that are described herein for any of these products are for illustrative purposes only. NXP Semiconductors makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

Limiting values — Stress above one or more limiting values (as defined in the Absolute Maximum Ratings System of IEC 60134) may cause permanent damage to the device. Limiting values are stress ratings only and operation of the device at these or any other conditions above those given in the Characteristics sections of this document is not implied. Exposure to limiting values for extended periods may affect device reliability.

Terms and conditions of sale — NXP Semiconductors products are sold subject to the general terms and conditions of commercial sale, as published at <a href="http://www.nxp.com/profile/terms">http://www.nxp.com/profile/terms</a>, including those pertaining to warranty, intellectual property rights infringement and limitation of liability, unless explicitly otherwise agreed to in writing by NXP Semiconductors. In case of any inconsistency or conflict between information in this document and such terms and conditions, the latter will prevail.

**No offer to sell or license** — Nothing in this document may be interpreted or construed as an offer to sell products that is open for acceptance or the grant, conveyance or implication of any license under any copyrights, patents or other industrial or intellectual property rights.

#### 12.4 Trademarks

Notice: All referenced brands, product names, service names and trademarks are the property of their respective owners.

#### 13. Contact information

For additional information, please visit: http://www.nxp.com

For sales office addresses, send an email to: <a href="mailto:salesaddresses@nxp.com">salesaddresses@nxp.com</a>

# **BLF3G22-30**

#### **UHF power LDMOS transistor**

# 14. Contents

1	Product profile
1.1	General description
1.2	Features
1.3	Applications 2
2	Pinning information 2
3	Ordering information 2
4	Limiting values 2
5	Thermal characteristics 3
6	Characteristics 3
7	Application information 3
7.1	Ruggedness in class-AB operation 4
7.2	One-tone 4
7.3	Two-tone 4
7.4	Two-carrier W-CDMA 6
7.5	Input impedance and load impedances
	measured under CW conditions 6
8	Test information
9	Package outline 10
10	Abbreviations11
11	Revision history
12	Legal information12
12.1	Data sheet status
12.2	Definitions
12.3	Disclaimers
12.4	Trademarks12
13	Contact information
14	Contents

Please be aware that important notices concerning this document and the product(s) described herein, have been included in section 'Legal information'.

