# DATA SHEET



# SILICON TRANSISTOR NE58219 / 2SC5004

# NPN SILICON EPITAXIAL TRANSISTOR 3 PINS ULTRA SUPER MINI MOLD

# DESCRIPTION

The NE58219 / 2SC5004 is a low supply voltage transistor designed for UHF OSC/MIX.

It is suitable for a high density surface mount assembly since the transistor has been applied ultra super mini mold package.

# FEATURES

- High fr : 5.0 GHz TYP. (@ VCE = 5 V, Ic = 5 mA, f = 1 GHz)
- Low  $C_{re}$ : 0.9 pF TYP. (@ VCB = 5 V, IE = 0, f = 1 MHz)
- Ultra Super Mini Mold Package. (1.6 mm × 0.8 mm)


# **ORDERING INFORMATION**

PART NUMBER	QUANTITY	PACKING STYLE
NE58219 2SC5004	50 pcs./unit	Embossed tape 8 mm wide. Pin 3 (Collector) face to
NE58219-T1 2SC5004-T1	3 kpcs./Reel	perforation side of the tape.

\* Please contact with responsible NEC person, if you require evaluation sample. Unit sample quantity shall be 50 pcs.

# ABSOLUTE MAXIMUM RATINGS (TA = 25 $^{\circ}$ C)

Collector to Base Voltage	Vсво	20	V
Collector to Emitter Voltage	VCEO	12	V
Emitter to Base Voltage	Vebo	3	V
Collector Current	Ic	60	mA
Total Power Dissipation	Рт	100	mW
Junction Temperature	Tj	125	°C
Storage Temperature	Tstg	-55 to +125	°C

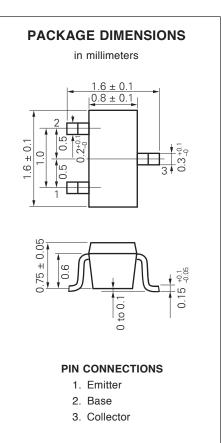

# ELECTRICAL CHARACTERISTICS (TA = 25 °C)

CHARACTERISTIC	SYMBOL	MIN.	TYP.	MAX.	UNIT	TEST CONDITION
Collector Cutoff Current	Ісво			0.1	μA	VCB = 15 V, IE = 0
Emitter Cutoff Current	Іево			0.1	μA	$V_{EB} = 1 V, I_{C} = 0$
Collector Saturation Voltage	VCE (sat)			0.5	V	hfe = 10, lc = 5 mA
DC Current Gain	hfe	60		120		$V_{CE} = 5 V$ , $I_C = 5 mA^{*1}$
Gain Bandwidth Product	fт	3.0	5.0		GHz	$V_{CE} = 5 V$ , $I_C = 5 mA$
Feed-back Capacitance	Cre		0.9	1.2	pF	$V_{CB} = 5 V$ , $I_E = 0$ , $f = 1 MHz$ *2
Insertion Power Gain	IS21el <sup>2</sup>	5.0			dB	$V_{CE} = 5 V$ , $I_C = 5 mA$ , $f = 1 GHz$


\*1 Pulse Measurement PW  $\leq$  350  $\mu$ s, Duty Cycle  $\leq$  2 %

\*2 The emitter terminal and the case shall be connected to the guard terminal of the three-terminal capacitance bridge.


#### hFE Classification


Rank	FB		
Marking	77		
hfe	60 to 120		


# TYPICAL CHARACTERISTICS (TA = 25 $^{\circ}$ C)

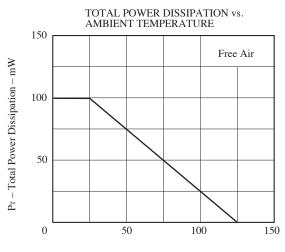


 $T_A$  – Ambient Temperature – °C

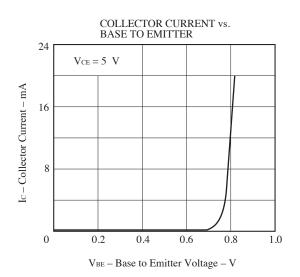


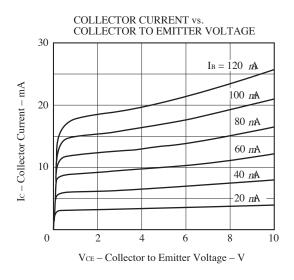


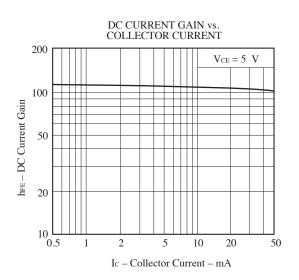


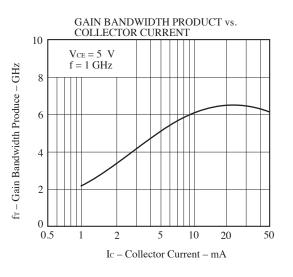



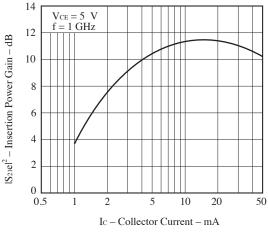

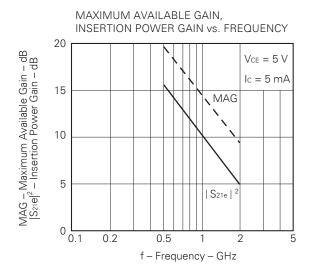

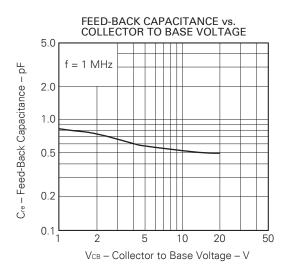

# S-PARAMETER

 $V_{\text{CE}}$  = 5 V, Ic = 1 mA, Zo = 50  $\Omega$ 

FREQUENCY		S11	S	21	Sı	2	S	22
MHz	MAG	ANG	MAG	ANG	MAG	ANG	MAG	ANG
MHZ 100.00 200.00 300.00 400.00 500.00 600.00 700.00 800.00 900.00 1000.00 1200.00 1200.00 1200.00 1400.00 1500.00 1600.00 1600.00 1700.00 2000.00 2000.00 2300.00 2400.00 2500.00 2600.00 2700.00 2800.00	MAG .992 .949 .912 .862 .821 .774 .732 .698 .667 .644 .614 .603 .593 .596 .593 .596 .592 .594 .599 .600 .608 .611 .620 .621 .630 .636 .636 .641 .648	ANG -15.7 -32.2 -47.8 -63.1 -77.5 -90.6 -103.0 -115.2 -126.1 -136.5 -145.4 -154.2 -161.6 -168.6 -175.4 172.6 167.6 162.0 157.2 152.4 148.5 144.2 136.9 132.9 130.0 126.5	MAG 1.958 2.005 2.034 1.954 1.939 1.780 1.733 1.665 1.607 1.549 1.475 1.415 1.340 1.287 1.218 1.174 1.129 1.083 1.043 1.855 .851 .825 .802 .777	ANG 161.4 144.3 129.7 116.5 104.7 92.7 82.1 71.5 62.3 53.0 44.7 36.4 28.8 21.5 14.2 7.6 .5 -5.8 -12.4 -18.4 -24.6 -30.4 -36.2 -41.8 -47.0 -52.6 -57.5 -62.8	MAG .036 .066 .093 .110 .125 .135 .141 .144 .146 .147 .146 .146 .146 .144 .144 .144 .142 .141 .141 .141 .141	ANG 76.2 62.4 50.4 40.2 30.8 22.4 15.5 9.1 4.4 8 -4.3 -8.3 -11.1 -13.7 -15.8 -17.1 -19.8 -20.3 -20.8 -21.2 -21.8 -23.1 -24.1 -28.3 -30.7	MAG .987 .956 .906 .864 .822 .786 .757 .728 .705 .685 .671 .656 .647 .637 .628 .621 .611 .611 .616 .597 .595 .588 .583 .577 .573 .566 .558 .558	ANG -7.1 -13.9 -19.4 -23.7 -27.7 -30.8 -33.7 -36.4 -38.7 -41.3 -46.2 -48.8 -51.8 -57.6 -60.8 -67.5 -71.1 -74.9 -78.9 -83.0 -91.6 -96.5 -101.4 -106.5
2900.00 3000.00	.652 .663	123.5 120.6	.752 .735	-67.6 -72.5	.229 .245	-33.7 -36.8	.552 .553	-111.6 -116.9

# $V_{\text{CE}}$ = 3 V, Ic = 5 mA, Zo = 50 $\Omega$

FREQUENCY		S11	S21		St	2	S22		
MHz	MAG	ANG	MAG	ANG	MAG	ANG	MAG	ANG	
100.00 200.00	.830 .705	-30.0 -61.3	8.873 8.192	149.7 127.6	.035 .056	67.5 51.3	.900 .738	-20.9 -34.1	
300.00	.615	-88.8	7.362	110.0	.071	42.2	.604	-41.4	
400.00	.548	-111.0	6.349	96.2	.078	37.2	.516	-44.4	
500.00	.508	-128.6	5.561	84.3	.086	33.3	.457	-47.2	
600.00	.483	-141.3	4.779	74.6	.093	30.4	.411	-48.4	
700.00	.471	-152.1	4.244	66.0	.100	28.4	.383	-49.6	
800.00	.462	-161.0	3.773	57.9	.107	25.7	.356	-51.0	
900.00	.460	-168.4	3.421	50.4	.115	23.6	.337	-52.1	
1000.00	.459	-175.2	3.114	43.4	.123	20.4	.319	-54.3	
1100.00	.461	179.2	2.875	36.9	.130	18.7	.305	-55.4	
1200.00	.464	173.5	2.664	30.1	.138	15.8	.296	-58.1	
1300.00	.468	168.8	2.469	23.7	.147	13.2	.283	-60.0	
1400.00	.475	164.3	2.325	17.3	.156	10.2	.275	-63.3	
1500.00	.479	160.0	2.175	11.3	.163	7.2	.263	-66.1	
1600.00	.487	156.1	2.076	5.1	.172	4.1	.255	-69.0	
1700.00	.491	152.0	1.957	-1.0	.180	.9	.247	-72.8	
1800.00	.500	148.8	1.869	-6.6	.190	-2.2	.238	-75.6	
1900.00	.507	145.2	1.783	-12.7	.198	-5.5	.232	-80.3	
2000.00	.516	141.9	1.703	-18.3	.207	-8.8	.225 .220	-84.2 -89.2	
2100.00	.525	138.7	1.642	-24.1 -29.6	.218	-12.4		-89.2 -94.2	
2200.00 2300.00	.532	136.1	1.569 1.522	-29.6 -35.3	.226 .237	-16.0 -19.6	.213 .208	-94.2 -98.8	
2400.00	.544 .548	132.8 130.2	1.459	-35.3 -40.8	.237	-23.4	.208	-90.0 -105.2	
2500.00	.548	127.8	1.459	-40.8 -46.0	.245	-26.8	.199	-110.7	
2600.00	.567	124.8	1.368	-51.6	.264	-31.2	.200	-117.4	
2700.00	.574	122.7	1.326	-56.7	.274	-34.7	.196	-124.1	
2800.00	.585	120.1	1.283	-62.2	.284	-38.8	.199	-130.9	
2900.00	.592	118.1	1.241	-67.1	.293	-42.6	.200	-137.8	
3000.00	.604	115.7	1.212	-72.3	.304	-46.7	.204	-143.7	

# S-PARAMETER

 $V_{\text{CE}}$  = 5 V, Ic = 5 mA, Zo = 50  $\Omega$ 

# $V_{\text{CE}}$ = 5 V, Ic = 3 mA, Zo = 50 $\Omega$

FREQUENCY	S11		S21		St	2	S22		
MHz	MAG	ANG	MAG	ANG	MAG	ANG	MAG	ANG	
100.00 200.00	.907 .825	-23.5 -45.3	5.717 5.461	154.7 135.7	.033 .056	70.9 56.2	.953 .855	-13.3 -23.5	
300.00	.747	-43.3	5.224	119.6	.074	45.2	.752	-30.1	
400.00	.673	-86.6	4.779	105.9	.083	36.9	.676	-33.8	
500.00	.615	-104.4	4.452	93.4	.092	31.0	.616	-36.9	
600.00	.569	-118.5	3.938	82.6	.097	26.2	.570	-38.7	
700.00	.535	-131.4	3.630	72.9	.102	22.8	.538	-40.2	
800.00	.511	-142.6	3.298	63.7	.106	19.5	.509	-41.9	
900.00	.497	-152.1	3.039	55.6	.112	17.1	.491	-43.3	
1000.00	.487	-160.2	2.798	47.7	.116	14.9	.471	-45.1	
1100.00	.483	-167.4	2.590	40.7	.121	12.5	.456	-46.5	
1200.00	.482	-174.5	2.420	33.4	.126	10.6	.444	-48.7	
1300.00	.481	179.7	2.250	26.8	.132	8.0	.433	-50.6	
1400.00	.485	174.3	2.133	20.2	.137	6.0	.424	-53.4	
1500.00	.486	168.9	2.001	13.8	.143	3.9	.412	-55.9	
1600.00	.494	164.3	1.906	7.5	.150	1.6	.405	-58.4	
1700.00	.497	159.7	1.805	1.0	.157	-1.0	.396	-61.1	
1800.00	.502	155.7	1.728	-4.6	.163	-3.1	.389	-63.9	
1900.00	.510	151.5	1.654	-11.0	.171	-5.8	.381	-67.3	
2000.00	.517	147.5	1.578	-16.7	.178	-8.2	.374	-70.6	
2100.00 2200.00	.525 .532	143.9 140.9	1.525 1.460	-22.6 -28.3	.188 .196	-10.9 -13.8	.368 .360	-74.0 -78.0	
2300.00	.532 .543	140.9	1.400	-28.3 -34.0	.206	-16.9	.355	-78.0 -81.7	
2400.00	.543	137.4	1.360	-34.0 -39.7	.200	-20.5	.347	-86.4	
2500.00	.558	131.7	1.320	-44.9	.224	-23.4	.341	-90.5	
2600.00	.566	128.2	1.276	-50.7	.235	-27.0	.338	-95.6	
2700.00	.573	126.1	1.236	-55.7	.244	-29.9	.332	-100.4	
2800.00	.585	123.1	1.199	-61.4	.256	-33.7	.328	-105.6	
2900.00	.590	120.7	1.158	-66.4	.263	-37.0	.325	-110.9	
3000.00	.603	118.2	1.132	-71.7	.278	-40.9	.325	-116.4	

# S-PARAMETER

 $V_{\text{CE}}$  = 3 V, Ic = 3 mA, Zo = 50  $\Omega$ 

FREQUENCY		S11	S21		S	2	S22		
MHz	MAG	ANG	MAG	ANG	MAG	ANG	MAG	ANG	
MHz 100.00 200.00 300.00 400.00 500.00 600.00 700.00 800.00 900.00 1000.00 1100.00 1200.00 1300.00 1400.00 1500.00 1600.00 1700.00 1800.00 1900.00	MAG .910 .815 .737 .664 .609 .569 .539 .521 .502 .498 .499 .505 .506 .515 .506 .515 .516 .522 .531	ANG -23.7 -48.0 -70.9 -91.2 -109.6 -123.6 -136.4 -147.1 -156.1 -164.3 -171.1 -164.3 -171.1 -164.3 -171.1 -177.7 176.7 171.4 166.5 162.0 157.3 153.7 149.5	MAG 5.615 5.419 5.156 4.674 4.337 3.814 3.496 3.165 2.913 2.676 2.473 2.310 2.152 2.032 1.906 1.817 1.725 1.646 1.577	ANG 154.6 134.2 117.7 103.8 91.1 80.2 70.6 61.6 53.5 45.6 38.6 31.4 24.6 18.0 11.6 5.2 -1.1 -7.1 -7.1 -13.4	MAG .038 .065 .084 .094 .102 .108 .113 .119 .124 .129 .134 .129 .134 .129 .134 .129 .134 .152 .157 .164 .170 .178 .186	ANG 70.8 53.8 42.7 34.8 28.8 24.3 20.9 17.4 15.1 12.0 10.1 7.3 5.4 2.8 .2 -1.8 -4.5 -6.8 -9.6	MAG .943 .832 .718 .635 .571 .520 .486 .455 .434 .414 .398 .386 .373 .363 .352 .345 .336 .328 .321	ANG -15.4 -27.0 -34.6 -38.8 -42.4 -44.4 -46.3 -48.2 -49.7 -52.0 -53.4 -52.0 -53.4 -56.1 -57.9 -61.1 -63.9 -66.8 -70.1 -73.1 -77.3	
200.00 2100.00 2200.00 2300.00 2400.00 2500.00 2600.00 2700.00 2800.00 2900.00 3000.00	.538 .547 .552 .563 .568 .580 .585 .593 .604 .609 .621	145.8 142.2 139.3 135.7 132.8 130.1 126.9 124.7 121.8 119.5 117.0	1.504 1.449 1.391 1.350 1.293 1.257 1.214 1.177 1.141 1.102 1.077	-10.4 -24.9 -30.6 -36.4 -42.0 -47.2 -53.0 -58.1 -63.6 -68.6 -73.8	.194 .202 .210 .221 .229 .238 .248 .258 .270 .278 .289	-12.2 -15.1 -18.1 -21.1 -24.4 -27.7 -31.2 -34.6 -38.4 -42.1 -45.8	.313 .307 .301 .297 .291 .287 .285 .282 .283 .281 .285	-81.0 -85.4 -94.2 -99.7 -104.4 -110.4 -115.7 -121.9 -127.9 -133.6	

# $V_{\text{CE}}$ = 3 V, Ic = 1 mA, Zo = 50 $\Omega$

FREQUENCY		S11	S	21	St	2	S	22
MHz	MAG	ANG	MAG	ANG	MAG	ANG	MAG	ANG
100.00	.985	-16.6	1.985	159.3	.041 .077	75.7 60.9	.985 .947	-8.0
200.00 300.00	.945 .908	-33.5 -49.9	1.998 2.025	142.9 127.8	.106	49.0	.892	–15.6 –21.8
400.00	.908	-49.9 -65.6	1.942	114.4	.127	37.8	.842	-26.7
500.00	.812	-80.4	1.942	102.3	.143	28.8	.795	-20.7
600.00	.766	-93.7	1.755	90.0	.152	20.0	.754	-34.5
700.00	.726	-106.2	1.705	79.4	.152	13.3	.722	-37.6
800.00	.693	-118.6	1.635	68.7	.162	6.9	.692	-40.4
900.00	.664	-129.4	1.571	59.3	.163	1.9	.667	-42.9
1000.00	.644	-139.6	1.509	50.0	.166	-3.7	.645	-45.8
1100.00	.627	-148.2	1.438	41.7	.165	-7.4	.630	-48.3
1200.00	.617	-157.0	1.375	33.4	.163	-11.0	.616	-51.3
1300.00	.607	-164.2	1.299	25.8	.162	-14.3	.603	-53.9
1400.00	.604	-171.0	1.247	18.5	.162	-17.1	.593	-57.3
1500.00	.600	-177.5	1.183	11.1	.159	-19.6	.583	-60.3
1600.00	.604	176.6	1.140	4.4	.158	-21.5	.575	-63.7
1700.00	.600	170.6	1.093	-2.6	.157	-23.4	.566	-67.2
1800.00	.604	165.7	1.048	-8.9	.157	-23.7	.561	-70.6
1900.00	.608	160.5	1.012	-15.5	.158	-25.0	.553	-74.5
2000.00	.611	155.8	.973	-21.4	.160	-25.4	.549	-78.5
2100.00	.620	151.0	.942	-27.7	.165	-26.5	.543	-82.7
2200.00	.622	147.2	.905	-33.3	.170	-26.9	.537	-87.0
2300.00	.631	143.0	.884	-39.3	.176	-28.0	.532	-91.5
2400.00	.632	139.2	.846	-44.9	.183	-29.2	.528	-96.4
2500.00	.642	135.9	.824	-50.0	.192	-30.0	.523	-101.0
2600.00	.647	132.0	.799	-55.6	.202	-32.3 -34.4	.522	-106.4
2700.00	.652	129.1	.774	-60.5	.214	-34.4 -36.9	.519	-111.8
2800.00 2900.00	.660 .664	125.6 122.9	.752 .726	-65.8 -70.5	.226 .238	-36.9 -39.7	.518 .516	-117.2 -122.5
3000.00	.674	119.9	.720	-75.2	.254	-39.7 -42.7	.517	-122.5 -128.2
0000.00	.07 4	110.0	.700	10.2	.204	76.1	.017	120.2

[MEMO]

No part of this document may be copied or reproduced in any form or by any means without the prior written consent of NEC Corporation. NEC Corporation assumes no responsibility for any errors which may appear in this document.

NEC Corporation does not assume any liability for infringement of patents, copyrights or other intellectual property rights of third parties by or arising from use of a device described herein or any other liability arising from use of such device. No license, either express, implied or otherwise, is granted under any patents, copyrights or other intellectual property rights of NEC Corporation or others.

While NEC Corporation has been making continuous effort to enhance the reliability of its semiconductor devices, the possibility of defects cannot be eliminated entirely. To minimize risks of damage or injury to persons or property arising from a defect in an NEC semiconductor device, customer must incorporate sufficient safety measures in its design, such as redundancy, fire-containment, and anti-failure features. NEC devices are classified into the following three quality grades:

"Standard", "Special", and "Specific". The Specific quality grade applies only to devices developed based on a customer designated "quality assurance program" for a specific application. The recommended applications of a device depend on its quality grade, as indicated below. Customers must check the quality grade of each device before using it in a particular application.

Standard: Computers, office equipment, communications equipment, test and measurement equipment, audio and visual equipment, home electronic appliances, machine tools, personal electronic equipment and industrial robots

Special: Transportation equipment (automobiles, trains, ships, etc.), traffic control systems, anti-disaster systems, anti-crime systems, safety equipment and medical equipment (not specifically designed for life support)

Specific: Aircrafts, aerospace equipment, submersible repeaters, nuclear reactor control systems, life support systems or medical equipment for life support, etc.

The quality grade of NEC devices in "Standard" unless otherwise specified in NEC's Data Sheets or Data Books. If customers intend to use NEC devices for applications other than those specified for Standard quality grade, they should contact NEC Sales Representative in advance.

Anti-radioactive design is not implemented in this product.

M4 94.11