


# 2N6788LCC4 IRFE120

#### **MECHANICAL DATA**

Dimensions in mm (inches)

# N-CHANNEL POWER MOSFET ENHANCEMENT MODE

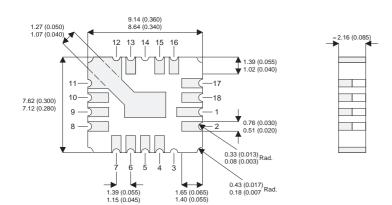

## **FEATURES**

- AVALANCHE ENERGY RATING
- SIMPLE DRIVE REQUIREMENTS
- HERMETICALLY SEALED CERAMIC SURFACE MOUNT

# LCC4 Ceramic Package DSCC Package (U5)

### **Underside View**

GATE Pins 4,5

DRAIN Pins1,2,15,16,17,18 SOURCE Pins 6,7,8,9,10,11,12,13

## **APPLICATIONS**

- FAST SWITCHING
- MOTOR CONTROLS
- POWER SUPPLIES

## **ABSOLUTE MAXIMUM RATINGS** (T<sub>case</sub> = 25°C unless otherwise stated)

$V_{DS}$	Drain Source Voltage	100V
I <sub>D @</sub> T <sub>case</sub> = 25°C	Continuous Drain Current	4.5A
$I_D @ T_{case} = 100$ °C	Continuous Drain Current	3.0A
I <sub>DM</sub>	Pulsed Drain Current <sup>1</sup>	18A
$V_{GS}$	Gate Source Voltage	±20V
$P_D$ @ $T_{case} = 25$ °C	Maximum Power Dissipation	14W
$R_{ heta J-C}$	Thermal Resistance Junction To Case	9.1°C/W
$T_{J,T_{stg}}$	Operating and Storage Temperature Range	-55 to +150°C
Lead Temperature	$(\frac{1}{16}$ " from case for 10 secs)	300°C

Semelab Plc reserves the right to change test conditions, parameter limits and package dimensions without notice. Information furnished by Semelab is believed to be both accurate and reliable at the time of going to press. However Semelab assumes no responsibility for any errors or omissions discovered in its use. Semelab encourages customers to verify that datasheets are current before placing orders.

Semelab plc. Telephone +44(0)1455 556565. Fax +44(0)1455 552612. E-mail: <a href="mailto:sales@semelab.co.uk">sales@semelab.co.uk</a> Website: <a href="mailto:http://www.semelab.co.uk">http://www.semelab.co.uk</a>



# 2N6788LCC4 IRFE120

# **ELECTRICAL CHARACTERISTICS** (T<sub>case</sub> = 25°C unless otherwise stated)

Parameter		Test Conditions		Min.	Тур.	Max.	Unit
	STATIC ELECTRICAL RATINGS						
BV <sub>DSS</sub>	Drain – Source Breakdown Voltage	$V_{GS} = 0$	I <sub>D</sub> = 1.0mA	100			V
V <sub>GS(th)</sub> *	Gate Threshold Voltage	$V_{DS} = V_{GS}$	I <sub>D</sub> = 250μA	2.0		4.0	
I <sub>GSSF</sub>	Gate Body Leakage Forward	V <sub>GS</sub> = 20V				100	nA
I <sub>GSSR</sub>	Gate Body Leakage Reverse	V <sub>GS</sub> = -20V				-100	] "
I <sub>DSS</sub>	Zero Gate Voltage Drain Current	V <sub>DS</sub> = 80V.	V <sub>GS</sub> =0			25	μА
	<u> </u>		T <sub>C</sub> = 125°C			250	
R <sub>DS(on)</sub> *	Static Drain Source On-State	V <sub>GS</sub> = 10V	I <sub>D</sub> = 3.0A			0.30	$\Omega$
	Resistance	$V_{GS} = 10V$	$I_{D} = 4.5A$			0.345	
gfs*	Forward Transconductance	$V_{DS} = 15V$	$I_{DS} = 3.0A$	1.5			S (O)
	DYNAMIC CHARACTERISTICS						
C <sub>iss</sub>	Input Capacitance	$V_{GS} = 0$	$V_{DS} = 25V$		350		
C <sub>oss</sub>	Output Capacitance	f = 1MHz			150		pF
C <sub>rss</sub>	Reverse Transfer Capacitance				24		1
t <sub>d(on)</sub>	Turn-On Delay Time	V <sub>DD</sub> = 50V	I <sub>D</sub> = 4.5A			40	
t <sub>r</sub>	Rise Time	$R_G = 7.5\Omega$	V <sub>GS</sub> = 10V			70	ns
t <sub>d(off)</sub>	Turn-Off Delay Time	(MOSFET switching times are essentially independent of operating temperature.)				40	
t <sub>f</sub>	Fall Time					70	
Qg	Total Gate Charge	V <sub>GS</sub> = 10V	I <sub>D</sub> = 4.5A			17	
Q <sub>gs</sub>	Gate To Source Charge	V <sub>DS</sub> = 50V				4.0	nC
Q <sub>gd</sub>	Gate To Drain ("Miller") Charge		-			7.7	1
_ ĭ	BODY- DRAIN DIODE RATINGS & O	HARACTERIST	TICS	<u> </u>		<u>I</u>	
I <sub>S</sub>	Continuous Source Current (Body Diode)	Modified MOS POWER symbol showing the intergal G. P-N junction rectifier.				4.5	- A
I <sub>SM</sub>	Source Current (Body Diode)					18	
V <sub>SD</sub>	Diode Forward Voltage*	I <sub>S</sub> = 4.5A T <sub>J</sub> = 25°C			1.8	V	
t <sub>rr</sub>	Reverse Recovery Time	I <sub>F</sub> = 4.5A	T <sub>J</sub> = 25°C			240	ns
Q <sub>RR</sub>	Reverse Recovery Charge $d_i / d_t = 100A/\mu s V_{DD} = 50V$		s V <sub>DD</sub> = 50V			2.0	μС

## **Notes**

\* Pulse Test: Pulse Width  $\leq 300 \mu s$ ,  $\delta \leq 2\%$ 

Semelab Plc reserves the right to change test conditions, parameter limits and package dimensions without notice. Information furnished by Semelab is believed to be both accurate and reliable at the time of going to press. However Semelab assumes no responsibility for any errors or omissions discovered in its use. Semelab encourages customers to verify that datasheets are current before placing orders.

Semelab plc. Telephone +44(0)1455 556565. Fax +44(0)1455 552612. Document Number 5652

E-mail: <a href="mailto:sales@semelab.co.uk">sales@semelab.co.uk</a> Website: <a href="mailto:http://www.semelab.co.uk">http://www.semelab.co.uk</a> Issue 1