			SPEC.NO.	TQ3C-8EAF0	-E1DKB13-00
			DATE	June 2	6, 2007
SPEC					
	<u>F 0</u>	R :			
	<u> </u>	<u>HG062H</u>	/LAH-G() ()	
		CONTEN	ΓS		
 Application Construction Mechanical S Absolute Max Electrical C Optical Char Interface Si Timing Chara Backlight Ch Lot Number I Warranty Precautions Reliability Outline Draw 	pecifications imum Ratings haracteristics gnals cteristics of aracteristics dentification for Use Data / Enviro	s input signal		Issued Date: August 10 KYDCERƏ Hayato LCD Div	
	C C		KA	OCERA CORPORAT GOSHIMA HAYAT(D DIVISION	
-	ification is yocera before	subject to ch ordering.	ange without	notice.	
Original		:Engineering	Dept.	Confirmed by	/ :QA Dept.
Issue Date	Prepared	Checked	Approved	Checked	Approved
June 26, 2007	D. Ajisaka	79. Johnword	J. Matsumpto	J. Sakaguch	Je Jak

Warning

- 1. This Kyocera LCD module has been specifically designed for use only in electronic devices and industrial machines in the area of audio control, office automation, industrial control, home appliances, etc. The module should not be used in applications where the highest level of safety and reliability are required and module failure or malfunction of such module results in physical harm or loss of life, as well as enormous damage or loss. Such fields of applications include, without limitation, medical, aerospace, communications infrastructure, atomic energy control. Kyocera expressly disclaims any and all liability resulting in any way to the use of the module in such applications.
- 2. Customer agrees to indemnify, defend and hold Kyocera harmless from and against any and all actions, claims, damages, liabilities, awards, costs and expenses, including legal expenses, resulting from or arising out of Customer's use, or sale for use, or Kyocera modules in applications.

Caution

1. Kyocera shall have the right, which Customer hereby acknowledges, to immediately scrap or destroy tooling for Kyocera modules for which no Purchase Orders have been received from the Customer in a two-year period.

Revision Record

D		Design	ed by:	Engineering D	ept.	Confirmed by:	QA Dept.
Date		Prepa	red	Checked	Approved	Checked	Approved
Rev. No.	Date		Page		Descriptio	ns	

1. Application

This data sheet defines the specification for a $(640 \times R.G.B) \times 240$ dot, amorphous silicon TFT transflective color dot matrix type Liquid Crystal Display with LED backlight. ^{\square} RoHS Compliant^{\square}


2. Construction and Outline

 $(640 \times R.G.B) \times 240$ dots, COG type LCD with LED backlight.

Backlight system : Side-edge type (LED).

Polarizer : Glare treatment.

Additional circuits : Timing controller, Power supply (3.3V input)

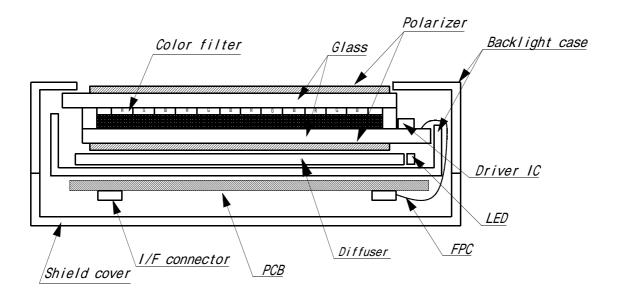

This drawing is showing conception only.

3. Mechanical Specifications

ITEM	SPECIFICATION	UNIT
Outline dimensions	174.2 (W) × 73.4 (H) × 12.2 (D)	mm
Effective viewing area	149.8 (W) × 57.4 (H)	mm
Dot number	(640×R.G.B) (W) × 240 (H)	Dots
Dot pitch	0.077 (W) × 0.231 (H)	mm
Display mode *1	Normally white	-
Mass	(TBD)	g

*1 Due to the characteristics of the LCD material, the color vary with environmental temperature.

4. Absolute Maximum Ratings

4-1. Electrical absolute maximum ratings

ITEM		SYMBOL	Min.	Max.	UNIT
Power input voltage		VDD	0	4.0	V
Input signal voltage	*1	Vin	-0.3	6.0	V
Forward current	*2	IF	—	(17)	mA
Reversed voltage	*2	VR	—	(5)	V

*1 Input signals : CK, R0~R5, G0~G5, B0~B5, Hsync, Vsync, ENAB, R/L, U/D, V/Q

*2 For each : "AN1-CA1", "AN2-CA2", "AN3-CA3", "AN4-CA4".

4-2. Environmental absolute maximum ratings

ITEM		SYMBOL	Min.	Max.	UNIT
Operating temperature	Operating temperature *1		(-20)	(70)	
Storage temperature	*2	Tsto	(-30)	(80)	
Operating humidity	Operating humidity *3		10	*4	%R H
Storage humidity	Storage humidity *3		10	*4	%R H
Vibration		-	*5	*5	-
Shock		-	*6	*6	-

- *1 Operating temperature means a temperature which operation shall be guaranteed. Since display performance is evaluated at 25 , another temperature range should be confirmed.
- *2 Temp. = -30 < 48 h , Temp = 80 < 168 h Store LCD panel at normal temperature/humidity. Keep it free from vibration and shock. LCD panel that is kept at low or high temperature for a long time can be defective due to the other conditions, even if the temperature satisfies standard. (Please refers to 12. Precautions for use as detail).
- *3 Non-condensation.
- *4 Temp. 40 , 85%RH Max. Temp. > 40 , Absolute Humidity shall be less than 85% RH at 40 .

*5

Frequency	10~55 Hz	Converted to acceleration value :
Vibration width	0.15 mm	$(0.3 \sim 9 \text{ m/s}^2)$
Interval	10-55-10 Hz	1 minute

2 hours in each direction $\mbox{X/Y/Z}$ (6 hours as total) EIAJ ED-2531


*6 Acceleration: 490m/s²
Pulse width : 11 ms
3 times in each direction : ±X/±Y/±Z.
EIAJ ED-2531

5. Electrical Characteristics

$VDD = +3.3V \pm 0.3V$, Temp. = (TBD)

ITEM	SYMBOL	MIN	TYP	MAX	UNIT	
Power input voltage *1	VDD=3.3V	VDD	3.0	3.3	3.6	V
Current consumption *2	3.3۷=300	IDD	-	(230)	(300)	mA
Permissive input ripple v	Permissive input ripple voltage(VDD=3.3V)			-	(100)	mVp-p
Input signal voltage (L	Vil	0	-	0.3VDD	V	
Input signal voltage (H	Viн	0.7VDD	-	+5.5	V	

*1 VDD-turn-on conditions

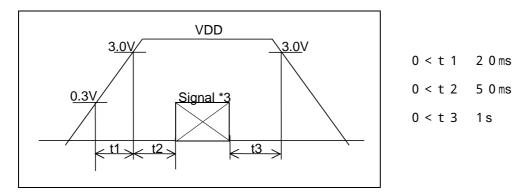

*2 Power consumption Pattern :

*3 Input signals : CK, R0~R5, G0~G5, B0~B5, Hsync, Vsync, ENAB, R/L, U/D, V/Q

6 . Optical Characteristics

6-1. Reflective mode

Measuring points = 6.0mm , Temp. = 25

ITEM		SYMBOL	CONDITION	MIN	TYP	MAX	UNIT
time	Rise	r	= =0°	-	(10)	-	ms
	Down	d	= =0°	-	(10)	-	ms
Contrast ratio)	CR	= =0°	(20)	(35)	-	-
Refrectance			= =0°	(15)	(25)	-	%


6-2. Transmissive mode

ITEM		SYMBO L	CONDITION		MIN	ТҮР	MAX	UNIT
Response	Rise	r	=	=0°	-	(10)	-	ms
time	Down	d	=	=0°	-	(10)	-	ms
				Upper	-	(40)	-	dog
Viewing angle	*****		CR 5	Lower	-	(40)	-	deg.
viewing angre	Viewing angle range		UK D	Left	-	(60)	-	dog
				Right	-	(70)	-	deg.
Contrast rati	Contrast ratio		= =0°		(25)	(40)	-	-
Brightness		L	IF=15mA/1LED line		(40)	(60)	-	cd/m²
	Red	х		=0°	(TBD)	(TBD)	(TBD)	
		у	=	=0	(TBD)	(TBD)	(TBD)	
	Green	x		=0°	(TBD)	(TBD)	(TBD)	
Chromoticity	Green	у	=	=0	(TBD)	(TBD)	(TBD)	
Chromaticity coordinates	Blue	х		=0°	(TBD)	(TBD)	(TBD)	-
	DIUU	у	=	=0	(TBD)	(TBD)	(TBD)	
	White	х		=0°	(TBD)	(TBD)	(TBD)	
	winte	У	=	=0	(TBD)	(TBD)	(TBD)	


6-3. Definition of Reflectance


6-5. Definition of Contrast (Transmissive Mode)

6-6. Definition of Response time

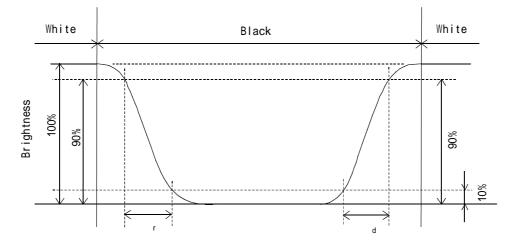


6-7. Definition of viewing angle

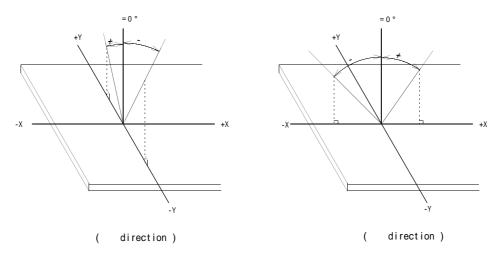

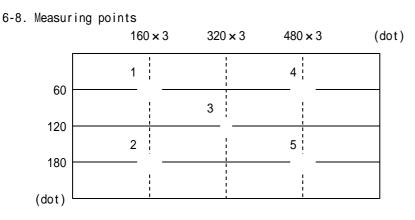

- 1) Rating is defined as the average brightness inside the viewing area.
- 2) 30 minutes after LED is turned on. (Ambient Temp.=25)
- 3) Backlight : IF = 15mA / 1 LED line

6-9. Measurement method of reflecrtance




7 . Interface signals

7-1. LCD				
PIN NO.	SYMBOL	DESCRIPTION	1/0	Note
1	GND	GND	-	
2	CK	Clock signal for sampling each data signal	I	
3	Hsync	Horizontal synchronous signal (negative)		
4	Vsync	Vertical synchronous signal (negative)	I	
5	GND	GND	-	
6	RO	RED data signal (LSB)	I	
7	R1	RED data signal		
8	R2	RED data signal		
9	R3	RED data signal		
10	R4	RED data signal		
11	R5	RED data signal (MSB)		
12	GND	GND	-	
13	GO	GREEN data signal (LSB)		
14	G1	GREEN data signal		
15	G2	GREEN data signal		
16	G3	GREEN data signal		
17	G4	GREEN data signal	I	
18	G5	GREEN data signal (MSB)		
19	GND	GND	-	
20	BO	BLUE data signal (LSB)		
21	B1	BLUE data signal		
22	B2	BLUE data signal	I	
23	B3	BLUE data signal		
24	B4	BLUE data signal		
25	B5	BLUE data signal (MSB)		
26	GND	GND	-	
27	ENAB	Signal to settle the horizontal display position (positive)	Ι	*1
28	VDD	3.3V power supply	-	
29	VDD	3.3V power supply	-	
30	R/L	Horizontal display mode select signal	Ι	*2
		H : Normal , L : Left / Right reverse mode		
31	U/D	Vertical display mode select signal	I	*2
		L : Normal , H : Up / Down reverse mode		
32	V/Q	H : Normal	I	
33	GND	GND	-	

LCD side connector : 08-6210-033-340-800+ (ELCO) Recommended matching FFC or FPC : pitch=0.5mm

*1 The horizontal display start timing is settled in accordance with a rising timing of ENAB signal. In case ENAB is fixed "Low", the horizontal start timing is determined as described in 8–2. Don't keep ENAB "High" during operation.

*2



7-2. LED Backlight

PIN No.	SYMBOL	DESCRIPTION
1	AN1	Anode1
2	AN2	Anode2
3	AN3	Anode3
4	AN4	Anode4
5	CA4	Cathode4
6	CA3	Cathode3
7	CA2	Cathode2
8	CA1	Cathode1

LED Backlight side connector : FPC Recommended matching connector : IMSA-9637S (IRISO)

8. Timing Characteristics of input signals

8-1. Timing characteristics

ITE	М	SYMBOL	MIN	TYP	MAX	UNIT	NOTE
Clock	Frequency	1/Tc	-	25.18	28.33	MHz	V/Q=H
	Duty ratio	Tch/Tc	40	50	60	%	
Data	Set up time	Tds	5	-	-	ns	
Data	Hold time	Tdh	10	-	-	ns	
Horizontal sync.	Cycle	T 11	30.0	31.8	-	μs	
signal		TH	770	800	900	clock	V/Q=H
	Pulse width	ТНр	2	96	200	clock	
Vertical sync.	Cycle	ΤV	515	525	560	line	V/Q=H
signal	Pulse width	TVp	2	-	34	line	
Horizontal displa	y period	THd		640		clock	
HsyncClock phas	e difference	THc	10	-	Tc-10	ns	
HsyncVsync. pha	HsyncVsync. phase difference		0	-	TH-THp	ns	
Vertical sync.signal start position		TVs		34		line	V/Q=H
Vertical display	period	TVd		240		line	

*In case of lower frequency, the deterioration of the display quality, flicker etc., may occur.

8-2. Horizontal display position The horizontal display position is determined by ENAB signal.

ITEM		SYMBOL	MIN	TYP	MAX	UNIT	NOTE
Enchlo oignol	Set up time	Tes	5	-	Tc-10	ns	
Enable signal	Pulse width	Тер	2	640	TH-10	clock	
HsyncEnable signal phase difference		The	44	-	TH-664	clock	V/Q=H


*When ENAB is fixed at "Low", the display starts from the data of C104(clock) as shown in 8-5.

8–3. Vertical display position The vertical display position (TVs) is fixed at 34th line (V/Q=H). Note) ENAB signal is independent of vertical display position.

D1,DH1	D2,DH1	D3,DH1		D640,DH1
D1,DH 2	D2,DH2	D3,DH2		
		5		
			RGB	
	:			
D1,DH 2 40	D2,DH240	D3,DH240		

8-4. Input Data Signals and Display position on the screen

8-5. Input Timing Characteristics

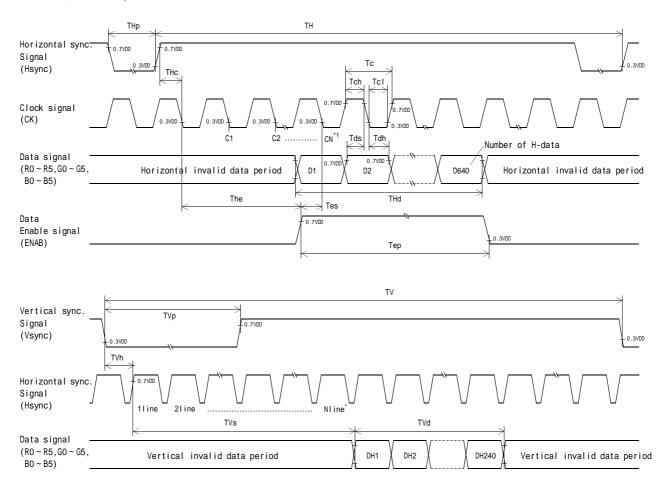

*1 When ENAB is fixed at V/Q="H", the display starts from the data of C104(Clock).


*2 The vertical display position(TVs) is fixed at 34^{th} line(V/Q=H).

9. Backlight Characteristics

Temp. = 25

ITEM	SYMBOL	MIN.	TYP.	MAX.	Unit	NOTE
Forward current *1	١F	-	(15)	-	mA	Ta=25
		-	(23.8)	(26.0)	V	IF=(15)mA, Ta=-(20)
Forward voltage	VF	-	(21.7)	(23.8)	V	IF=(15)mA, Ta=25
		-	(21.5)	(23.5)	V	IF=(15)mA, Ta=(70)
Operating life *2	Т	-	(TBD)*3	-	h	IF=(15)mA, Ta=25

*1 For each "AN1-CA1", "AN2-CA2", "AN3-CA3" and "AN4-CA4".

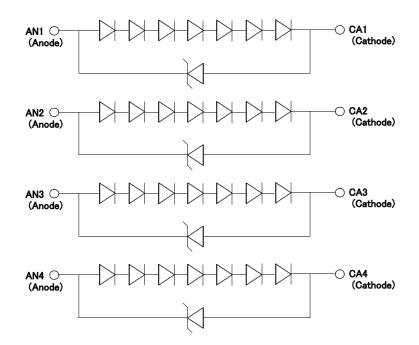

 *2 When surface brightness decreases 50% of initial brightness .

*3 Life time is estimated data.

* A forward current below 8.0mA may reduce the brightness uniformity of the LED backlight. This is because the amount of light from each LED chip is different. Therefore, please evaluate carefully before finalizing the input current.

10.Lot Number Identification

The lot number shall be indicated on the back of the backlight case of each LCD.

ΤН	G 0 6 2 H V	L A H - G 0	\downarrow		- MAD ↓ ④	E IN _	↓ ⑤
					YEAR MONTH DATE Version Nu Country of	mber origin (JAP	AN orCHINA)
	YEAR	2007	2008	2009	2010	2011	2012
	CODE	7	8	9	0	1	2
	MONTH			MAD	400		
	MONTH	JAN.	FEB.	MAR.	APR.	MAY.	JUN.
	CODE	1	2	3	4	5	6
					1	1	1
	MONTH	JUL.	AUG.	SEP.	OCT.	NOV.	DEC.
	CODE	7	8	9	Х	Y	Z

1 1 . Warranty

11-1. Incoming inspection


Please inspect the LCD within one month after your receipt.

11-2. Production Warranty

Kyocera warrants its LCDs for a period of 12 months after receipt by the purchaser, and within the limits specified. Kyocera shall, by mutual agreement, replace or rework defective LCDs that are shown to be Kyocera's responsibility.

1 2 . Precautions for use

- 12-1. Installation of the LCD
- 1. The LCD's bezel must be grounded. The heat sink and shield cover are connected at the ground hole. The ground hole is located on the right side of the LCD when viewed from the front. The ground hole must be connected to an external ground.

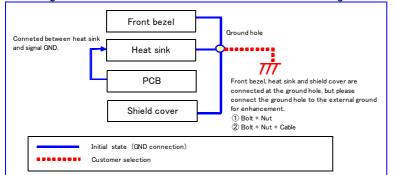

- 2. A transparent protection sheet shall be added to protect the LCD and its polarizers.
- 3. The LCD shall be installed so that there is no pressure on the LSI chips.
- 4. The LCD shall be installed flat, without twisting or bending.
- 5. The display window size should be the same as the effective viewing area.
- 6. In case you use outside frame of effective viewing area as outward appearance of your product, unevenness of its outward appearance is out of guarantee.
- 7. Please refer to the following our recommendable value of Clamp-down torque when installing. Clamp-down torque:0.265 ± -0.025N.m Please set up'SPEED-LOW', 'SOFT START-SLOW' when using electric driver . Recommendable screw JIS tapping screw two types nominal dia.3.0mm installing boss hole depth 4.2±0.5mm

Please be careful not to use high torque which may damage LCD module in installation.

- 8. A transparent protection sheet is attached to the polarizer. Please remove the protection film slowly before use, paying attention to static electricity.
- 9. This Kyocera LCD module has been specifically designed for use in general electronic devices, but not for use in a special environment such as usage in an active gas. Hence, when the LCD is supposed to be used in a special environment, evaluate the LCD thoroughly beforehand and do not expose the LCD to chemicals such as an active gas.
- 12-2. Static Electricity
- 1. Since CMOS ICs are mounted directly onto the LCD glass, protection from static electricity is required. Operator should wear ground straps.

12-3. LCD Operation

- 1. The LCD shall be operated within the limits specified. Operation at values outside of these limits may shorten life, and/or harm display images.
- 2. Operation of the LCD at temperature below the limit specified may cause image degradation and/or bubbles.

It may also change the characteristics of the liquid crystal.

This phenomenon may not recover. The LCD shall be operated within the temperature limits specified.

12-4. Storage

- 1. The LCD shall be stored within normal temperature and humidity.
- Store in a dark area, and protected the LCD from direct sunlight or fluorescent light.
- 2. The LCD should be packaged to prevent damage.

12-5. Screen Surface

- 1. <u>DO NOT</u> store in a high humidity environment for extended periods. Polarizer degradation bubbles, and/or peeling off of the polarizer may result.
- 2. The front polarizer is easily scratched or damaged. Prevent touching it with any hard material, and from being pushed or rubbed.
- 3. The LCD screen may be cleaned by wiping the screen surface with a soft cloth or cotton pad using a little Ethanol.
- 4. Water may cause damage or discoloration of the polarizer. Clean condensation or moisture from any source immediately.
- 5. Always keep the LCD free from condensation during testing. Condensation may permanently spot or stain the polarizer.
- 6. Do not pull the LED cable and do not bend the root of the wires. Housing should be designed to protect LED cable from external stress.
- 7. Do not disassemble LCD module because it will result in damage.
- 8. Please do not use solid-base image pattern for long hours because a temporary afterimage may appear. We recommend using screen saver etc. in cases where a solid-base image pattern must be used.
- 9. Liquid crystal may leak when the module is broken. Be careful not to let the fluid go into your eyes and mouth. In the case the fluid touches your body; rinse it off right away with water and soap.

TEST ITEM	TEST CONDITION	TEST TIME	RESL	ILT
High Temp. Atmosphere	80	240h	Display Quality Display Function Current Consumption	: (TBD)
Low Temp. Atmosphere	-30	240h	Display Quality Display Function Current Consumption	: (TBD)
High Temp. Humidity Atmosphere	40 90 %RH	240h	Display Quality Display Function Current Consumption	: (TBD) : (TBD) : (TBD)
Temp. Cycle	-30 0.5 h R.T. 0.5 h 80 0.5 h	10 cycles	Display Quality Display Function Current Consumption	: (TBD) : (TBD) : (TBD)
High Temp. Operation	70	240h	Display Quality Display Function Current Consumption	


1 3 . Reliability Data / Environmental Test

* Each test item uses a test LCD only once. The tested LCD is not used in any other tests.

* The LCD is tested in circumstances in which there is no condensation.

* The reliability test is not an out-going inspection.

* The results of the reliability test are for your reference purpose only. The reliability test is conducted only to examine the LCD's capability.

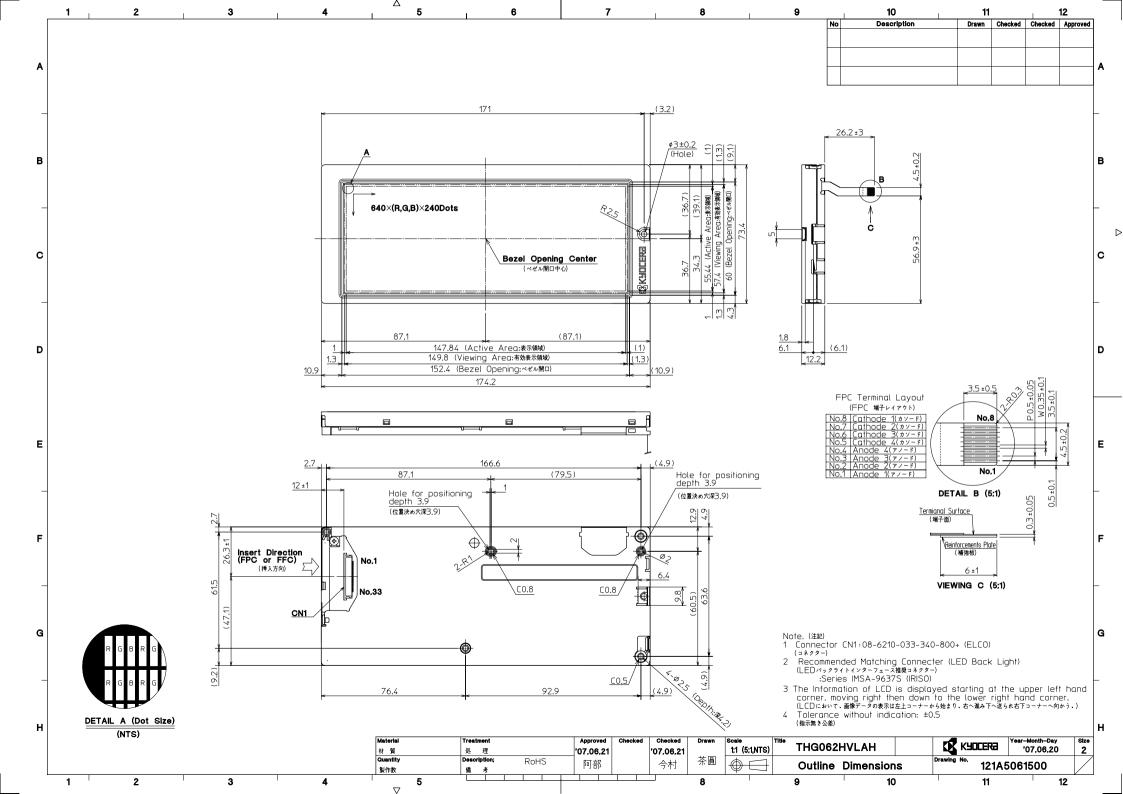

			SPEC.NO.	TQ3C-8EAF0-	E2DKB13-00	
			DATE	June 26	6, 2007	
	F C) R :				
KY	OCERA II	NSPECIL	<u>un stat</u>	NUARD		
	TYPE :	THG062H	IVLAH-G	00		
			KYO	CERA CORPORAT	ION	
				OSHIMA HAYATO DIVISION	PLANT	
Original	Designed by :Engineering Dept. Confirmed by :QA Dept					
Issue Date	Prepared	Checked	Approved	Checked	Approved	
June 26, 2007	D. Ajisaka	79. Johnmored	I Matsumpto	J. Sakaguchi	Je Va	

Revision Record

Date -		Design	ed by:	Engineering D	ept.	Confirmed by:	QA Dept.
Date		Prepa	red	Checked	Approved	Checked	Approved
Rev. No.	Date		Page		Descriptio	ons	

1) Note

		Note						
General	 Should any de additional st customer and Inspection Co Luminance Inspection d Temperature Direction 	Conditions : 500 Lux minimum distance : 300 mm (from the sample) : 25 ± 5						
Definition of Inspection item	Dot defect	:directly a Bright dot	Defect constantl yappears bright, even in display of all "Black" pixels. Count : Visible though 5% transparency o f filter. No count : Not visible though 5% trans -parency of filter. RGBRGBRGB RGBRGBRGB RGBRGBRGB					
		Black dot Defect constantly app "White" pixels, Size dot.						
		Two dots join	Dot join defect is defined as two or more dots which always display a matching brightness, even when each of them is set to different brightness value. RGBRGBRGB dot defect RGBRGBRGB dot defect RGBRGBRGB As the above shows, two dot join is					
	External inspection	Bubble,Scratches, Foreign particle (Polarizer, Cell, Backlight)	defined as defects of two adjoing dots like 'R' and 'G'. Visible operating (all pixcels "Black" or "White") and non operating.					
	Others	CFL lead wires	Damaged CFL lead wires, functional failu re, appearance failure.					
	Definition of size	Definition of cir a $d = \frac{(a+b)}{2}$	Definition of linear size					

2) Standard

Classification	Inspection item		Judgement standard				
Dot defect	Bright dot		Acceptable numb Bright dot spac	er : 4	brigh	t dots more	
	Black dot		Acceptable numb Black dot spaci	er : 5	black	dots more	
	Bright dot		Acceptable number : 2				
	2 dots join	Black dot	Acceptable number : 3				
	3 or more dot		Acceptable number : 0				
	Total dot def	-	Acceptable numb		Max		
	White dot, BI	ack dot					
	(Circle)		Size(mn	•	A	cceptable Number	
	, , ,		d <			(neglected)	
			0.2 < d			5	
			0.4 < d	0.5		3	
			0.5 < d			0	
External inspection	Polarizer(Scr	atches)	Width(mm)	Length(r	nm)	Acceptable Number	
			W 0.1	-		(neglected)	
				L	5.0	(neglected)	
			0.1 <w 0.3<="" td=""><td colspan="2">5.0<l< td=""><td>0</td></l<></td></w>	5.0 <l< td=""><td>0</td></l<>		0	
			0.3 <w -<="" td=""><td></td><td colspan="2">0</td></w>			0	
	Polarizer (Bubble, Dent)			-)		Acceptable Number	
			Size(mm)		(neglected)		
				d < 0.2 0.2 < d 0.3 0.3 < d 0.5 0.5 < d		(negrected)	
						3	
						0	
			0.5<0			0	
	Foreign Parti shape)	cle(Circular	Size(mm)		Acceptable Number		
			d <	0.2		(neglected)	
			0.2 <d 0.4<="" td=""><td colspan="2">5</td></d>		5		
			0.4 < d 0.5		3		
			0.5 < d		0		
	Foreign Parti shape),Scratc	cle(Linear hes	Width(mm)	Length(r	nm)	Acceptable Number	
		-	W 0.03	-	,	(neglected)	
				L	2.0	(neglected)	
			0.03 < W 0.1		4.0	3	
				4.0 < L		0	
				-		(According to Circular shape)	