



ACE7436M

N-Channel 30-V MOSFET

Description

The ACE7436M uses advanced trench technology to provide excellent $R_{DS(ON)}$, low gate charge. This device is suitable for use as a high side switch in SMPS and general purpose applications.

Features

- Low $r_{DS(on)}$ trench technology
- Low thermal impedance
- Fast switching speed

Applications

- DC/DC Conversion
- Power Routing
- Motor Drives

Absolute Maximum Ratings

| Parameter | Symbol | Limit | Units |
|--|----------------|------------------------|------------------|
| Drain-Source Voltage | V_{DS} | 30 | V |
| Gate-Source Voltage | V_{GS} | ± 20 | V |
| Continuous Drain Current ^a | I_D | $T_A=25^\circ\text{C}$ | 27 |
| | | $T_A=70^\circ\text{C}$ | 22 |
| Pulse Drain Current ^b | I_{DM} | 100 | A |
| Continuous Drain Current (Diode Continuous) ^a | I_S | 6.7 | A |
| Power Dissipation ^a | P_D | $T_A=25^\circ\text{C}$ | 5 |
| | | $T_A=70^\circ\text{C}$ | 3.2 |
| Operating Junction and Storage Temperature Range | T_J, T_{STG} | -55 to 150 | $^\circ\text{C}$ |

| Parameter | Symbol | Maximum | Units |
|--|-----------------|---------------------|-------|
| Maximum Junction-to-Ambient ^a | $R_{\theta JA}$ | $t \leq 10\text{s}$ | 25 |
| | | Steady State | 65 |

Notes

a. Surface Mounted on 1" x 1" FR4 Board.

b. Pulse width limited by maximum junction temperature




ACE7436M

N-Channel 30-V MOSFET


Packaging Type

DFN5*6-8L

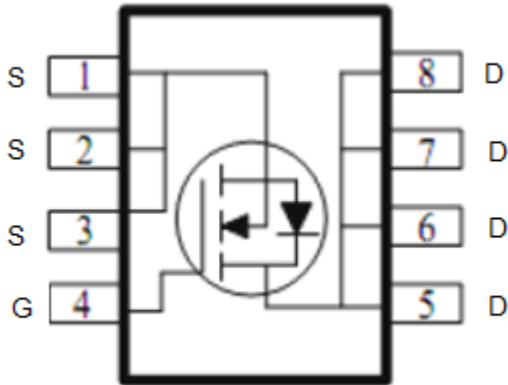

Ordering information

ACE7436M PN + H

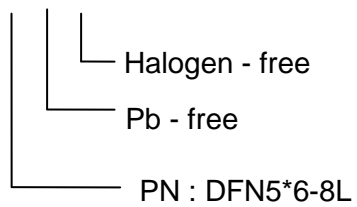



ACE7436M

N-Channel 30-V MOSFET

Electrical Characteristics $T_A=25^\circ\text{C}$ unless otherwise noted

| Parameter | Symbol | Conditions | Min. | Typ. | Max. | Unit |
|--|--------------|--|------|------|-----------|------------|
| Static | | | | | | |
| Gate Source Threshold Voltage | $V_{GS(th)}$ | $V_{DS}=V_{GS}, I_D=250\mu\text{A}$ | 1 | | | V |
| Gate Body Leakage | I_{GSS} | $V_{DS}=0\text{V}, V_{GS}=\pm 20\text{V}$ | | | ± 100 | nA |
| Zero Gate Voltage Drain Current | I_{DSS} | $V_{DS}=24\text{V}, V_{GS}=0\text{V}$ | | | 1 | uA |
| | | $V_{DS}=24\text{V}, V_{GS}=0\text{V}, T_J=55^\circ\text{C}$ | | | 10 | |
| On-State Drain-Current ^a | $I_{D(on)}$ | $V_{DS}=5\text{V}, V_{GS}=10\text{V}$ | 40 | | | A |
| Static Drain-Source On-Resistance ^a | $r_{DS(ON)}$ | $V_{GS}=10\text{V}, I_D=20\text{A}$ | | | 4.6 | m Ω |
| | | $V_{GS}=4.5\text{V}, I_D=16\text{A}$ | | | 5.5 | |
| Forward Transconductance ^a | g_{fs} | $V_{GS}=15\text{V}, I_D=20\text{A}$ | | 12 | | S |
| Diode Forward Voltage ^a | V_{SD} | $I_S=3.4\text{A}, V_{GS}=0\text{V}$ | | 0.76 | | V |
| Dynamic ^b | | | | | | |
| Total Gate Charge | Q_g | $V_{DS}=15\text{V}, V_{GS}=4.5\text{V}, I_D=20\text{A}$ | | 35 | | nC |
| Gate-Source Charge | Q_{gs} | | | 13 | | |
| Gate-Drain Charge | Q_{gd} | | | 13 | | |
| Turn-On Delay Time | $t_{d(on)}$ | $V_{DS}=15\text{V}, R_L=0.8\Omega, I_D=20\text{A}, V_{GEN}=10\text{V}, R_{GEN}=6\Omega,$ | | 11 | | ns |
| Rise Time | t_f | | | 16 | | |
| Turn-Off Delay Time | $t_{d(off)}$ | | | 76 | | |
| Fall Time | t_f | | | 27 | | |
| Input Capacitance | C_{iss} | $V_{DS}=15\text{V}, V_{GS}=0\text{V}, f=1\text{MHz}$ | | 3876 | | pF |
| Output Capacitance | C_{oss} | | | 410 | | |
| Reverse Transfer Capacitance | C_{rss} | | | 339 | | |

Note:


- a. Pulse test: $PW \leq 300\mu\text{s}$ duty cycle $\leq 2\%$.
- b. Guaranteed by design, not subject to production testing.



ACE7436M


N-Channel 30-V MOSFET

Typical Performance Characteristics

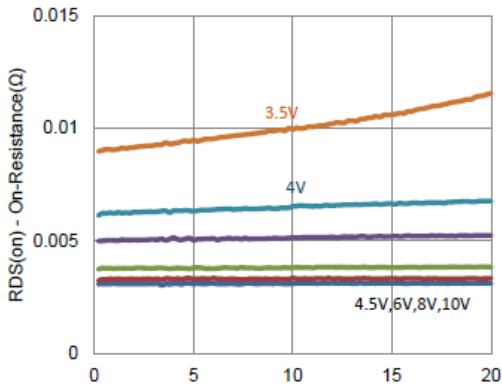


ID-Drain Current (A)

1. On-Resistance vs. Drain Current

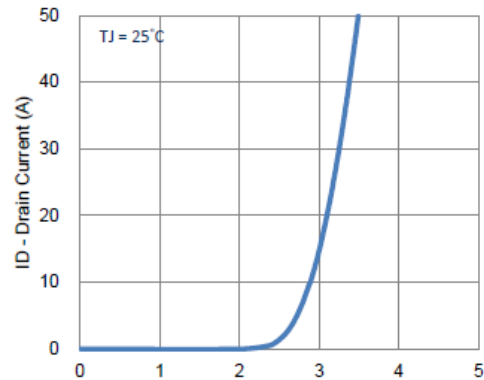


VGS - Gate-to-Source Voltage (V)

2. Transfer Characteristics

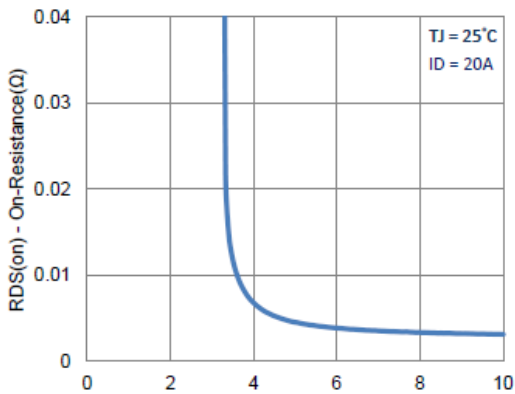


VGS - Gate-to-Source Voltage (V)

3. On-Resistance vs. Gate-to-Source Voltage

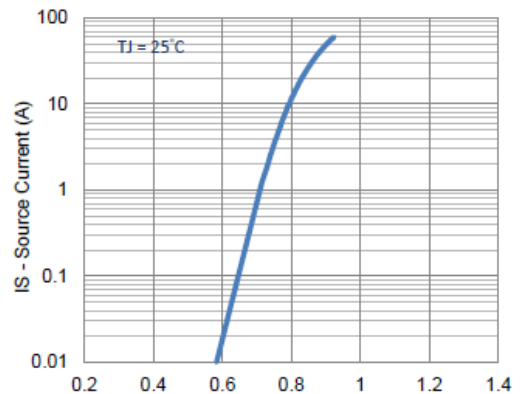


VSD - Source-to-Drain Voltage (V)

4. Drain-to-Source Forward Voltage

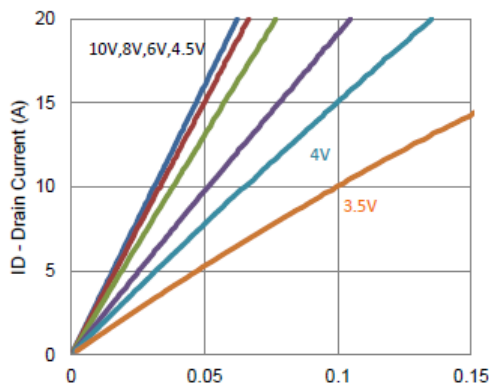

VDS - Drain-to-Source Voltage (V)

5. Output Characteristics

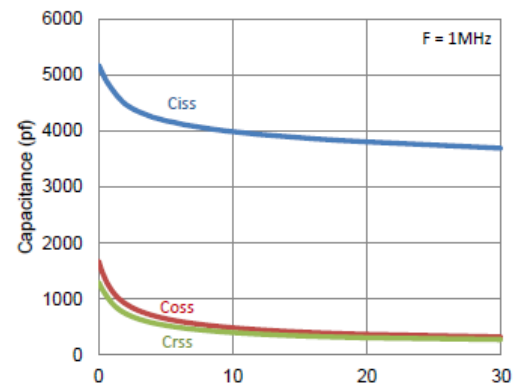

VDS-Drain-to-Source Voltage (V)


6. Capacitance




ACE7436M

N-Channel 30-V MOSFET


Typical Performance Characteristics

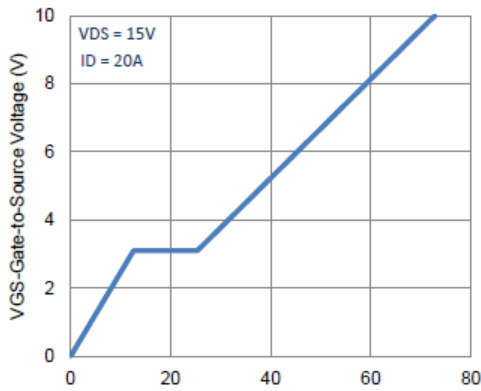


Qg - Total Gate Charge (nC)
7. Gate Charge

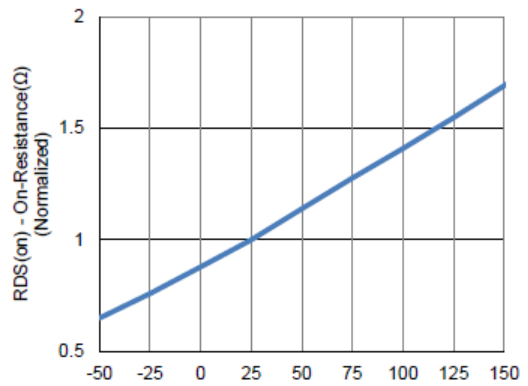


TJ - Junction Temperature (°C)
8. Normalized On-Resistance Vs Junction Temperature

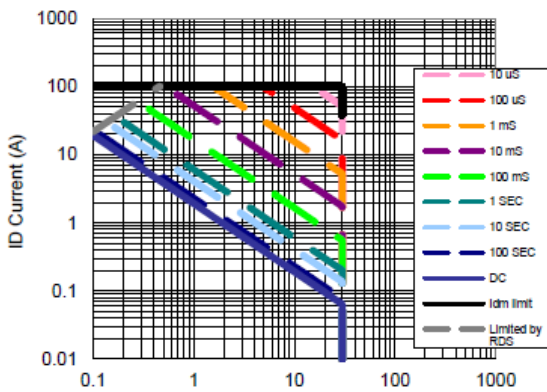

VDS Drain to Source Voltage (V)
9. Safe Operating Area

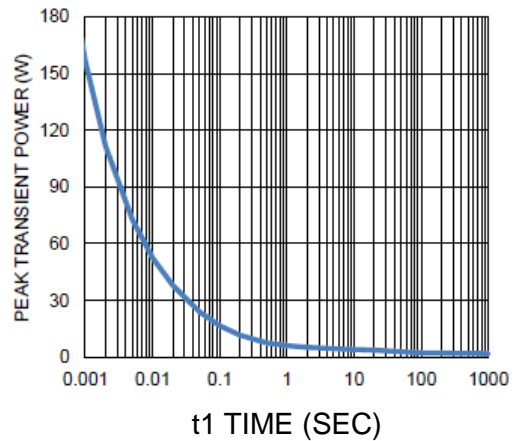

t1 TIME (SEC)
10. Single Pulse Maximum Power Dissipation

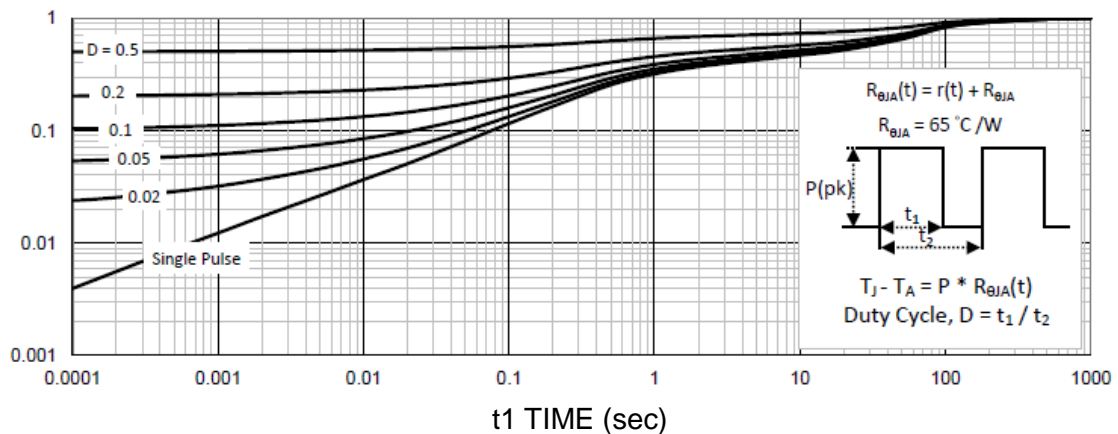

t1 TIME (sec)
11. Normalized Thermal Transient Junction to Ambient




ACE7436M

N-Channel 30-V MOSFET

Packing Information

DFN5*6-8L

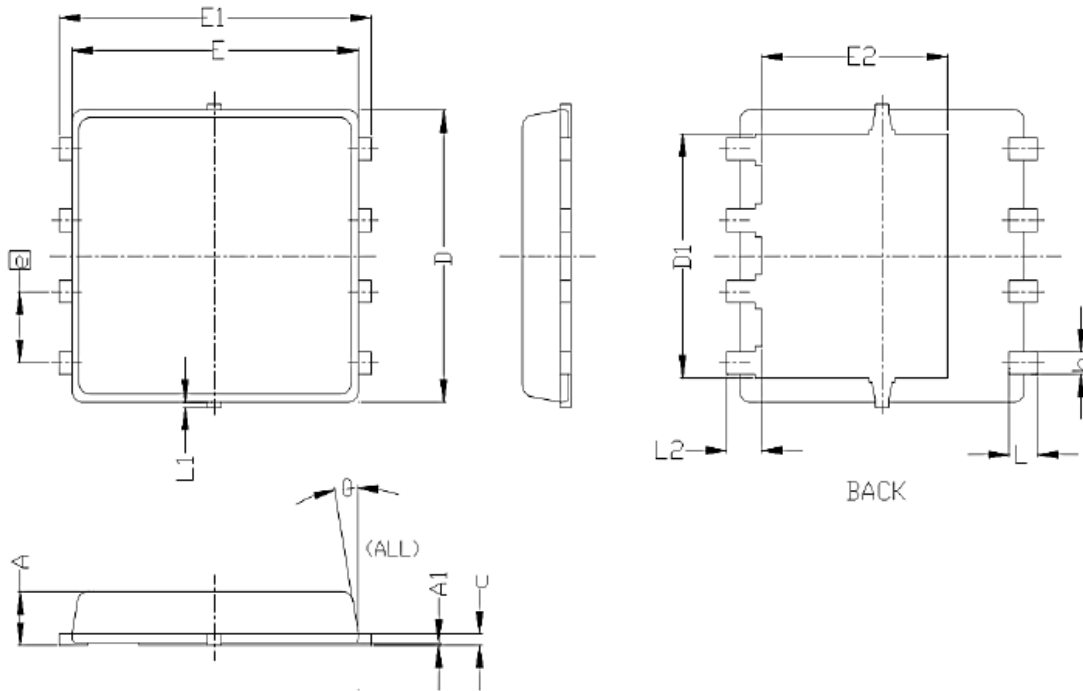

| SYMBOLS | DIMENSIONS IN MILLIMETERS | | | DIENSIONS IN INCHES | | |
|---------|---------------------------|------|------|---------------------|-------|-------|
| | MIN | NOM | MAX | MIN | NOM | MAX |
| A | 0.85 | 0.95 | 1.00 | 0.033 | 0.037 | 0.039 |
| A1 | 0.00 | | 0.05 | 0.000 | | 0.002 |
| b | 0.30 | 0.40 | 0.50 | 0.012 | 0.016 | 0.020 |
| c | 0.15 | 0.20 | 0.25 | 0.006 | 0.008 | 0.010 |
| D | 5.20 BSC | | | 0.205 BSC | | |
| D1 | 4.35 BSC | | | 0.171 BSC | | |
| E | 5.55 BSC | | | 0.219 BSC | | |
| E1 | 6.05 BSC | | | 0.238 BSC | | |
| E2 | 3.62 BSC | | | 0.143 BSC | | |
| e | 1.27 BSC | | | 0.050 BSC | | |
| L | 0.45 | 0.55 | 0.65 | 0.018 | 0.022 | 0.026 |
| L1 | 0 | | 0.15 | 0 | | 0.006 |
| L2 | 0.68 REF | | | 0.027 REF | | |
| θ | 0° | | 10° | 0° | | 10° |



ACE7436M

N-Channel 30-V MOSFET

Notes

ACE does not assume any responsibility for use as critical components in life support devices or systems without the express written approval of the president and general counsel of ACE Electronics Co., LTD. As sued herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

ACE Technology Co., LTD.
<http://www.ace-ele.com/>