

XP131A1715SR



Power MOS FET

- ◆N-Channel Power MOS FET
- ◆DMOS Structure
- ◆Low On-State Resistance : 0.012 Ω (max)
- ◆Ultra High-Speed Switching
- ◆SOP-8 Package

General Description

The XP131A1715SR is an N-Channel Power MOS FET with low on-state resistance and ultra high-speed switching characteristics.

Because high-speed switching is possible, the IC can be efficiently set thereby saving energy.

The small SOP-8 package makes high density mounting possible.

Applications

- Notebook PCs
- Cellular and portable phones
- On-board power supplies
- Li-ion battery systems

Features


Low on-state resistance : Rds (on) = 0.012Ω (Vgs = 4.5V)
 : Rds (on) = 0.015Ω (Vgs = 2.5V)
 : Rds (on) = 0.025Ω (Vgs = 1.5V)

Ultra high-speed switching

Operational Voltage : 1.5V

High density mounting : SOP-8

Pin Configuration




SOP-8
(TOP VIEW)

Pin Assignment

PIN NUMBER	PIN NAME	FUNCTION
1 ~ 3	S	Source
4	G	Gate
5 ~ 8	D	Drain

Equivalent Circuit



N-Channel MOS FET
(1 device built-in)

Absolute Maximum Ratings

Ta=25°C

PARAMETER	SYMBOL	RATINGS	UNITS
Drain - Source Voltage	Vdss	20	V
Gate - Source Voltage	Vgss	± 8	V
Drain Current (DC)	Id	10	A
Drain Current (Pulse)	Idp	40	A
Reverse Drain Current	Idr	10	A
Continuous Channel Power Dissipation (note)	Pd	2.5	W
Channel Temperature	Tch	150	°C
Storage Temperature	Tstg	-55 ~ 150	°C

(note) : When implemented on a glass epoxy PCB

Electrical Characteristics

DC Characteristics

Ta=25°C

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
Drain Cut-off Current	Idss	Vds = 20V , Vgs = 0V			10	μA
Gate-Source Leakage Current	Igss	Vgs = ± 8V , Vds = 0V			± 1	μA
Gate-Source Cut-off Voltage	Vgs (off)	Id = 1mA , Vds = 10V	0.5		1.2	V
Drain-Source On-state Resistance (note)	Rds (on)	Id = 5A , Vgs = 4.5V		0.009	0.012	Ω
		Id = 5A , Vgs = 2.5V		0.011	0.015	Ω
		Id = 5A , Vgs = 1.5V		0.017	0.025	Ω
Forward Transfer Admittance (note)	Yfs	Id = 5A , Vds = 10V		34		S
Body Drain Diode Forward Voltage	Vf	If = 10A , Vgs = 0V		0.8	1.1	V

(note) : Effective during pulse test.

Dynamic Characteristics

Ta=25°C

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
Input Capacitance	Ciss	Vds = 10V , Vgs = 0V f = 1 MHz		2000		pF
Output Capacitance	Coss			1000		pF
Feedback Capacitance	Crss			450		pF

Switching Characteristics

Ta=25°C

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
Turn-on Delay Time	td (on)	Vgs = 5V , Id = 5A Vdd = 10V		15		ns
Rise Time	tr			25		ns
Turn-off Delay Time	td (off)			95		ns
Fall Time	tf			15		ns


11

Thermal Characteristics


PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
Thermal Resistance (channel-ambience)	Rth (ch-a)	Implement on a glass epoxy resin PCB		50		°C / W

Typical Performance Characteristics


DRAIN CURRENT vs. DRAIN-SOURCE VOLTAGE

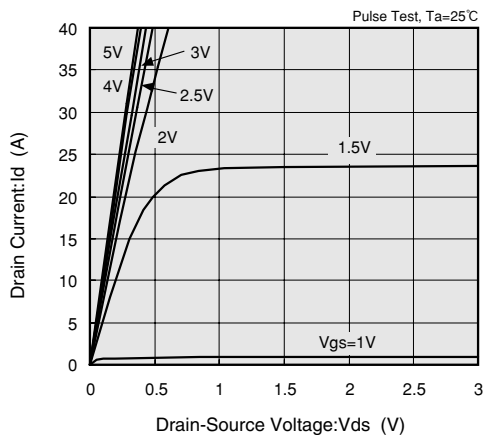


DRAIN CURRENT vs. GATE-SOURCE VOLTAGE

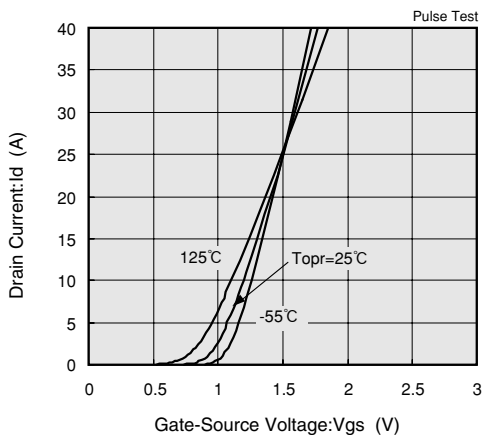


DRAIN-SOURCE ON-STATE RESISTANCE vs. GATE-SOURCE VOLTAGE

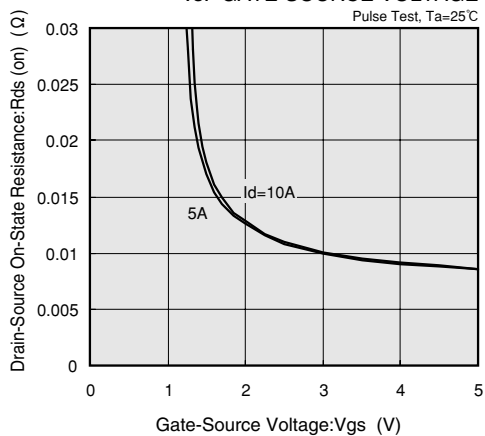


DRAIN-SOURCE ON-STATE RESISTANCE vs. DRAIN CURRENT

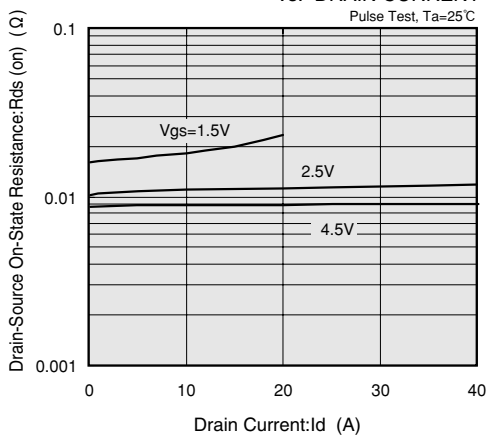


DRAIN-SOURCE ON-STATE RESISTANCE vs. AMBIENT TEMPERATURE

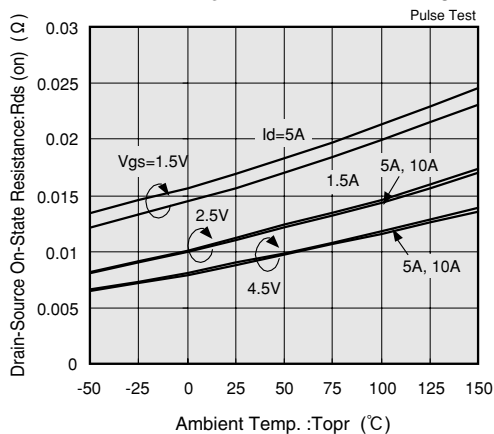


GATE-SOURCE CUT-OFF VOLTAGE VARIANCE vs. AMBIENT TEMPERATURE

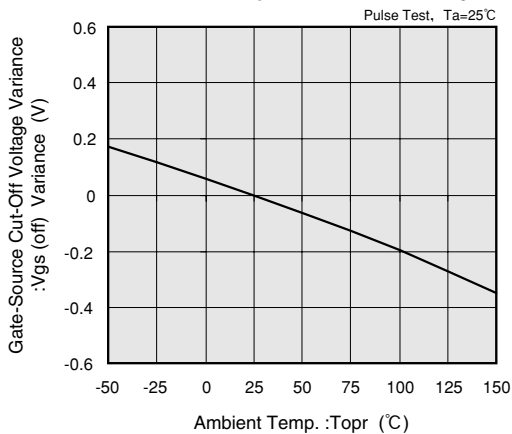


CAPACITANCE vs. DRAIN-SOURCE VOLTAGE

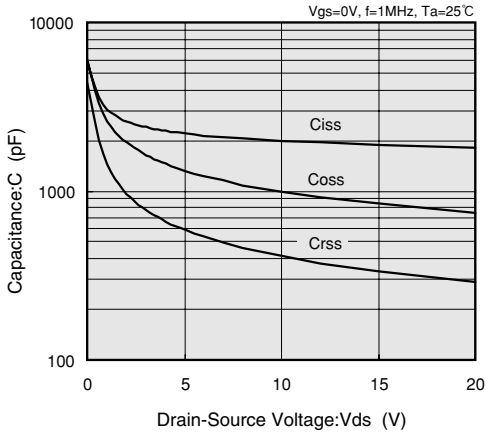


SWITCHING TIME vs. DRAIN CURRENT

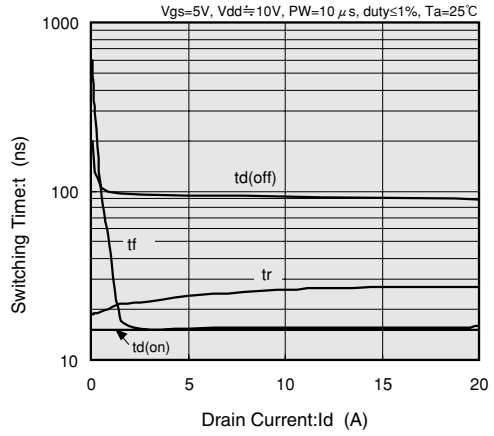

GATE-SOURCE VOLTAGE vs. GATE CHARGE

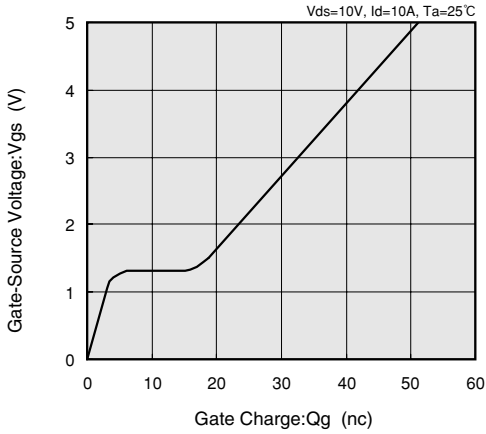

REVERSE DRAIN CURRENT vs. SOURCE-DRAIN VOLTAGE

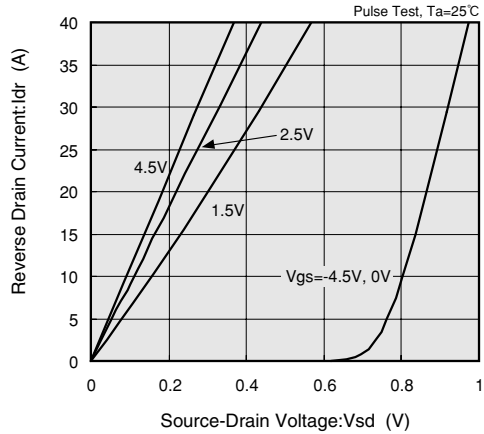

STANDARDIZED TRANSITION THERMAL RESISTANCE vs. PULSE WIDTH

