

DB3 THRU DB6

SILICON BIDIRECTIONAL DIAC

VOLTAGE: 36-70V**CURRENT: 2.0A**

FEATURES


Plastic passivated three-layer for triggering thyristors.
 Low breakover current at breakover voltage.
 For use in thyristor phase-control circuit for lampdimming,
 universal-motor speed control and heat controls.

MECHANICAL DATA

- Case:** Molded plastic
- Epoxy:** UL94V-0 rate flame retardant
- Lead:** MIL-STD- 202E, Method 208 guaranteed
- Polarity:** Color band denotes cathode end
- Mounting position:** Any
- Weight:** 0.33 grams

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.
 Single phase, half wave, 60 Hz, resistive or inductive load
 For capacitive load, derate current by 20%.

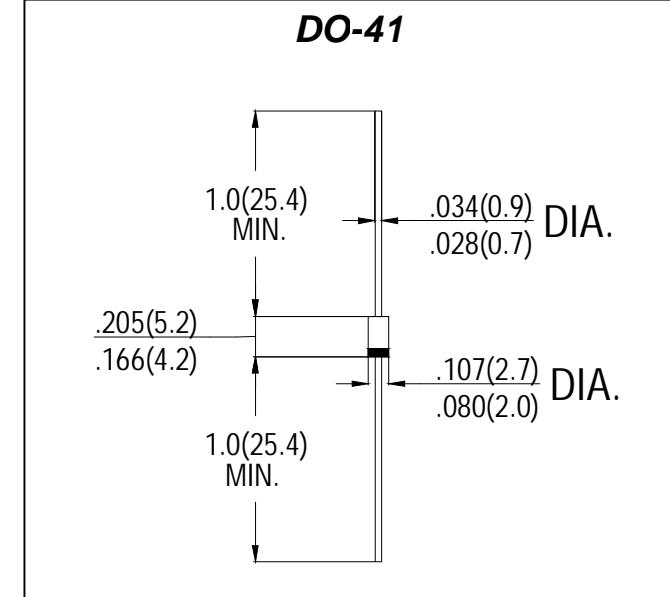

Dimensions in inches and (millimeters)

Type	Test Current I_{TRM}	Breakover Voltage V_{BO}		Breakover Voltage Symmetry $ +V_{BO} - - V_{BO} $	Dynamic Breakover Voltage $ \pm \Delta V $	Output Voltage V_o	Breakover Current I_{BO}	Rise Time t_r	Leakage Current I_B	Case Style
		Min	Max							
DB3	2	28	36	± 3	5	5	100	1.5	10	DO-41
DB4	2	35	45	± 3	5	5	100	1.5	10	DO-41
DB6	2	56	70	± 4	10	5	100	1.5	10	DO-41

Notes: 1. Electrical characteristics applicable in both forward and reverse directions.

2. Connected in parallel with the devices.