


HCMOS 6 pad SMD, 'W' Group

- Miniature 11.4 x 9.6 x 4.7mm SMD package
- Frequency range: 200.01MHz to 800.0MHz
- Supply voltage 3.3 Volts
- Frequency stability from ± 1 ppm over -30 to $+75^\circ\text{C}$
- RoHS compliant




DESCRIPTION

EMW64GT series TCXOs are packaged in a 6 pad SMD package with trimmer. With squarewave (CMOS) output, tolerances are available from ± 1.0 ppm over -30° to $+75^\circ\text{C}$. The part has a $0.01\mu\text{F}$ decoupling capacitor built in.

SPECIFICATION

Product Series Code	TCXO:	EMW64GT
	VCTCXO:	VEMW64GT
Frequency Range:	200.01MHz to 800.0MHz	
Output Waveform:	Squarewave, HCMOS	
Initial Calibration Tolerance:	$< \pm 2.0$ ppm at $+25^\circ \pm 2^\circ\text{C}$	
Standard Frequencies:	200.0, 204.8, 311.04, 400.0, 409.6 and 622.08MHz (Partial list)	
Mechanical Frequency Tuning:	± 3 ppm minimum	
Operating Temperature Range:	(see table)	
Frequency Stability	(see table)	
vs. Ageing:	± 1.0 ppm max. first year	
vs. Voltage Change:	± 0.3 ppm max. $\pm 5\%$ change	
vs. Load Change:	± 0.3 ppm max. $\pm 10\%$ change	
vs. Reflow (SMD type):	± 1.0 ppm max. for one reflow (Measured after 24 hours)	
Supply Voltage:	+3.3 Volts	
Output Logic Levels:	Logic High: 90% Vdd min. Logic Low: 10% Vdd max.	
Current Consumption:	65mA max. (Freq. dependant)	
Rise and Fall Times:	1.2ns typical	
Duty Cycle:	50% $\pm 5\%$	
Start-up Time:	5ms typical, 10ms max.	
Current Consumption:	See table below	
Output Load:	15pF	
Storage Temperature:	$-55 \sim +125^\circ\text{C}$	

EMW64GT - OUTLINES AND DIMENSIONS

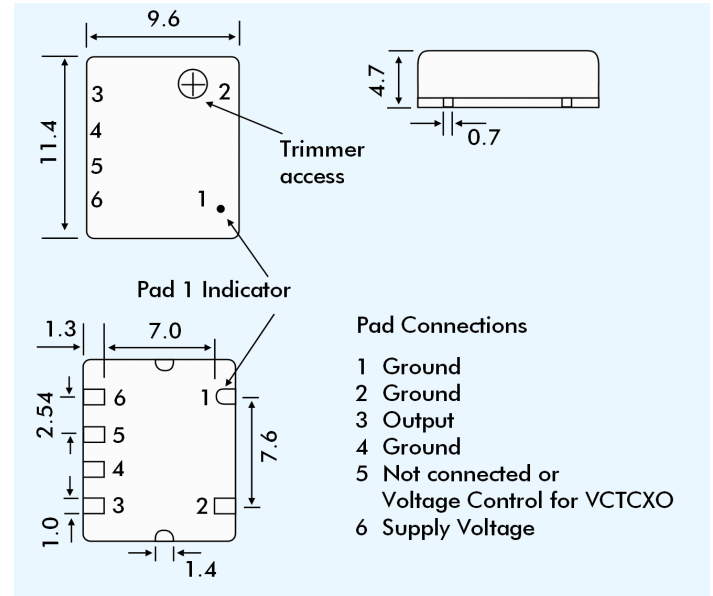

VEMW64GT VOLTAGE CONTROL SPECIFICATION

Control Voltage:	Standard = $+1.5 \pm 1.0$ Volts for all input voltages. (Contact technical sales if $+2.5 \pm 2.0$ Volts is required.)
Frequency Deviation:	± 6.0 ppm min. (Vcon = $+4.5\text{V} \pm 1.0\text{V}$)
Slope Polarity:	Positive (increase of control voltage increases output frequency.)
Input Impedance:	2M Ω minimum
Modulation Bandwidth:	25kHz minimum
Linearity:	$\pm 10\%$ maximum

FREQUENCY STABILITY

Stability (ppm)	± 0.5	± 1.0	± 1.5	± 2.0	± 2.5	± 3.0
Temp. Range ($^\circ\text{C}$)						
0 ~ +50	✓	✓	✓	✓	✓	✓
-10 ~ +60	ASK	✓	✓	✓	✓	✓
-20 ~ +70	X	✓	✓	✓	✓	✓
-30 ~ +75	X	✓	✓	✓	✓	✓
-40 ~ +85	X	X	X	ASK	ASK	✓

✓ = available, x = not available, ASK = call Technical Sales

SSB PHASE NOISE at 25°C

Offset	10Hz	100Hz	1kHz	10kHz	100kHz
Part = EMW64GT33 at 622.080MHz (dBc/Hz)	-50	-77	-102	-115	-108

PART NUMBERING SCHEDULE

Example: **EMW64GT33-409.60-2.5/-30+75**

Series Description: TCXO = EMW64GT*
 VCTCXO = VEMW64GT
 Supply Voltage: 33 = 3.3 VDC
 Frequency (MHz): 409.60
 Stability over OTR (\pm ppm): 2.5
 Operating Temperature Range (OTR) ($^\circ\text{C}$): -30+75
 Lower and upper limits

*Note: 'G' indicates part is RoHS compliant