


MINIATURE RELAY

2 POLES—1 to 2 A (FOR SIGNAL SWITCHING) FBR46 SERIES

■ FEATURES

- Miniature size
About 50% smaller in volume compared with the FBR240 series used mainly in communication equipment.
 - High surge voltage
2,500 V minimum of surge strength (Bellcore standard), and 1,500 VAC minimum of dielectric strength between coil and contact (-15, -16 type).
 - Low power consumption
85 mW of operate power (150 mW of nominal power consumption) by built-in permanent magnet.
 - Shipping tube package

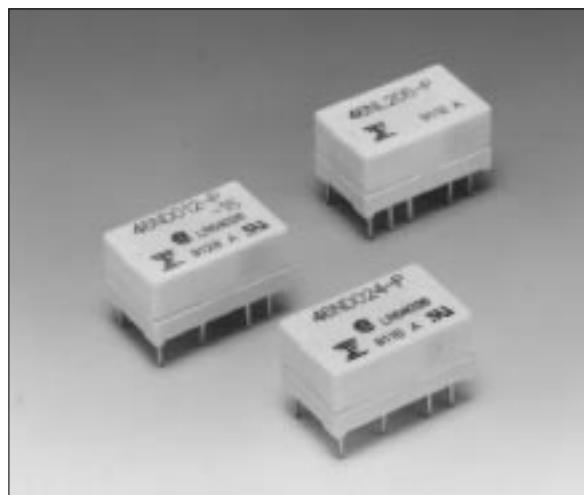

■ ORDERING INFORMATION

[Example] FBR46 N D 012 -P -15 -CSA
 (a) (b) (*) (c) (d) (e) (f)

(a)	Series Name	FBR46 : FBR46 Series	
(b)	Enclosure	N	: Plastic sealed
(*)	Coil Type	D : Standard, -15, -16 (DC coil) G : 65% Operate type L1 : Single winding latching type L2 : Double winding latching type (refer to the SPECIFICATIONS)	
(c)	Nominal Voltage	(Example) Standard, -15, -16 type 005: 5 VDC 012: 12 VDC (refer to the COIL DATA CHART)	
(d)	Contact Material	-P : Gold-overlay silver-palladium	
(e)	Dielectric Strength	Nil : Between coil and contacts 1,000 VAC, between contacts 750 VAC -15 : Between coil and contacts 1,500 VAC, between contacts 750 VAC -16 : Between coil and contacts 1,500 VAC, between contacts 1,000 VAC	
(f)	Safety Specification	Nil : Standard (UL114 recognized) -CSA : UL114 + CSA recognized	

Note: The designation name is stamped on the top of the relay case as follows:

(Example) Designation ordered: FBR46ND012-P

Stamp: 46ND012-P

FBR46 SERIES

■ SAFETY STANDARD AND FILE NUMBERS


UL114 (File No. E63615)

C22.2 No. 14 (File No. LR40304 or LR64026)

Nominal voltage	Contact rating
1.5 to 24 VDC	1 A 30 VDC resistive 0.5 A 120 VAC resistive

* Excluding latching type FBR46L

■ SPECIFICATIONS

Item		D type, G type	-15 type	-16 type	Latching
Contact	Arrangement and Style	2 form C (DPDT), bifurcated			
	Material	Gold-overlay silver-palladium			
	Resistance (initial)	Maximum 100 mΩ (at 0.1 A 6 VDC)			
	Ratings (resistive)	0.5 A 120 VAC or 1 A 30 VDC			
	Maximum Carrying Current	1.25 A			
	Maximum Switching Power	60 AV or 30 W			
	Max. Switching Voltage ^{*1}	125 V			
	Maximum Switching Current	1 A			
	Minimum Switching load ^{*2}	0.01 mA 10 mVDC (reference)			
	Electrostatic Capacity (reference)	Approximately 2 pF (between coil and contacts) Approximately 1 pF (between open contacts)			
Coil	Nominal power (at 20°C)	0.15 to 0.2 W 0.25 W	0.2 to 0.25 W		0.2 W
	Operate power (at 20°C)	0.085 to 0.112 0.106 W maximum	0.112 to 0.14 W maximum		0.128 W maximum
	Operating Temperature	-30°C to +70°C (no frost) (refer to the CHARACTERISTIC DATA)			
	Operating Humidity	45 to 85%RH			
Time Value	Operate (at nominal voltage)	Maximum 5 ms			
	Release (at nominal voltage)	Maximum 2 ms			
Insulation	Resistance (initial)	Minimum 1000 MΩ (at 500 VDC)			
	Dielectric Strength (for 1 minute)	between coil and contacts	1,000 VAC	1,500 VAC	1,000 VAC
		between adjacent contacts			
		between open contacts	750 VAC		750 VAC
	Surge Strength	between set-reset-coil	—		
		between coil and contacts	1,500 V (at 10 × 700 μs)	2,500 V (at 2 × 10 μs), 250 V (at 2,500 V, 2 μs)	1,500 V (at 10 × 700 μs)
		between adjacent contacts		2 μs 10 μs	
		between open contacts	1,500 V (at 10 × 700 μs)		1,500 V (at 10 × 700 μs)
					
					750 V
					10 μs 700 μs

Continued

FBR46 SERIES

www.DataSheet4U.com

Item		D type, G type	-15 type	-16 type	Latching	
Life	Mechanical	50×10^6 operations minimum				
	Electrical (refer to the REFERENCE DATA)	DC	2×10^5 operations minimum (at contact rating)			
Other	Vibration Resistance	10 to 55 Hz (double amplitude of 1.5 mm)				
	Shock Resistance	Misoperation	500 m/s^2 (11 ± 1 ms)			
	Endurance	Weight	$1,000 \text{ m/s}^2$ (11 ± 1 ms)			
		Approximately 2.5 g				

*¹ If the switching voltage exceeds the rated contact voltage, reduce the current. The current values vary according to the type of load.

*² Values when switching a resistive load at normal room temperature and humidity and in a clean environment. The minimum switching load varies with the switching frequency and operation environment.

■ COIL DATA CHART

1. STANDARD (D type)

MODEL	Nominal voltage	Coil resistance ($\pm 10\%$)	Nominal current (at nominal voltage) approx.	Must operate voltage ^{*1}	Must release voltage ^{*1}	Nominal power	Operate power	Coil temperature rise
FBR46ND003-P	3 VDC	60 Ω	50 mA	75% max. of nominal voltage	5% min. of nominal voltage	Approx. 150 mW (at nominal voltage)	Approx. 85 mW max.	Approx. 25 deg (at nominal voltage)
FBR46ND005-P	5 VDC	167 Ω	30 mA					
FBR46ND006-P	6 VDC	240 Ω	25 mA					
FBR46ND009-P	9 VDC	540 Ω	17 mA					
FBR46ND012-P	12 VDC	960 Ω	13 mA					
FBR46ND024-P	24 VDC	2,880 Ω	8 mA				200 mW	112 mW

*¹: Specified values are subject to pulse wave voltage.

Note: All values in the table are measured at 20°C

2. 65% OPERATE TYPE (G type)

MODEL	Nominal voltage	Coil resistance ($\pm 10\%$)	Nominal current (at nominal voltage) approx.	Must operate voltage ^{*1}	Must release voltage ^{*1}	Nominal power	Operate power	Coil temperature rise
FBR46NG003-P	3 VDC	36 Ω	83 mA	65% max. of nominal voltage	10% min. of nominal voltage	Approx. 250 mW (at nominal voltage)	Approx. 106 mW max.	Approx. 35 deg (at nominal voltage)
FBR46NG005-P	4.5 VDC	81 Ω	56 mA					
FBR46NG006-P	6 VDC	144 Ω	41 mA					
FBR46NG009-P	9 VDC	324 Ω	27 mA					
FBR46NG012-P	12 VDC	576 Ω	20 mA					
FBR46NG024-P	24 VDC	2,304 Ω	10 mA					

*¹: Specified values are subject to pulse wave voltage.

Note: All values in the table are measured at 20°C

FBR46 SERIES

www.DataSheet4U.com

3. HIGH DIELECTRIC STRENGTH TYPE (-15, -16 type)

MODEL		Nominal voltage	Coil resistance ($\pm 10\%$)	Nominal current (at nominal voltage) approx.	Must operate voltage ^{*1}	Must release voltage ^{*1}	Nominal power	Operate power	Coil temperature rise
-15 type	-16 type								
FBR46ND003-P-15	FBR46ND003-P-16	3 VDC	45 Ω	67 mA	75% max. of nominal voltage	5% min. of nominal voltage	Approx. 200 mW (at nominal voltage)	Approx. 112 mW max.	Approx. 30 deg (at nominal voltage)
FBR46ND005-P-15	FBR46ND005-P-16		125 Ω	40 mA					
FBR46ND006-P-15	FBR46ND006-P-16		180 Ω	33 mA					
FBR46ND009-P-15	FBR46ND009-P-16		405 Ω	22 mA					
FBR46ND012-P-15	FBR46ND012-P-16		720 Ω	17 mA					
FBR46ND024-P-15	FBR46ND024-P-16		2,304 Ω	10 mA					

*1: Specified values are subject to pulse wave voltage.

Note: All values in the table are measured at 20°C.


4. LATCHING TYPE (L1, L2 type)

MODEL		Nominal voltage	Coil resistance ($\pm 10\%$)	Nominal current (at nominal voltage) approx.	Must operate voltage ^{*1}	Must release voltage ^{*1}	Nominal power	Operate power
Single winding latching type	Double winding latching type							
FBR46NL103-P	FBR46NL203-P	3 VDC	45 Ω	67 mA	80% max. of nominal voltage	80% max. of nominal voltage	Approx. 200 mW (at nominal voltage)	Approx. 128 mW max.
FBR46NL105-P	FBR46NL205-P		125 Ω	40 mA				
FBR46NL106-P	FBR46NL206-P		180 Ω	33 mA				
FBR46NL109-P	FBR46NL209-P		405 Ω	22 mA				
FBR46NL112-P	FBR46NL212-P		720 Ω	17 mA				


*1: Specified values are subject to pulse wave voltage.

Note: All values in the table are measured at 20°C.

■ CHARACTERISTIC DATA

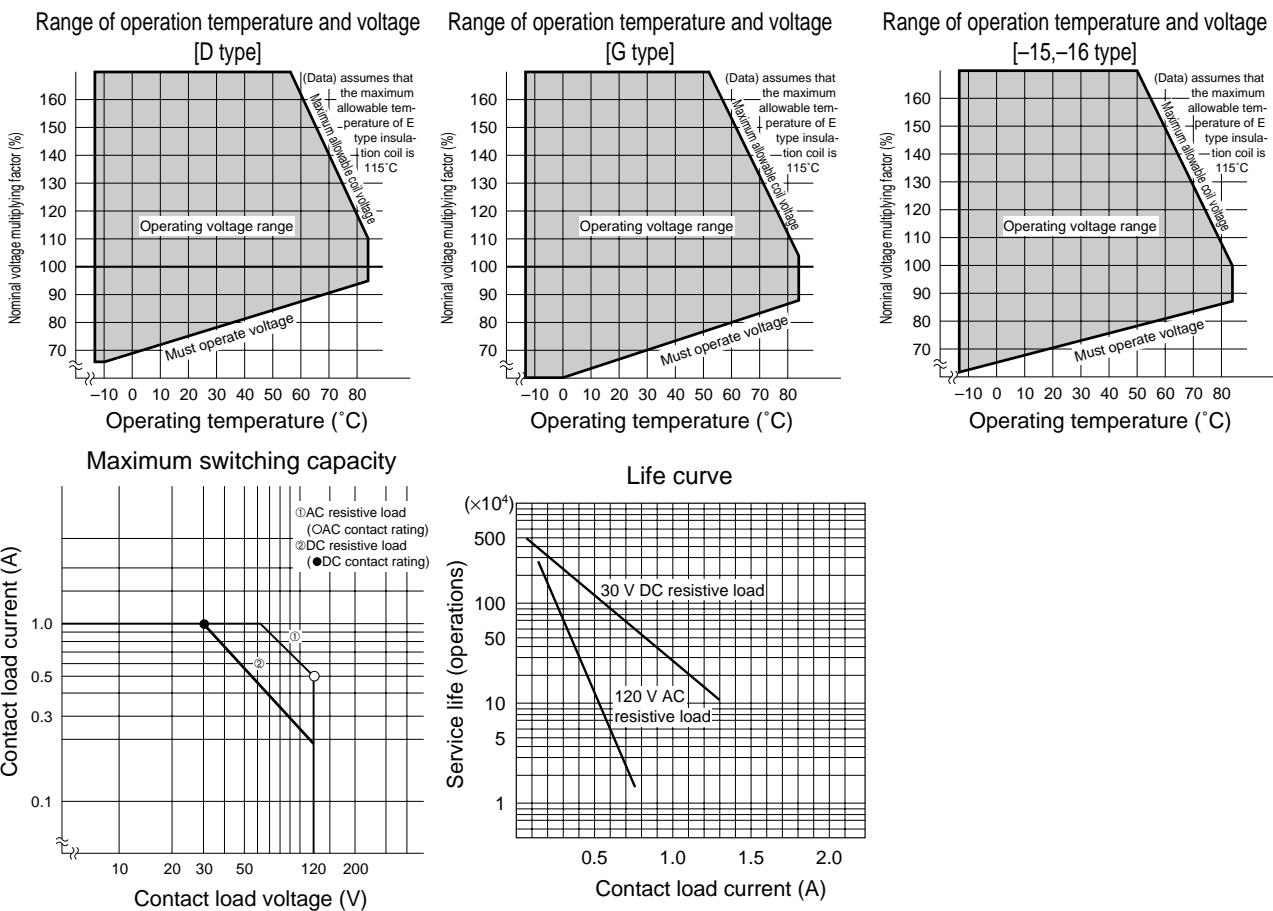


■ REFERENCE DATA

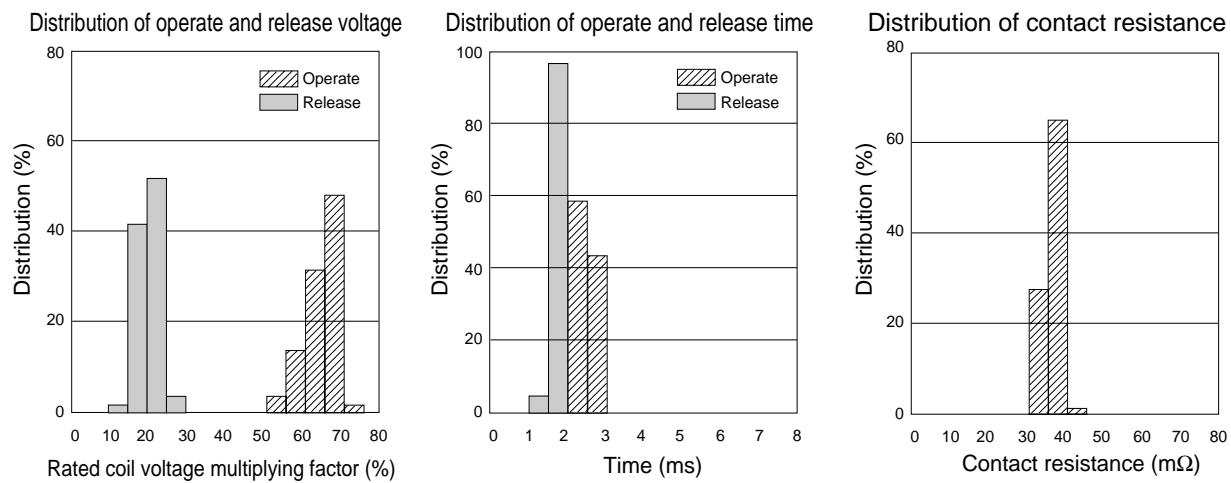


■ DIMENSIONS


● Dimensions

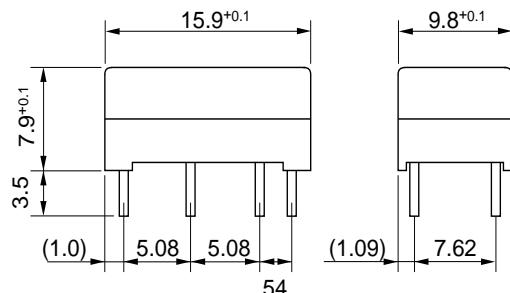


● Schematics (BOTTOM VIEW)

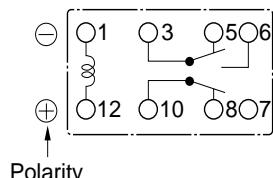


● PC board mounting hole layout (BOTTOM VIEW)

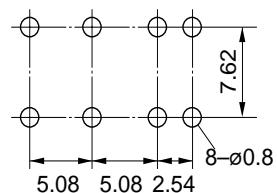


● Tube carrier

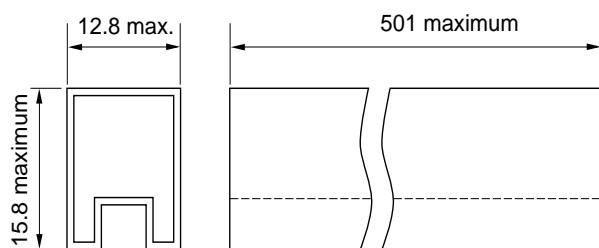


● Dimensions (Latching type)

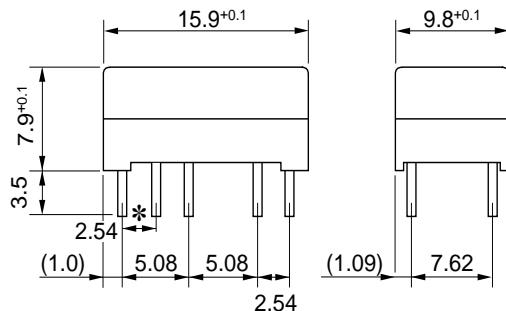


● Schematics (BOTTOM VIEW)

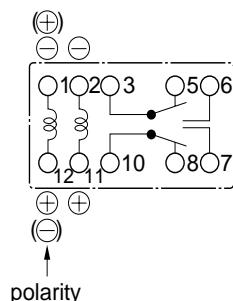

● PC board mounting hole layout (BOTTOM VIEW)

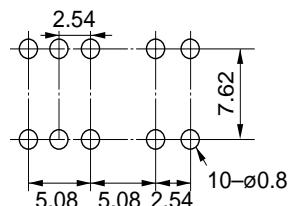

● Tube carrier

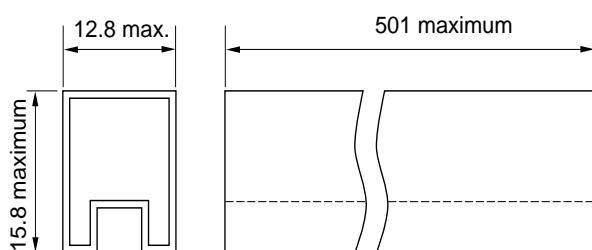

Note: ·No 2, 11 terminals are for double winding latching type only.
·(+) (-) are reset polarity for single winding latching type.
·The terminal number is not shown on the relay.

Unit: mm

FBR46 SERIES

www.DataSheet4U.com

Fujitsu Components International Headquarter Offices

Japan

Fujitsu Component Limited
Gotanda-Chuo Building
3-5, Higashigotanda 2-chome, Shinagawa-ku
Tokyo 141, Japan
Tel: (81-3) 5449-7010
Fax: (81-3) 5449-2626
Email: promothq@ft.ed.fujitsu.com
Web: www.fcl.fujitsu.com

North and South America

Fujitsu Components America, Inc.
250 E. Caribbean Drive
Sunnyvale, CA 94089 U.S.A.
Tel: (1-408) 745-4900
Fax: (1-408) 745-4970
Email: marcom@fcai.fujitsu.com
Web: www.fcai.fujitsu.com

Europe

Fujitsu Components Europe B.V.
Diamantlaan 25
2132 WV Hoofddorp
Netherlands
Tel: (31-23) 5560910
Fax: (31-23) 5560950
Email: info@fceu.fujitsu.com
Web: www.fceu.fujitsu.com

Asia Pacific

Fujitsu Components Asia Ltd.
102E Pasir Panjang Road
#04-01 CitiLink Warehouse Complex
Singapore 118529
Tel: (65) 6375-8560
Fax: (65) 6273-3021
Email: fcal@fcal.fujitsu.com
www.fcal.fujitsu.com

© 2003 Fujitsu Components America, Inc. All company and product names are trademarks or registered trademarks of their respective owners. Rev. 02/12/2003