

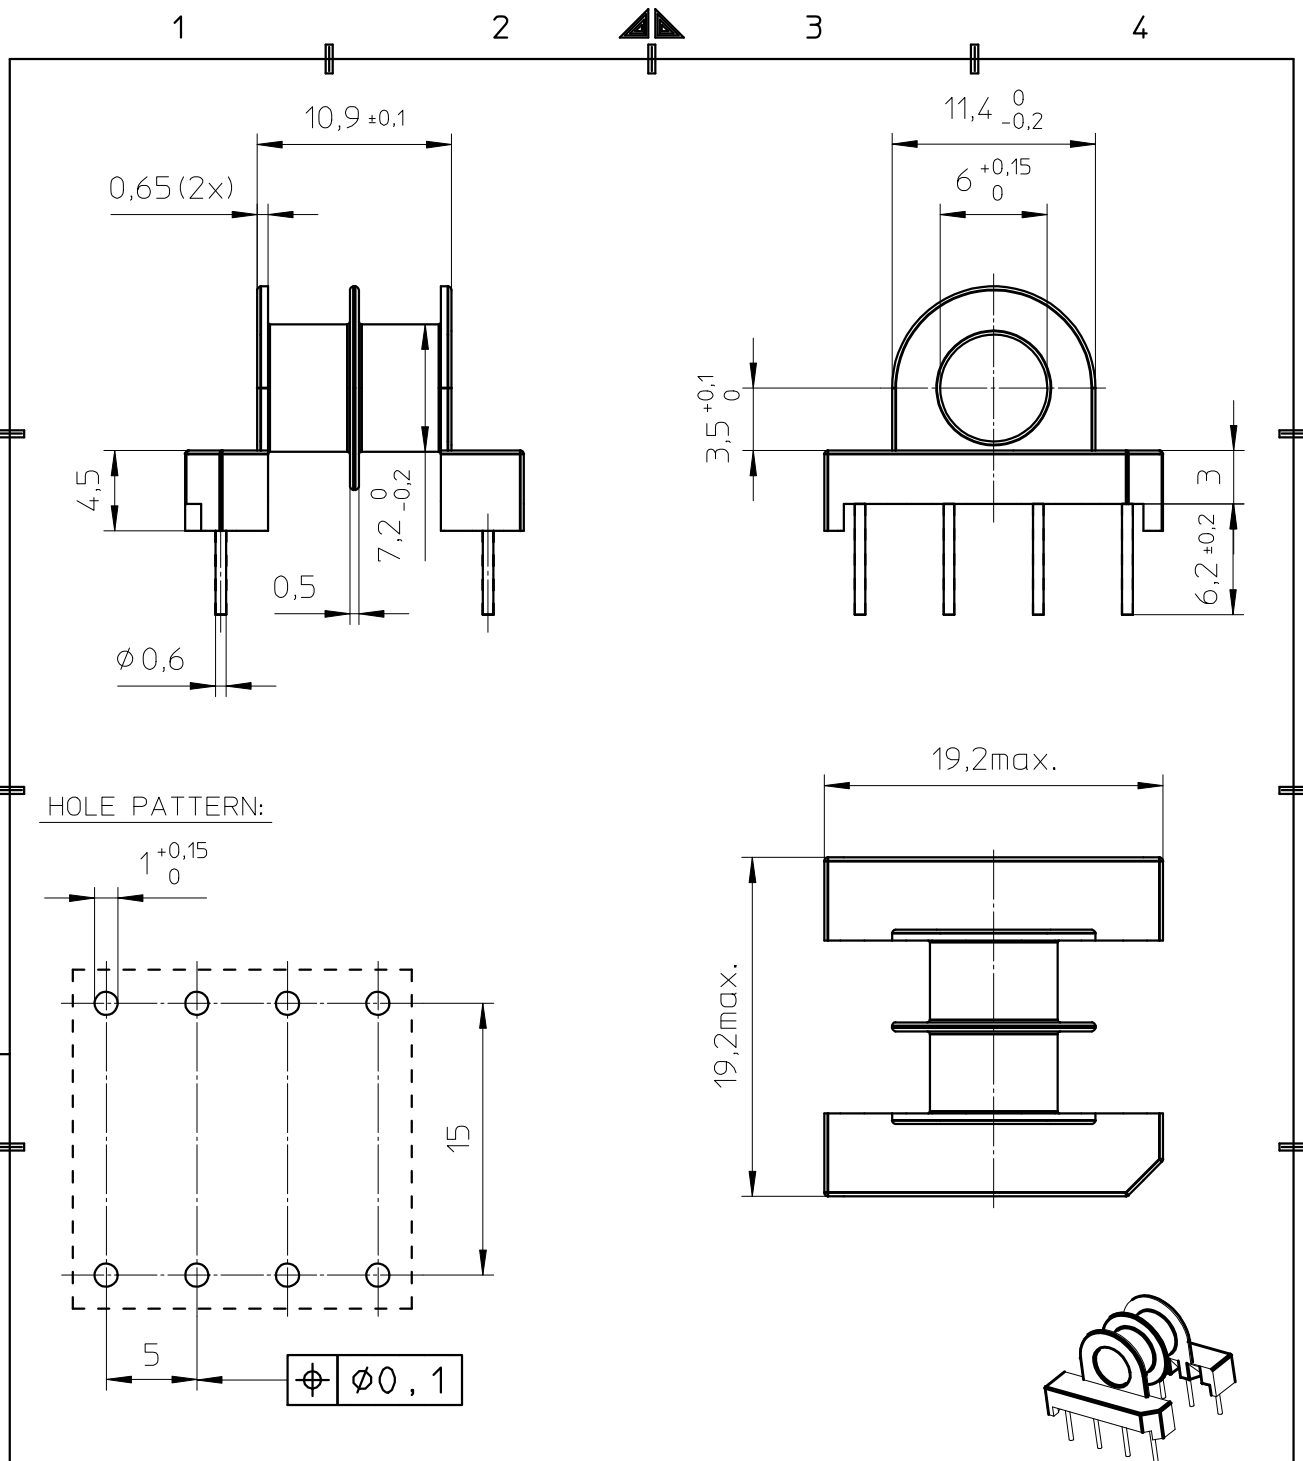



FERROXCUBE



Coil former material: Sumikon PM-9630 (PF), glass-reinforced.
 UL file number: E41429(M) - UL94V-0.
 Pin material: Copper-clad steel, Sn plated.
 Max. operating temp.: acc. to IEC 85 class H, 180°C.
 Resistance to soldering heat: acc. to IEC 68-2-20 Part 2, Test Tb, method 1A, 260°C - 5s.
 Solderability: acc. to IEC 68-2-20 Part 2, Test Ta, method 1, 235°C - 2s.
 Min. winding area: 17,4 mm².
 Mean length of turn: 28,9 mm.

| | | | | | | | |
|---------------------|--|----------------|------------------|-----------------------------|-----------|-------------------|----------|
| CLASS.NO. | | CSH-EP17-2S-8P | | 4322 021 00491 | | 96-06-07 | |
| 97-01-29 | | | | | | 96-09-20 | |
| | | | | | | 97-01-29 | |
| | | | | | | 98-01-28 | |
| NAME NAAM MPA | | A.Wojtasz | SUPERS. VERV. | 1 | SH BL. | 112 - 001 010 | 96-06-28 |
| CHECK CONTR. | | DAT. | 96-06-07 | Property of Eigendom van | | © FERROXCUBE 2000 | A4 |