


Film, Metallized Polypropylene, Power, C4AS, 0.47 uF, 5%, 1,200 V, 70C, Lead Spacing = 27.5mm

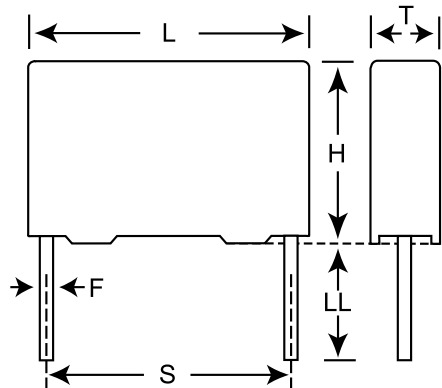

Dimensions	
L	32mm NOM
H	37mm NOM
T	22mm NOM
S	27.5mm +/-0.4mm
LL	6mm -2mm

Packaging Specifications	
Packaging:	Bulk
Packaging Quantity:	64

General Information	
Dielectric:	Metallized Polypropylene
Style:	Radial
Series:	C4AS
RoHS:	Yes
Lead:	Wire Leads

Specifications	
Capacitance:	0.47 uF
Capacitance Tolerance:	5%
Voltage DC:	1200 VDC
Voltage AC:	630 VAC
Temperature Range:	-40/+85C
Rated Temperature:	70C
Dissipation Factor:	0.05%
Max dVdt:	1,568 V
Resistance:	4.8 mOhms (100kHz)
Current:	14 Amps (100kHz 70C), 737 Amps (Peak)